LAMPRO

LC Series

LR3.91O

Make Your Event Cost Friendly

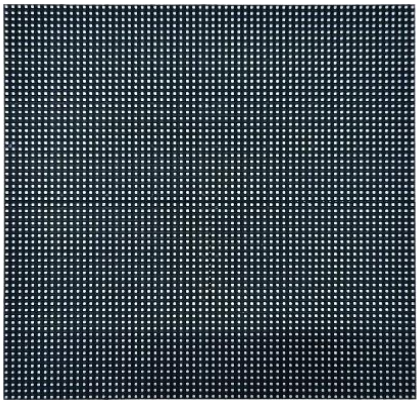

Product features:

- 250X250mm universal size
- Bottom case texture design, enhanced exterior texture
- High protection class LED lamp
- New design of PCB board is more reliable
- Waterproof and moisture-proof treatment with gluing on the front side
- High Brightness, High Heat Dissipation
- High refresh, High grayscale
- Excellent visual experience
- Supports 45° tangent angle*
- Support 7680Hz refresh*
- suitable for 500*500mm/500*1000mm rental cabinet
- Special environments such as coastal, low temperature, humidity, etc. require customized selection of appropriate products*

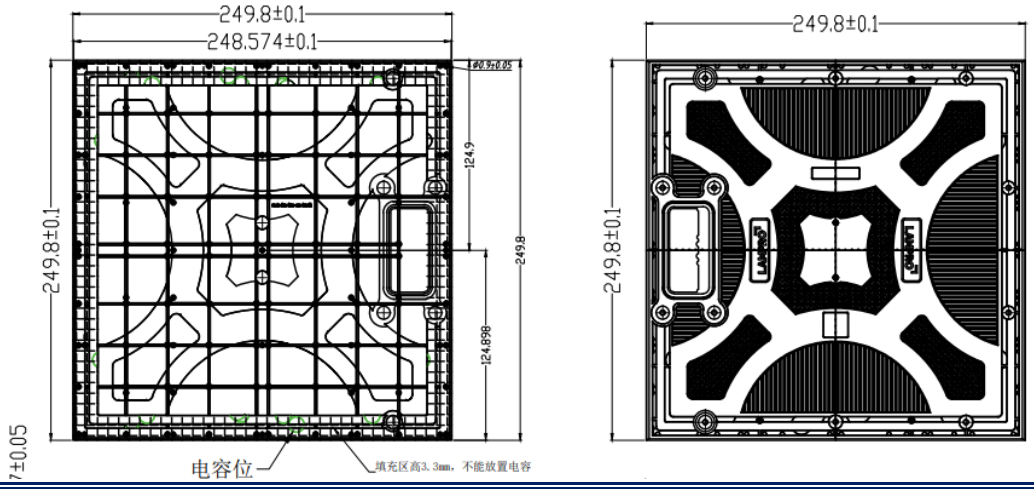

Note: Drawings are for reference only.

Address: 6 Lanjing North Road, Pingshan District, Shenzhen 518118 China
TEL: +86 - 755 – 27653939 E-mail : obu@lampro.net
Website: www.lampro.net
Update time: 2025/07/21 V2.1

LAMPRO

SPECIFICATION PARAMETERS:

	Parameter	Value
Module	Pixel Pitch	3.91mm
	LED Type	SMD1921
	Module Resolution（W×H）	64X64=4096 Pixels
	Pixel density（pixels/sq.m.）	68267 dot/㎡
	Module Size (WxHXD)	W250mmxH250mmxD15.6mm
	Module Weight	0.49±0.02kg
	HUB	HUB75
	Mask	Support
Optical	Single-dot Brightness Calibration	Support
	Brightness	4500 cd/㎡
	Color Temperature	6500K (1000K ~ 9500K Adjustable)
	Beam Angle（Hor/Ver°）	140°/120°
	Brightness/Color Uniformity	⩾98%
	Contrast Ratio	5000:1
Electronic	Max Power Consumption of Module（W）	⩽31.5W
	Input Power <Max>	630 W/㎡
	Input Power <Typical>	189 W/㎡
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63（Hz）
Performance	Frame Changing Frequency	60Hz
	Refresh Rate	7680Hz
	Processing Depth	12~14Bit
	Video Support	2K、4K
Environm	Life Span（hrs）	100000hrs
	Working Temp/Humidity（℃/RH）	-20℃~50℃ / 10%~80%RH (No Condensation)
	Storage Temp/Humidity（℃/RH）	-20℃~55℃ / 10%~85%RH (No Condensation)
	Certification	CE/CB/ROHS/EAC

Note:

1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

2.The specification parameters are reference values. Part of the data comes from Unilumin' s internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.

3. Different configurations can achieve different refresh rates.