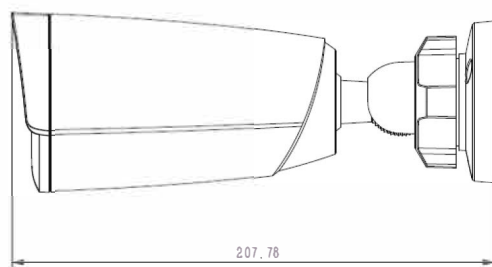# 8MP IP Warm Light Bullet Camera

BW-I1280-F88

Features

- Up to 3840 x 2160
- S+265/H.265/H.264 Codec
- Min. Illumination Color: 0.05 Lux,B/
  W: 0.01Lux,0 Lux with IR
- Smart IR, IR Range: 30m to 40m
- Operating Conditions -35°C~60°C(IR OFF) /-30°C~40°C
  (IR ON), 0~95% RHG
- PoE, IP67
- With Audio

Dimensions

Technical Specifications

Camera	
Image Sensor	1/2.9" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.05Lux
Shutter Time	1s to 1/100,000s
Lens	3.6mm
Lens Mount	M12
Day & Night	IR Cut Filter with Auto Switch
Wide Dynamic Range	100dB
Digital Noise Reduction	3D DNR
Compression Standard	
Video Compression	S+265/H.265/H.264
Video Bit Rate	32Kbps~8Mbps
Audio Compression	Yes
Audio Bit Rate	Yes
Network	
Network Storage	Y
NTP	Y
ANR	Y
Video Analytics	Y
EW	Y
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict
Protocols	TCP/UDP/HTTP /DHCP/DNS /NTP /RTSP
Remote Connection	Y
System Compatibility	ONVIF (Profile S)
Interface	
Audio Input	Y
Audio Output	Y
Communication Interface	1-ch RJ45 10M / 100M Ethernet Interface
Alarm Input	Y
Alarm Output	Y
Video Output	Y
On-board Storage	Y
Extension	Y
General	
Language	English,Simplified Chinese,Traditional Chinese,Spanish, Italian, Korean, Turkish, Russian, Thai, polish, French
Operating Conditions	-35°C~ 60°C, 0 ~ 95% RHG
Power Supply	DC 12 V ± 25%, POE
Power Consumption	MAX 7.5W (POE), MAX 6W (DC12V)
Warm Light	4
IR Distance	30m to 40m
White Light	Yes
Impact Protection	IP67
Dimensions	208mm (length) ×82mm (width) ×81mm (height)
Weight	0.6KG