

LOUIS MARTIN AUDIO

S-SERIES PROFESSIONAL SUBWOOFERS

USER MANUAL

Models Covered:

S-12 | S-18 | S-218

www.louismartinaudio.it | contact@louismartinaudio.it

Table of Contents

1. Introduction	3
2. S-12 – Single 12" Passive Subwoofer	4
2.1 Key Features	4
2.2 Technical Specifications	4
2.3 Dimensions & Views	5
3. S-18 – Single 18" Passive Subwoofer	6
3.1 Key Features	6
3.2 Technical Specifications	6
3.3 Dimensions & Views	7
4. S-218 – Dual 18" Passive Subwoofer	8
4.1 Key Features	8
4.2 Technical Specifications	8
4.3 Dimensions & Views	9
5. Safety Instructions	10
6. Warranty Information	11

1. Introduction

Welcome to the Louis Martin Audio S-Series Professional Subwoofer User Manual. This document covers three models from the S-Series lineup: the S-12 (Single 12" Passive Subwoofer), the S-18 (Single 18" Passive Subwoofer), and the S-218 (Dual 18" Passive Subwoofer).

The S-Series subwoofers are engineered for exceptional sound quality and reliability, powered by premium European drivers that deliver deep, impactful low-frequency reproduction with precision and consistency. Each model is crafted from multi-layer birch plywood enclosures, offering outstanding rigidity and acoustical integrity, ensuring durability and long-term performance.

These subwoofers are designed to meet the rigorous demands of both installation and rental markets, making them a robust and dependable solution for audio professionals seeking uncompromising performance.

About This Manual

This manual provides complete technical specifications, dimensional drawings, installation guidance, and safety instructions for each S-Series model. Please read all sections carefully before installation and operation.

2. S-12 – Single 12" Passive Subwoofer

S-12, Single 12" Passive Subwoofer



2.1 Key Features

- ▶ Portable & Fixed Installations
- ▶ 450W True RMS Power (900W Program / 1800W Peak)
- ▶ Front Loaded Design
- ▶ 12" High-Performance Driver with 3" Voice Coil
- ▶ Birch Plywood Construction with Polyurea Paint Finish
- ▶ Omnidirectional Dispersion
- ▶ 8 Ohm Nominal Impedance

Applications

Multipurpose halls, cafés, restaurants, gyms & fitness centres, retail spaces.

2.2 Technical Specifications


Type	Passive Subwoofer
Frequency Response (-10 dB)	38 Hz – 120 Hz
Drivers	1 × 12" High Performance Driver, 3" Voice Coil
Power – RMS	450 W
Power – Program	900 W
Power – Peak	1800 W
Sensitivity (1W/1m)	96 dB
Max SPL – Continuous (1m)	123 dB
Max SPL – Peak (1m)	126 dB
Nominal Impedance	8 Ohms
Dispersion	Omnidirectional
Cabinet Material	Birch Plywood with Polyurea Paint
Dimensions (H × W × D)	360 × 421 × 500 mm

Weight

20 kg / 44.1 lbs

2.3 Dimensions & Views

Nominal Impedance	8 ohms
Dispersion	Omnidirectional
Cabinet Material	Birch Plywood with Polyurea Paint
Size (mm)	360 x 421 x 500mm (H x W x D)
Weight (Kg)/Lbs	20/44.1

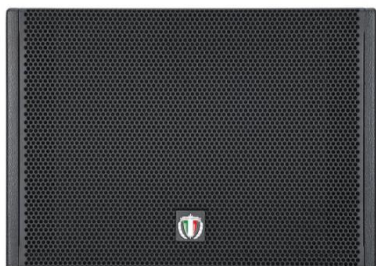

Front View



Rear View



Side View



Top View

WWW.LOUISMARTINAUDIO.IT | CONTACT@LOUISMARTINAUDIO.IT
© LOUIS MARTIN – ALL RIGHTS REVERSED

3. S-18 – Single 18" Passive Subwoofer

S-18, Single 18" Passive Subwoofer



3.1 Key Features

- ▶ Portable & Fixed Installations
- ▶ 1000W True RMS Power (2000W Program / 4000W Peak)
- ▶ Front Loaded Design
- ▶ 18" High Excursion Driver with 4.5" Voice Coil
- ▶ Birch Plywood Construction with Polyurea Paint Finish
- ▶ Omnidirectional Dispersion
- ▶ 8 Ohm Nominal Impedance

Applications

Night clubs, auditoriums, multi-functional halls, houses of worship.

3.2 Technical Specifications

Type	Passive Subwoofer
Frequency Response (-10 dB)	35 Hz – 120 Hz
Drivers	1 × 18" High Performance Driver, 4.5" Voice Coil
Power – RMS	1000 W
Power – Program	2000 W
Power – Peak	4000 W
Sensitivity (1W/1m)	99 dB
Max SPL – Continuous (1m)	131 dB
Max SPL – Peak (1m)	134 dB
Nominal Impedance	8 Ohms
Dispersion	Omnidirectional
Cabinet Material	Birch Plywood with Polyurea Paint
Dimensions (H × W × D)	560 × 690 × 700 mm

Weight	48 kg / 105.8 lbs
--------	-------------------

3.3 Dimensions & Views


Nominal Impedance	8 ohms
Dispersion	Omnidirectional
Cabinet Material	Birch Plywood with Polyurea Paint
Size (mm)	560 x 690 x 700mm (H x W x D)
Weight (Kg)/Lbs	48/105.8




Front View



Rear View



Side View



Top View

WWW.LOUISMARTINAUDIO.IT | CONTACT@LOUISMARTINAUDIO.IT
© LOUIS MARTIN – ALL RIGHTS REVERSED

4. S-218 – Dual 18" Passive Subwoofer

S-218, Dual 18" Passive Subwoofer



4.1 Key Features

- ▶ Portable & Fixed Installations
- ▶ 2000W True RMS Power (4000W Program / 8000W Peak)
- ▶ Front Loaded Design
- ▶ Dual 18" High Excursion Drivers with 4.5" Voice Coils
- ▶ Birch Plywood Construction with Polyurea Paint Finish
- ▶ Omnidirectional Dispersion
- ▶ 4 Ohm Nominal Impedance

Applications

Outdoor events, auditoriums, sports complexes, night clubs, multi-functional halls.


4.2 Technical Specifications

Type	Passive Subwoofer
Frequency Response (-10 dB)	35 Hz – 120 Hz
Drivers	2 × 18" High Performance Drivers, 4.5" Voice Coil
Power – RMS	2000 W
Power – Program	4000 W
Power – Peak	8000 W
Sensitivity (1W/1m)	102 dB
Max SPL – Continuous (1m)	138 dB
Max SPL – Peak (1m)	141 dB
Nominal Impedance	4 Ohms
Dispersion	Omnidirectional
Cabinet Material	Birch Plywood with Polyurea Paint
Dimensions (H × W × D)	580 × 1160 × 890 mm

Weight	78 kg / 171.9 lbs
--------	-------------------

4.3 Dimensions & Views

Nominal Impedance	4 ohms
Dispersion	Omnidirectional
Cabinet Material	Birch Plywood with Polyurea Paint
Size (mm)	580 x 1160 x890mm (H x W x D)
Weight (Kg)/Lbs	78/171.9

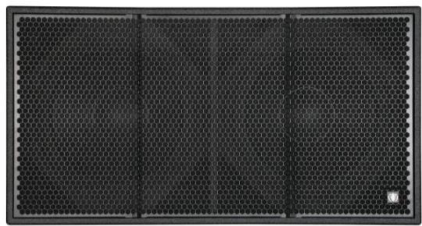


Front View



Rear View



Side View



Top View

WWW.LOUISMARTINAUDIO.IT | CONTACT@LOUISMARTINAUDIO.IT
© LOUIS MARTIN – ALL RIGHTS REVERSED

5. Safety Instructions

Flying & Suspension

- ▶ When flying speakers, appropriate hardware and techniques must be employed for safely suspending the enclosures.
- ▶ All speaker hardware and flying apparatus must be regularly inspected for any visual or mechanical failure.
- ▶ Leave adequate distance between speakers and the audience. Refer to your local authority for Health and Safety guidance when using loudspeaker systems.

Controller & Operation

- ▶ The Louis Martin digital controller should only be programmed by an authorized technician.
- ▶ Do not use Louis Martin loudspeaker systems without the correct controller and program.
- ▶ If a system fails due to incorrect controller use, warranty is void.

Environmental Protection

- ▶ Protect your speakers and electronics from exposure to humidity, water, or rain.
- ▶ Do not expose the cabinets to extreme temperatures or direct sunlight for prolonged periods.
- ▶ Ensure adequate ventilation around the enclosures during operation.

Electrical Safety

- ▶ Always verify amplifier impedance compatibility before connecting.
- ▶ Never exceed the maximum rated power input for any model.
- ▶ Ensure all connections are secure and properly insulated before powering the system.

6. Warranty Information

Coverage

The loudspeakers and electronics are covered against defects in workmanship or materials for a period of two years from the original date of purchase.

Exclusions

The warranty does not cover any item which in Louis Martin's opinion has failed due to:

- ▶ User abuse or misuse
- ▶ Accidental damage
- ▶ Unauthorized modifications
- ▶ Failure caused by incorrect controller use

Warranty Service

Defective items will be repaired or replaced with no charge for materials or labour. However, the item should be adequately packed and dispatched, pre-paid, to a Louis Martin authorized distributor/service centre.

Contact

For warranty claims or technical support, please contact Louis Martin Audio:

Website: www.louismartinaudio.it

Email: contact@louismartinaudio.it