



donsun.

PROJECT PROPOSAL


SMART ENERGY METERS FOR REIc Cameroon 2023

From

Donsun Technology
10H, 11 BLG, Software Park II,
Nanshan, Shenzhen 518057

Contact

sd@donsuntech.com
info@donsuntech.com
www.donsuntech.com

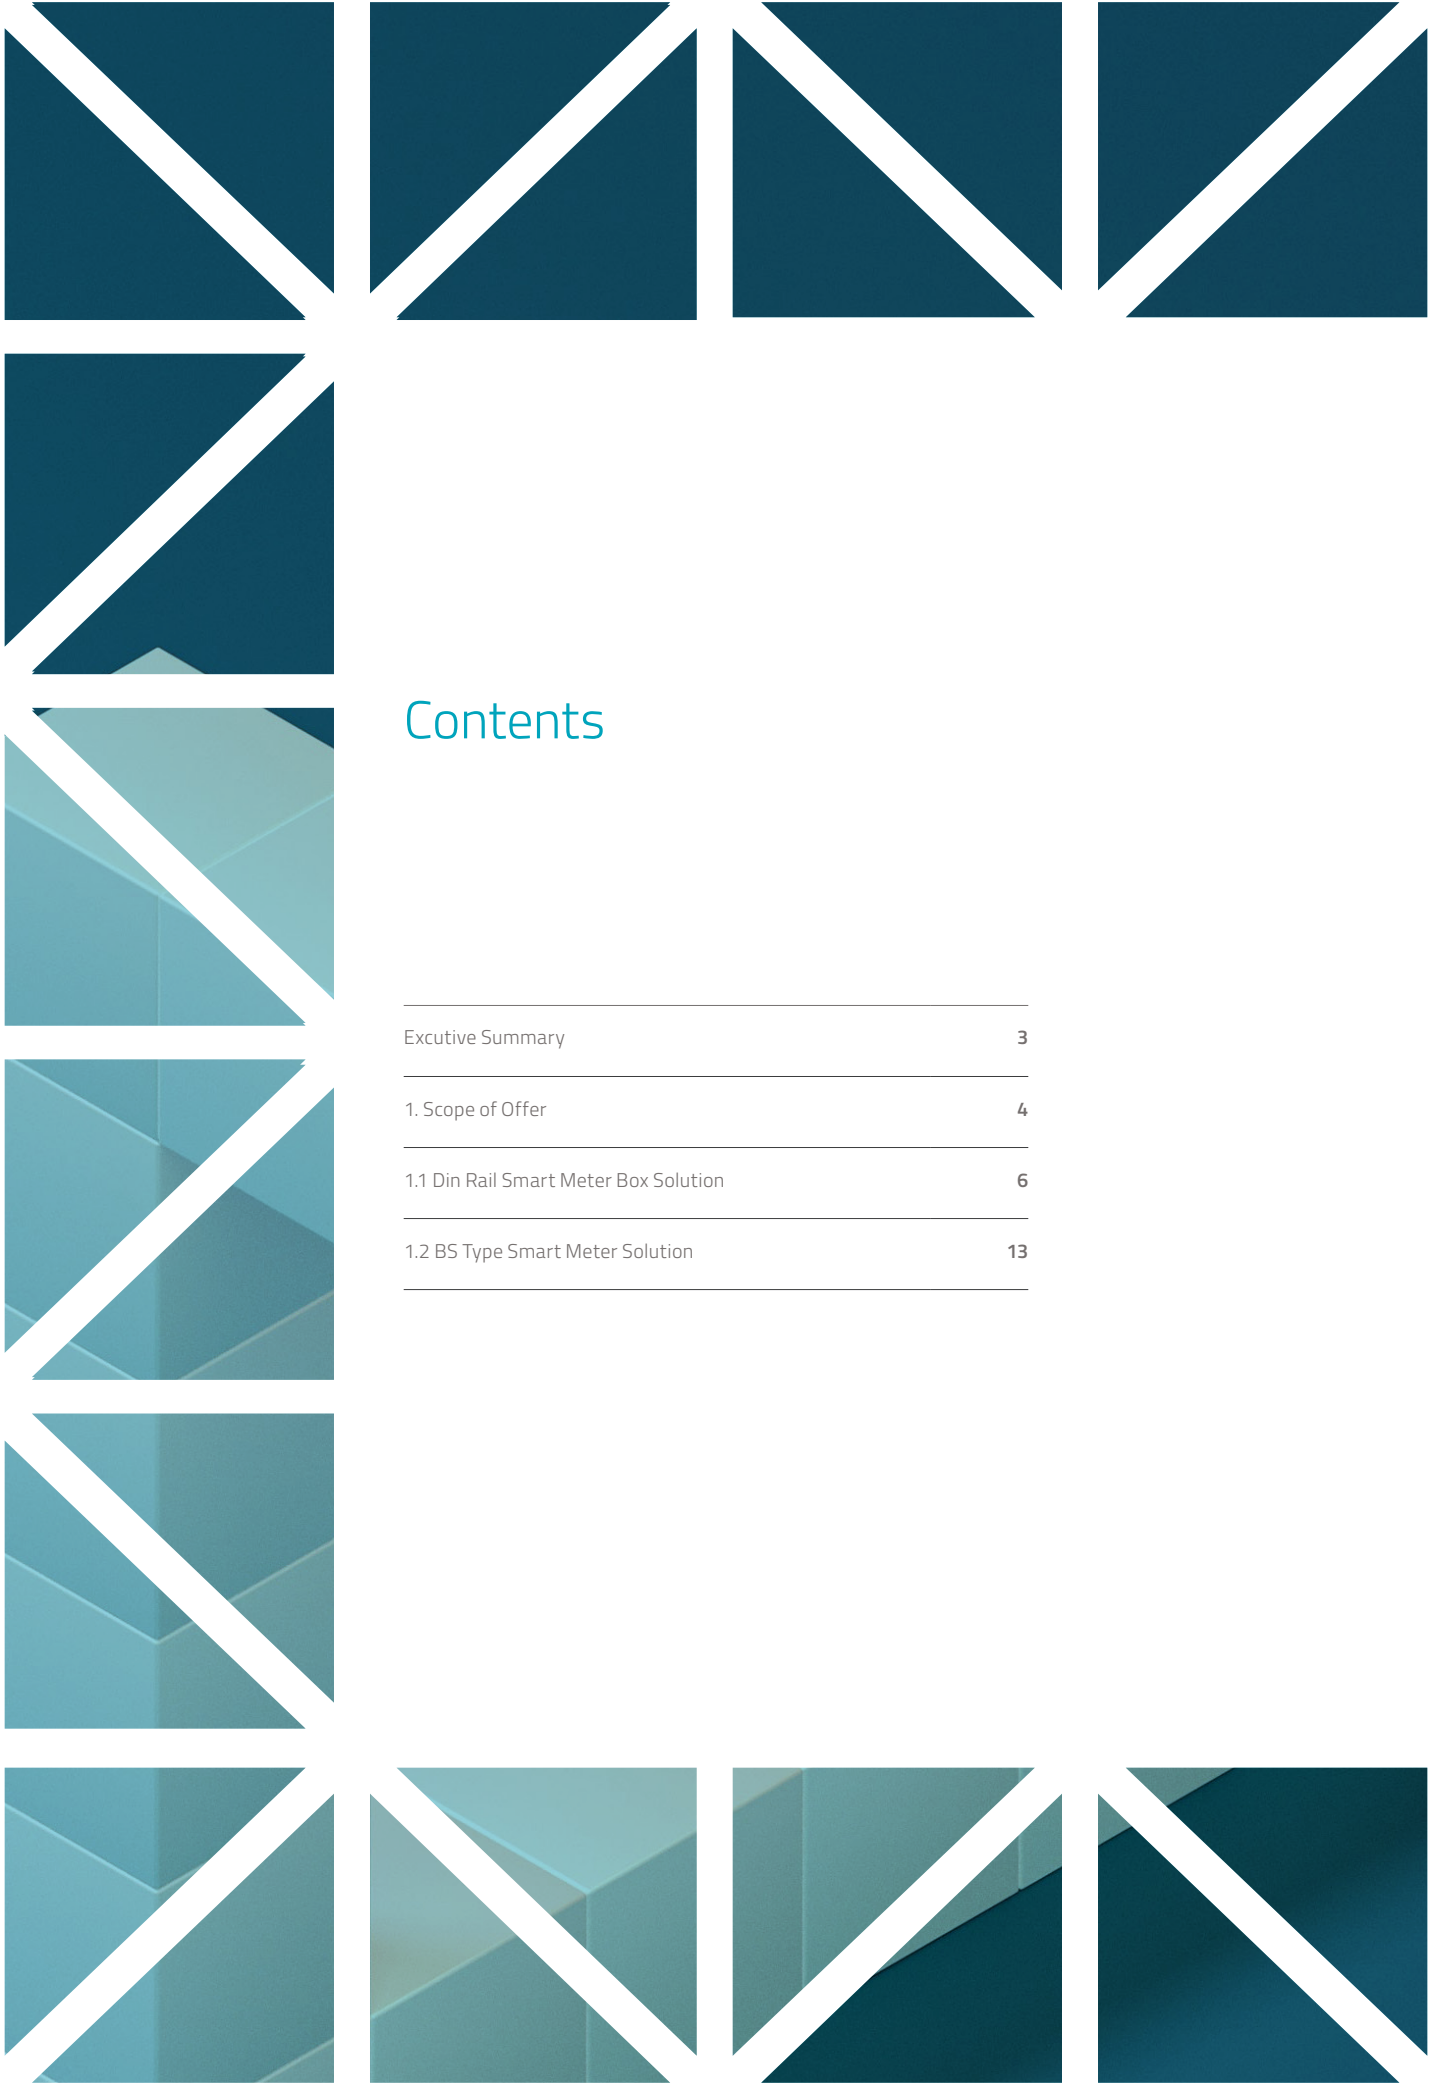

Contents

Excutive Summary	3
1. Scope of Offer	4
1.1 Din Rail Smart Meter Box Solution	6
1.2 BS Type Smart Meter Solution	13



EXECUTIVE SUMMARY



"The definition of an expert is someone who knows what not to do."

Hi,

Greetings. We, Shenzhen DONSUN Technology Co., Ltd., one leading manufacturer and solution provider in metering, are dedicated to provide the most effective and efficient solution to partners and customers in smart metering, as well as manufacturing solution.

WE ARE THE RESULT OF OUR HARD WORK.
OUR EXPERTISE MAKES US PIONEERS IN THIS INDUSTRY.

We work with clients big and small across the world and we are serving customers from Korea, Nigeria, Indonesia, Chile, Germany, Ghana, Tunisia and many more. We believe that analysis of your business and your customers is key in responding effectively to your electrification needs and we will work with you to fully understand your business to achieve the greatest amount of revenue possible so that you can see a return from the investment. We have different teams that specialize in different areas of technology of metering and communication, so you can be sure that you won't receive a generic service and although we can't boast years and years of service, we can ensure you that is the best in this industry.

We will work with you to fully understand your business and your target customer to deliver the best solution. Using the outcome from the Project Analysis, we will put together a plan for the most effective solution to get the best results for your project and investment.

Our offered solution and products are of high quality and compliant with the latest international standards and local Nigerian requirements. Besides providing the most optimal solution to the you, we also give full support to installation, operation and maintenance.

More value added services are provided to marketing, analytics and production. We give regular and long-term service to empower SteamaCo. to be a dominant provider in the market.

We wish you great success in every of your endeavour.

Sincerely,

1

Scope of Offer

We do not offer just products, but the full set of solution to boost your business and industrial capacity.


VISIT
DONSUN TECHNOLOGY
WWW.DONSUNTECH.COM



CHAPTER 2.1

SOLUTION - OPTION 1

DIN RAIL SOLUTION

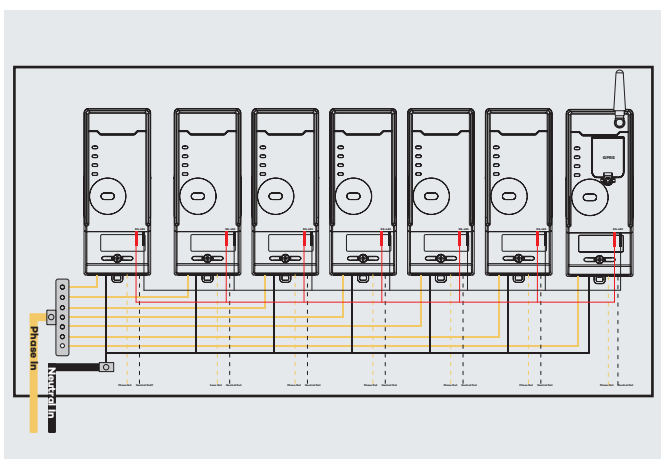

SMART DIN RAIL METER BOX SOLUTION



Donsun Smart Din Rail Meter Box is an AMI ready solution with sophisticated anti-tampering features. Donsun Smart Din Rail Meter Box is a bespoke solution aims to improve the revenue of the customer at affordable cost. It includes smart meter with easy-switchable payment modes, smart data collector with GPRS communication to AMI platform. Donsun Smart Din Rail Meter Box features high flexibility and enhanced versatility, through integrated master station and smart metering cabinet to support meter reading (On-demand & scheduled), remote control, load profile management, data analysis, line loss, revenue collection, alarm & event collection & management, device management and customer management.

The proposed option 1 is made in modular installation. It facilitates the installation of the meters in the field. With front pannel for the protection of its wiring and meters. It is an ideal solution in low cost smart metering. With reduced cost in communication and installation, it enables AMI implementation with affordable prices. On the other hand, it does not support swappable communication module.

QUALITY IS OUR PRIME CONCERN WITH IMPECCABLE DESIGN. WE OFFER NOTHING BUT THE BEST AT MOST COMPETITIVE COST.

SOPHISTICATED REVENUE PROTECTION



With enhanced anti-tampering and no access to the check meters, Donsun Smart

Din Rail meter Box Solution offers sophisticated revenue protection to customer in scenarios as:

- » Loss due to tamper on wirings;
- » Loss due to by-pass for unmetered customers;
- » Technical loss;

DONSUN SMART DIN RAIL SOLUTION AIMS



Not just the meters, but we also provide full smart metering solutions including vending and data reading APP, HES and other systems. It aims to improve the revenue of the customer in the following aspects:

- » Help reduce energy theft;
- » Full control and visibility of energy flow from entry point to the final consumer;
- » Independently verify or determine the actual energy/consumption of customers;
- » Determination of actual consumption of all customers including metered, unmetered customer or illegally connected customers;
- » Immediately identify and flag meters that lack integrity;
- » Affordable prices



SOLUTION BENEFITS

>> KEY BENEFITS



Revenue Protection



No access to meters by the customer to nullify any tampering

The meters are installed in protected enclosure with opening detection on high position of the pole which prevents any kind of tampering by the customers. While multiple meters share the same enclosure and incoming supply, any tampering by any individual customer would affect the consumption of others.



Customer Convenience



Customer now can recharge their meter conveniently

With remote communication of the meter, customer can recharge their meter remotely and locally via the CIU installed at their home. Different ways of recharge are also enabled such as smart phone App, mobile USSD, mobile wallet or web interface, additionally recharge message is sent to customer for archive and notification to ease the usage of energy.



Operation Optimization



Lower cost and higher efficiency for any project

Multiple meters are installed inside one meter enclosure which shares the same controller, saving cost of installation and communication and more cost-effective than traditional installation, enabling easy installation and customization as per the actual customer site and requirement and applications.




Full AMI Application



With Donsun CMS, full AMI are available for smart metering

Full AMI features as line loss calculation, demand control, event alarm, power quality analysis, customer consumption analysis as well as remote control of consumption are all available to the customer, with integration of remote management of consumption and load.

>> Working principle

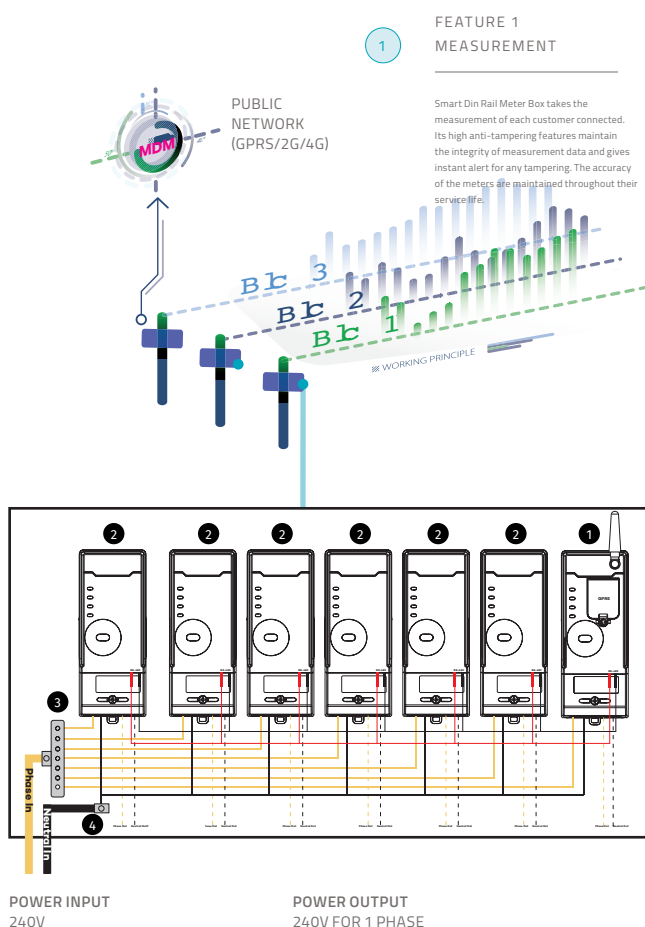

Note: Diagram for illustration only. Dimension scale is not applied.

INTELLIGENT DATA BOX Working Diagram



Routing Meter

Besides energy measurement, the routing meter also passthrough data between other meter and HES for data collection. No data of other meters are saved in routing meter except for its own metering data.



Din Rail Meter

The Din Rail meters are connected to the Routing meter by RS485 bus. It receives and sends data via the routing meter. It has no remote communication module inside for cost effectiveness.



Phase Plate

The phase plate is used to divide the phase to each of the customer and meter to keep correct measurement.



Neutral Connector

The neutral connector is to divide neutral to each of the meter to maintain the correct measurement.

SYSTEM COMPONENTS

DONSUN Smart Din Rail Meter Box solution contains three layers of structures, namely Customer Interface Unit (CIU), Din Rail Meter with measurement meters and routing meter, which is installed on the upstream of the power line of the customer, and AMI platform. Detailed are explained as following.

CUSTOMER INTERFACE UNIT

Each meter has the option of communicating with a CIU – Customer Interface Unit with PLC or RF communication or accessible via a downloadable application free to customer.

DIN RAIL METER

STS compliant smart din rail meter for the measurement of each of the customer. Installed on pole where inaccessible to customer to protect the revenue of the energy company. Connects to the routing meter for the communication with the AMI platform.

DIN RAIL ROUTING METER

Smart Din-Rail Meter with GPRS and RS-485. The routing meter is a measurement meter as well, while it also connects other din rail meters to the AMI platform. The meter data will be sent to the AMI platform at defined interval (15 mins programmable).


COMMUNICATION MODULE

The metering units will be connected to a common communication module inside the din rail routing meter (General Packet Radio Service (GPRS), 4G, 3G) to transfer data to Head End System (HES) and other required applications and system within the AMI ecosystem.


HES/MDM

It allows to generate actionable reports, store data and report consumptions.

>> Working principle

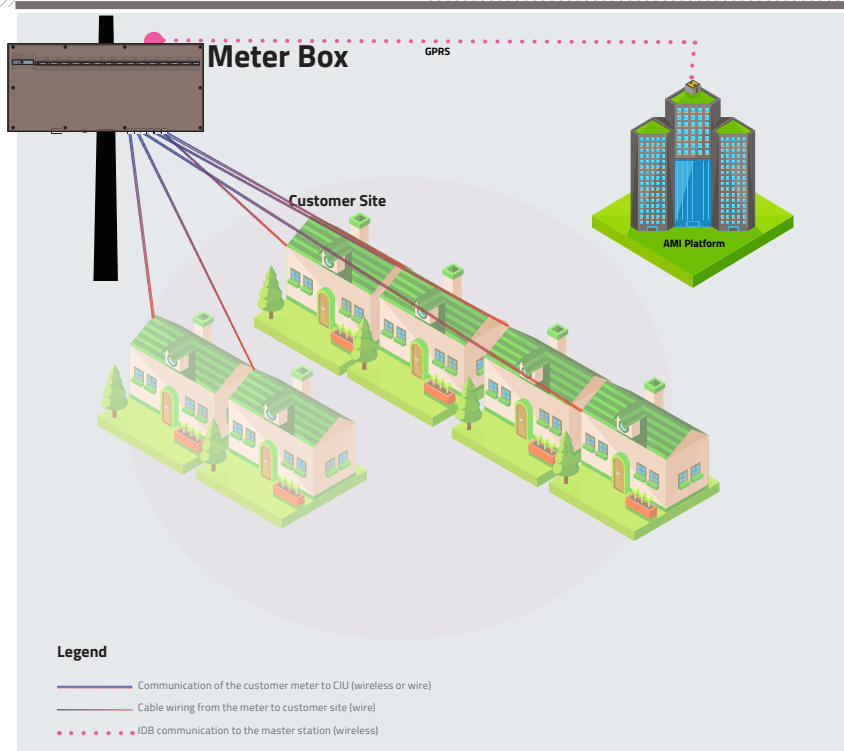

Install in an enclosure (4-way)

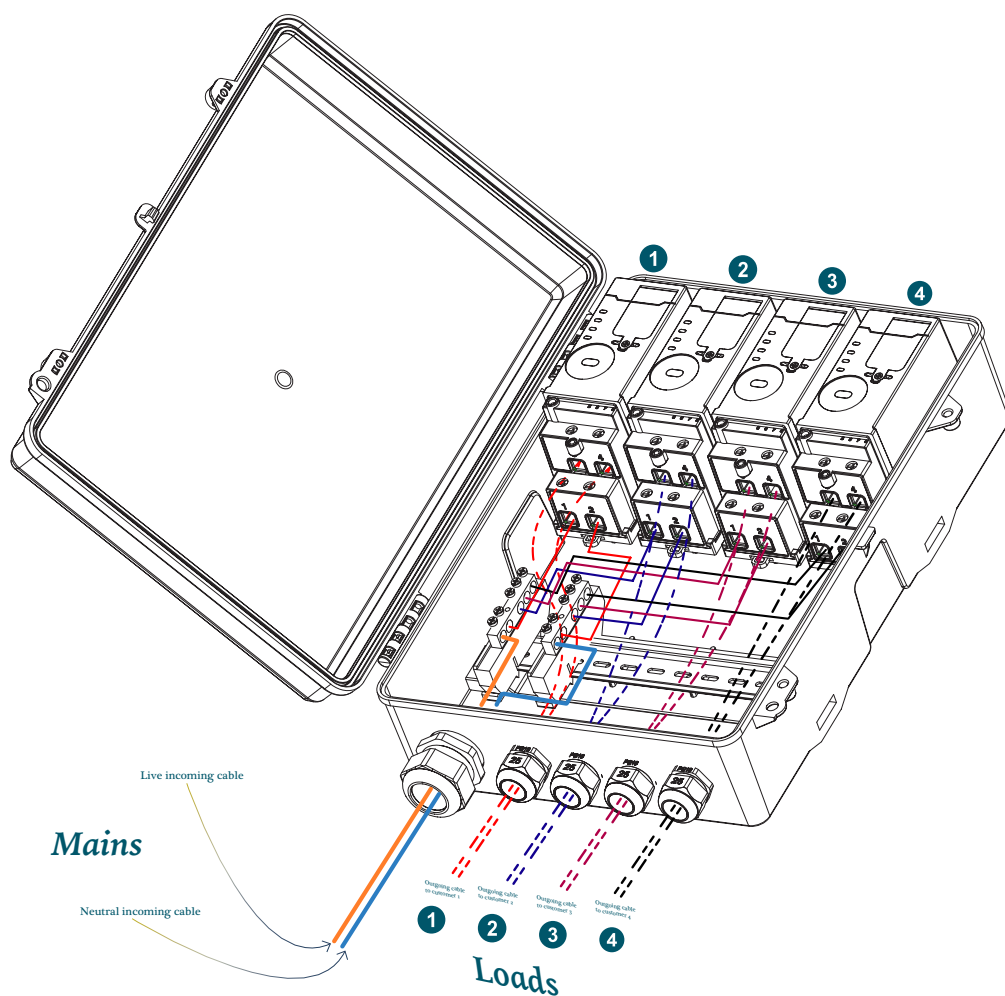

1

FEATURE 1 COMMUNICATION STRUCTURE

Each composite box is fitted with a communication modem as GPRS/3G/4G to evacuate data stored on each customer module and push to the Master Station.

2

FEATURE 2 SMART PREPAID

The solution supports both prepayment and credit mode metering, for different implementation of the utility/client as per local regulation of authority.

3

FEATURE 3 HIGH PROTECTIVE GRADE

The whole box is enclosed in a specifically designed weather proof box suitable for installation on a distribution box. Minimum of IP55 casing for outdoor installation.

4

FEATURE 4 AMI ENABLING

Meter Status (Online/Offline)
Load Profile Report in 15/30Minutes Cycle
Consumption Report (Daily, Weekly, Monthly) with a range button to select days or month as desired.

>> Meter View

**Feature**

The single phase din rail meter is a compact design smart meter for modular installation. It is installed on standard 35mm Din Rail and built with remote communication modules such as GPRS or Hybrid G3-PLC for remote data collection and control.



**Switchable**

The din rail meter can work as prepayment meter or postpayment meter with a single switching with standard STS token.

**Measurement**

The din rail meter is installed upstream of the customer premises from the direction of energy flow. The measurement meter and routing meter register the energy consumption independently and record data independently on their own inbuilt memory.

DESCRIPTIONS	SPECIFICATION
Reference voltage (Un)	230V
Operation voltage	70% Un~120% Un
Limit voltage	0% Un~190% Un
Maximum switching voltage	>240V AC
Maximum withstand voltage	500V, 48 hours, no damages or accuracy deviation after restoration
Short-time withstand voltage	600V, 1 minute, no damages or accuracy deviation after restoration
Base current (Ib)	5A
Maximum current (Imax)	60A
Maximum over current	100A for 30 minutes
Short-circuit current	3,000A, <3ms, no damage or accuracy deviation after restoration
Frequency	50Hz
Frequency range	47.5~52.5Hz
Accuracy class	Cl.1 for active energy, Cl.2 for reactive energy
Starting current	0.4%Ib (20mA)
Pulse constant	1000imp/kWh, 1000imp/kvarh
Protection class	IP55
Contactor mechanical life	>3000 cycles @ Maximum power, PF=1
Dimension	150x90x60mm
Weight	0.577kg
Connection Type	Din Rail LLNN
CONSUMPTION	SPECIFICATION
Voltage circuit consumption	<1.5W, 8VA @ 230V
Current circuit consumption	<0.2VA @ Base Reference Current (Ib)
ENVIRONMENT	SPECIFICATION
Operating temperature	-25°C~75°C
Storage temperature	-40°C~90°C
Humidity	Average <=95%, maximum <=100%, non-condensing
Altitude	0~3000m
EMC	SPECIFICATION
Electrostatic discharge (ESD)	Contact discharge: 8kV Air discharge: 15kV
Fast transient burst	4 kV/100 kHz
Surge immunity	10kA/kV
INSULATION	SPECIFICATION
Impulse voltage (1.2/50μs to IEC 62052-11)	Contact to Contact: > 4kV, Coil to contact: > 8kV
AC voltage	Contact to contact: 2kV , Coil to Contact: 4kV (4kV, 1min, 50Hz)

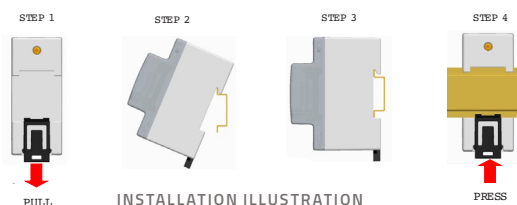

DS1800 Characteristics

2.1.1 CONFIGURATION

The DS1800 meter is a product family consisting of a broad range of smart energy meters, primarily used for BS mounting in a closed environment. The meter exists in 2 basic types, one "integrate type" which is aimed to work in standard smart metering and one "split type" aimed to work with a Customer Interface Unit (CIU) which is connected to the meter via PLC/RF or physical wire.

2.1.2 MEASUREMENT

All DS1800 meters are type approved according to international electricity meter IEC standards. All meter types are approved according to IEC 62052-11 which contains general requirements for electricity meters, IEC 62053-21 which contains particular requirements for active energy meters and IEC 62053-23 for reactive energy meters. Depending on functionality the meters can also be type approved to other standards.

The built in clock of the DS1800 meter is approved to IEC 62054-21 which contains particular requirements for time switches. These standards cover technical aspects regarding climatic conditions, electrical requirements, electromagnetic compatibility (EMC), accuracy and some mechanical requirements.

2.1.3 DISPLAY

The meter is equipped with an easy to read large liquid crystal display (LCD) which displays all defined data and information. With the use of its button or keypad, extensive data and information can be viewed.

2.1.4 REMOTE CONTROL

The DS1800 meter has a built in polarity independent solid state relay, an integral part for prepayment and smart metering. The relay can be disconnected/ reconnected automatically dependant on the meter credit register/tamper status or remotely from a control center.

2.1.5 COMMUNICATION

All DS1800 meters have an optical communication port on the front right side of the meter using IEC 62056-21 protocol. Optionally the meter can also be equipped with a 2-wire RS-485 port.

The DS1800 meter has also provided hot-swappable Comms modules, covering cellular (2G/3G/4G/NB-IoT), PLC (FSK), G3-PLC, G3 PLC/RF, RF (FSK), module to Wi-SUN protocol for remote communication.

It also gives different option to communicate to the CIU at ordering.

2.1.6 SECURITY

Serialized security seals are provided in combination with plastic seals. The meter is completely sealed to prevent tampering. Tamper can be detected even if the power is disconnected. The user interface includes a hotkey to display the number of tamper conditions detected.

DS1800 has an internal register of correctly entered meter-specific tokens to prevent re-entering of the tokens. Each meter has a unique meter security key. The terminal cover has a tamper detection function. The meter can be put into operation during installation.

2.1.7 RELIABILITY

Conformally coated PCBs, guarantee protection against the penetration of insects, dust and moisture.

The CIU has proven the reliability of more than one million operations per key.

SMT technology using surface-mounted components ensures a high degree of manufacturing accuracy, repeatability and reliability. Meter accuracy is maintained over the life of the meter.

2.1.8 PROTECTION

The DS1800 meter is protected by a lightning arrester. The electronic circuits are designed to withstand 420VAC for up to 48 hours. The meter is equipped with thermal protection on the terminals, improving product safety and the life cycle of the meter. The product is designed to suspend the power supply under power and current overload conditions with a 3.0 kA short-term over current protection and thermal protection.

2.1.9 ANTI-TAMPERING

The DS1800 meter has a wide range of ANTI tamper features, any attempt to tamper with the meter may result in the disconnection of power to the consumer, if configured. The power supply is only reconnected when an STS Clear Tamper Token (CTT) is entered into the meter. The STS tamper token is specific to the meter.

The key meter data and configuration are kept in the NVM of the meter for 20 years without power supply.



CHAPTER 1.2

SOLUTION THREE PHASE

BS SMART TYPE



SMART BS TYPE METER SOLUTION



Donsun Smart BS type smart energy meter is the second generation of Donsun Smart meter. It features exchangeable communication module and battery, highly reliable and robust. It can operate as a stand-alone or as part of a comprehensive AMI metering system via a variety of communication modules. Batteries for Clock & Calendar back up can be replaceable to extend the service life of the meter, whereas the battery chamber is sealed to prevent unauthorized opening. The meter is available in a number of variants that measure active energy, four quadrant reactive energy and kVA. It complies to international IEC standards as well as national standards as NERC, GSA, KTRC and more. It accommodates both standard STS prepayment and postpayment configuration, with variety of measurement data of active, reactive in multiple tariffs. Its data is secured according to the latest DLMS protocol. It offers various communication options with the CIU, from PLC, wire to RF, to accommodate different installation location challenges. The communication module is exchangeable based on the need of the customer. The compact design of the new smart meter helps to reduce cost of the meter for an affordable AMI implementation.

SOPHISTICATED REVENUE PROTECTION



With enhanced anti-tampering and no access to the check meters, Donsun Smart

BS type meter offers sophisticated revenue protection to customer in scenarios as:

- » Loss due to tamper on wirings;
- » Loss due to by-pass for unmetered customers;
- » Technical loss;

DONSUN SMART BS METER SOLUTION AIMS



Not just the meters, but we also provide full smart metering solutions including vending and

data reading APP, HES and other systems. It aims to improve the revenue of the customer in the following aspects:

- » Help reduce energy theft;
- » Full control and visibility of energy flow from entry point to the final consumer;
- » Independently verify or determine the actual energy/consumption of customers;
- » Determination of actual consumption of all customers including metered, unmetered customer or illegally connected customers;
- » Immediately identify and flag meters that lack integrity;
- » Affordable prices

>> Technical Data *

DESCRIPTIONS	SPECIFICATION
Reference voltage (Un)	3x230/400V
Operation voltage	70% Un~120% Un
Limit voltage	0% Un~190% Un
Maximum switching voltage	>240V AC
Maximum withstand voltage	500V, 48 hours, no damages or accuracy deviation after restoration
Short-time withstand voltage	600V, 1 minute, no damages or accuracy deviation after restoration
Base current (Ib)	5A
Maximum current (Imax)	100A
Maximum over current	120A for 30 minutes
Short-circuit current	3,000A, <3ms, no damage or accuracy deviation after restoration
Frequency	50Hz
Frequency range	47.5~52.5Hz
Accuracy class	Cl.1 for active energy, Cl.2 for reactive energy
Starting current	0.4%Ib (20mA)
Pulse constant	1000imp/kWh, 1000imp/kvarh
Protection class	IP55
Contactor mechanical life	>3000 cycles @ Maximum power, PF=1
Dimension	217x175x72.5mm
Weight	1.24kg
Connection Type	L ₁ L ₂ L ₃ L ₃ NN
CONSUMPTION	SPECIFICATION
Voltage circuit consumption	<1.5W, 8VA @ 230V
Current circuit consumption	<0.2VA @ Base Reference Current (Ib)
ENVIRONMENT	SPECIFICATION
Operating temperature	-25°C~75°C
Storage temperature	-40°C~90°C
Humidity	Average <=95%, maximum <=100%, non-condensing
Altitude	0~3000m
EMC	SPECIFICATION
Electrostatic discharge (ESD)	Contact discharge: 8kV Air discharge: 15kV
Fast transient burst	4 kV/100 kHz
Surge immunity	10kA/kV
INSULATION	SPECIFICATION
Impulse voltage (1.2/50μS to IEC 62052-11)	Contact to Contact: > 4kV, Coil to contact: > 8kV
AC voltage	Contact to contact: 2kV , Coil to Contact: 4kV (4kV, 1min, 50Hz)



The meters offer a variety of configuration. Full meter configuration please refer to the Donsun meter configuration file.



Cellular 2G/3G/4G

Powered by the meter, Transparent or Pull/Push operation
Internal or External antenna, Simultaneous communication



G3-PLC

Support a secondary communication module as cellular, radio frequency,
NB-IoT, M-Bus, etc if embedded



Radio Frequency/LoRa

Support of IPv4 and IPv6 Wide-Area-Network (WAN) or Mesh
Detachable or Embedded on board, FOTA firmware upgrade



NB-IoT

Minimum power consumption Extended coverage
Dedicated Smart scalable technology, Simultaneous communication



Local Serial Port

RS-485 and other local communication for manual data retrieval
Local configuration of meter parameters conforms to DLMS/COSEM

DATA CONCENTRATOR UNIT DSC100



DSC100 collects, processes, and reports data in compliance to DLMS from our smart energy meters or from other manufacturers who complied to DLMS and system monitoring applications. Smart metering data from a variety of meters are time-aligned, structured, and transmitted to upstream devices, which can be similar DCU to smart meter, visualization devices, external historians, or external applications.

+ UPLINK COMMUNICATION
GPRS, 3G, 4G

+ DOWNLINK COMMUNICATION
RF, PLC, HYBRID

+ PROTOCOL
DLMS/COSEM

+ DIMENSION
290*180*95MM

+ WEIGHT
1.95KG

F U L L V A R I E T Y — DSC100 can accommodate RS485, RF and PLC communication module for downlink to meters and GPRS/3G/4G modules for uplink to HES. DSC100 is a DLMS and DL/T 698 complaint DCU. This DSC100 system can communicate with DLMS or DL/T 698 standard compliant metering devices.

Optical Port	The optical port is used to read DCU and configure the DCU parameter or control the DCU locally. In general, PC software is used to communicate with DCU via this optical port.
WAN	The DCU has one replaceable GPRS module as the main WAN communication interface, and has an Ethernet communication interface as a backup WAN communication interface.
Ethernet	DCU supports one Ethernet port which can also be used for remote communication.
LAN	DCU supports three LAN communication interfaces: 1) An RF communication interface (exchangeable with PLC) 2) A PLC communication interface (exchangeable with RF) 3) An RS-485 communication interface
RF	RF communication is based on DLMS/COSEM HDLC profile. The key features of RF are listed below: ▪ Communication frequency: 915.25M , 915.85M, 916.60M, 917.10M, 917.75M ▪ Auto-repeater, network self-healing ▪ Meter auto-registration ▪ Up to three repeating levels
RS-485	DCU has one RS-485 communication port, which can be used to connect to RS-485 meters. The interface supports DLMS/COSEM HDLC profile.

F U L L A V A I L A B I L I T Y

P U R P O S E T A R G E T E D — DSC100 collects, processes, and reports data in compliance to DLMS from our smart energy meters or from other manufacturers who complied to DLMS and system monitoring applications. Smart metering data from a variety of meters are time-aligned, structured, and transmitted to upstream devices, which can be similar DCU to smart meter, visualization devices, external historians, or external applications.

CUSTOMER INTERFACE UNIT DSD100




COMPLETE COVERAGE — DSD100 is compatible with all prepayment energy meters of DONSUN, providing different communications with the meter over Radio Frequency, PLC (FSK/OFDM), wire cable or other defined method by the Utility. It is automatically connected to the meter after the matching code is input via its built-in keypad.

+ DIMENSION
82X144X40 MM

+ WEIGHT
0.18 KG


+ COMMUNICATION TO METER
PLC, RF, M-BUS

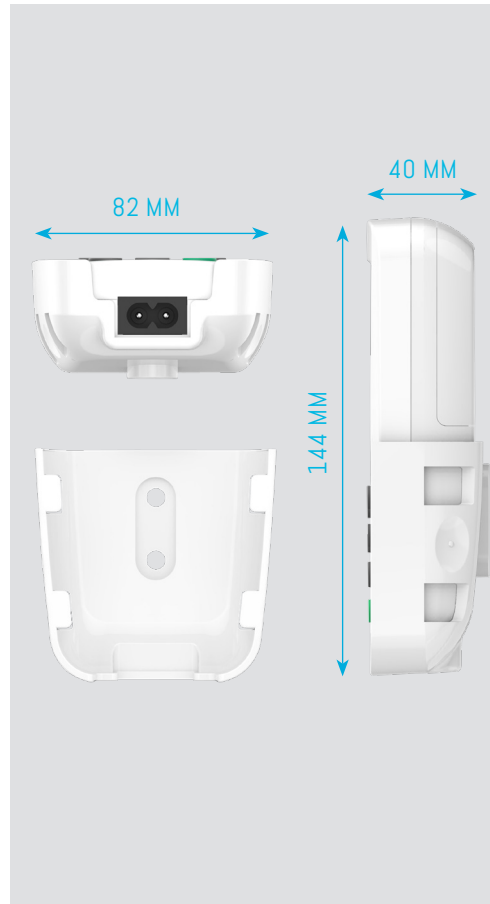

DSD100 provides various options of alarm and alert to the customer relating to meter status and consumption. The 3 LED indicators on its front panel gives intuitive information to the customer to keep aware of the consumption level, balance credit, meter tamper and power outage, whilst it also can make active buzzer alarm when acute event occurs as low credit, over load or tampering.

DSD100 is provided with installation bracket to facilitate the daily operation of the customer. It shall be installed with power outlet and away from fire and moisture, while it shall be kept safe distance from the children. A numeric keypad which fits human figure that ergonomically designed for easy input of the use for the customer. A large size LCD can be configured by the customer to display characters or OBIS.

>> Meter Box

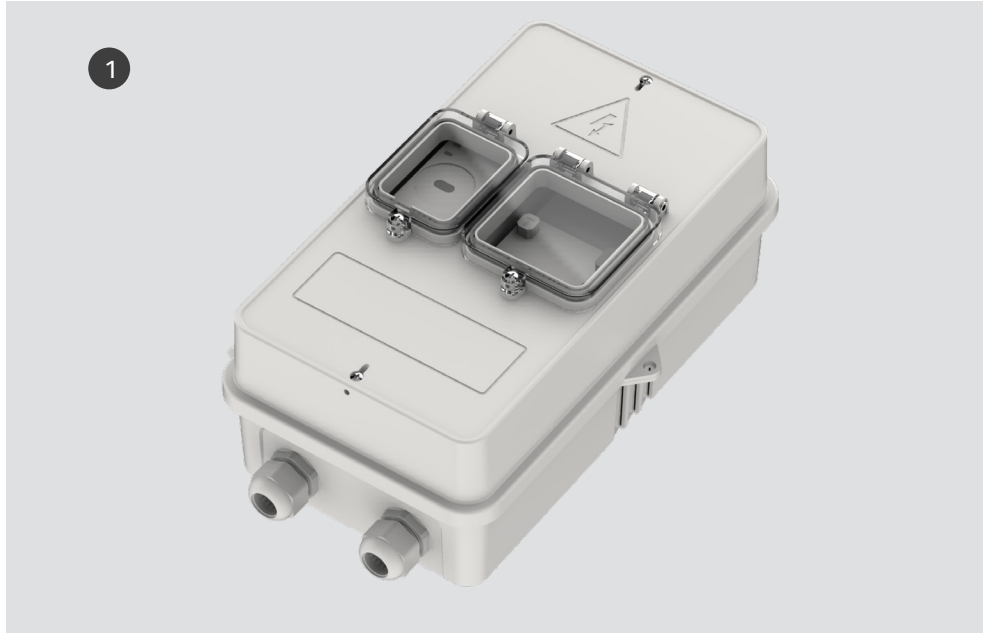MULTIFUNCTIONAL SINGLE PHASE
METER BOX

+ DIMENSION
293MM×192MM×122MM


+ WEIGHT
0.43 KG

❶ DSP101 SINGLE POSITION
MULTIFUNCTIONAL METER BOX

F E A T U R E S — DSP101 single phase meter boxes are multi-functional meter box models for single-phase energy meter. It has provision for both hose clamp pole mounting and wall mounting options. The meter box can accommodate one unit of DIN-RAIL type of single-phase energy meters. It has high protection degree for outdoor mounting and security sealing provision. Independent transparent window for meter reading and breaker operation, both with sealing provision. Differential circuit breaker can also be accommodated in some variants.

MULTIFUNCTIONAL SINGLE PHASE METER BOX

2

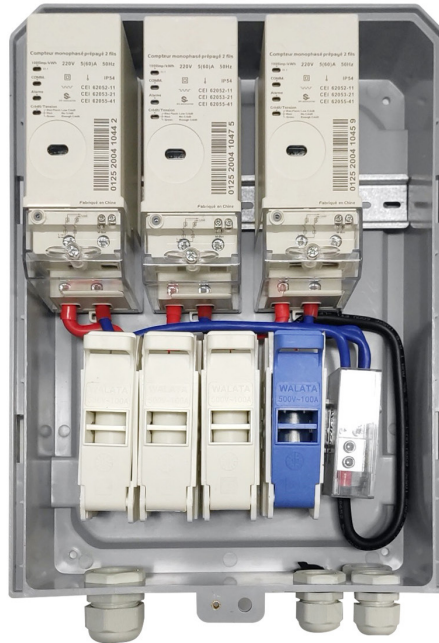

+ DIMENSION
L380*W175*H106 MM

+ WEIGHT
1.68 KG

① DSP304 FOUR POSITION
MULTIFUNCTIONAL METER BOX

F E A T U R E S — DSP304 single phase meter boxes are multi-functional meter box models for single-phase energy meter. It has provision for both hose clamp pole mounting and wall mounting options. The meter box can accommodate maximum four units of DIN-RAIL type of single-phase energy meters.

It has high protection degree for outdoor mounting and security sealing provision. Independent transparent window for meter reading and breaker operation, both with sealing provision. Differential circuit breaker can also be accommodated in some variants.

>> Meter Box

MULTIFUNCTIONAL THREE PHASE
METER BOX

Donsun three phase meter box series are specially designed for the purpose of anti-tamper and protection of meter. Maximum 1(One) three phase meters or 4(Four) pcs DIN rail meters can be mounted with bottom connection. The enclosure with two separated transparent windows, transparent top cover and non-transparent base. The material of enclosure is polycarbonate with UV assistance and VO frame resistance degree. Pole mounted or Wall mounted or lock and key protection are based on project demand. Alarm sensor for enclosure opening is also provided an option.

+ DIMENSION

L473.85*W259.29*H140.5MM

+ WEIGHT

1.35 KG

PLUS FEATURES — Depending on the requirements of material, ABS, PC and polyester with grass can be used for different markets. In addition, the series can accommodate different type of MCB or differential breaker and/or fuse holders. The three phase meter box serials is provided with installation accessories for wall mounting or pole installation as per the request of customer.

**3 DSP301 SINGLE POSITION
METER ENCLOSURE DOUBLE WINDOWS**

Cost Breakdown for Smart Meters and Accessories

PRODUCT CODE	PHASE	AMPERAGE	PRICE	MOQ
DS1800 Din Rail Prepayment Energy Meter Reserved RF Comms to CIU, CIU not provided, GPRS Comms to AMI	1	5(60)A	\$ 28.55	500
DS1800 Din Rail Prepayment Energy Meter Reserved RF Comms to CIU, CIU not provided, Hybrid G3 Comms to DCU	1	5(60)A	\$ 29.75	500
DS3600 Three Phase Smart Prepayment Energy Meter Reserved PLC Comms to CIU, CIU not provided, GPRS Comms to AMI	3	5(100)A	\$ 54.18	100
DS3600 Three Phase Smart Prepayment Energy Meter Reserved PLC Comms to CIU, CIU not provided, Hybrid G3 Comms to DCU	3	5(100)A	\$55.73	100
CIU with PLC Communication to Meter	1	N/A	\$15.07	100
CIU with RF Communication to Meter	1	N/A	\$12.69	100
G3-PLC Modem for DCU	3	N/A	\$ 42.83	2
GPRS Modem for DCU	3	N/A	\$ 42.69	2
DSC100 Data Concentrator Unit (DCU)	3	N/A	\$ 263.31	2
DSP101 Single Phase Meter Box for 1 Din Rail Meter	N/A	N/A	\$ 10.47	100
DSP304 Single Phase Meter Box for 4 Din Rail Meter	N/A	N/A	\$ 28.47	100
DSP301 Three Phase Meter Box for Meter or DCU	N/A	N/A	\$ 17.76	100

1. SHIPMENT TERMS: EXW SHENZHEN
2. VALIDITY: 180 DAYS FROM DATE OF ISSUE
3. OTHER TECHNICAL OPTIONS ARE AVAILABLE UPON REQUEST
4. INDICATIVE PRICE, FORMAL PI AVAILABLE UPON REQUEST

>> Terms



PAYMENT

We invoice for the delivered Products thereof upon PO and prior to delivery. Remittance of invoices from us to customer shall occur within 48 hours of any quarterly shipped Products. Payment of each invoiced amount is due within 5 working days of the invoice date by us, unless otherwise mutually agreed in writing by both parties. During the term hereof, we may, upon 60 days prior written notice, change the payment terms. The customer agrees to provide all documents and such other information as is reasonably required in connection with obtaining such insurance.



SUPPORT AND WARRANTY

We warrant all provide products against defects in material and workmanship. Under normal use and service, every hardware portion of the products will be free from physical defects in material and workmanship during the warranty period, or the product will be repaired or replaced as determined by us. For each consignment, we provide an extra 0.3% quantity as spare parts for the local production damage. We provide a standard 18 months warranty for our product only to the person or entity that originally purchased the product from us. We will not be liable in any way for the loss of data on any computer or storage device and any damage caused by this.



COPYRIGHTS AND USER MANAGEMENT

The COPYRIGHTS of this document is reserved by DONSUN perpetually. It is strictly forbidden to reveal this document with any other third party.

This document only for your personal and evaluation use, and it is not for commercial exploitation (for example, by resale to others or by republication to the public). Further, you may not decompile, reverse engineer, disassemble, rent, lease, loan, sell, sublicense, or create derivative works from this document.



INTELLECTUAL PROPERTY RIGHTS

All documents provided by us are the intellectual property of DONSUN. We reserve the right to refuse to grant permission and/or provide reproductions to anyone who has no written consent from us.

Failure to meet these Terms and Conditions will result in forfeiture of the right to use our documents for any purposes, unless the conditions are formally waived or altered, in writing, by an authorized representative of us. We reserve the right, at its sole discretion, to deny permission to any applicant without explanation.



SHENZHEN DONSUN TECHNOLOGY CO., LTD.



ADDRESS

10H, 11 BLG, Software
Park II, Nanshan, Shenzhen,
518057 P.R. China



CONTACT

+ 86 755 86565087
sd@donsuntech.com
info@donsuntech.com
www.donsuntech.com

