



CAT 6 FLASHER 12 V DROP TEST REPORT

DATE:25.05.2026

PAGE NO.: 1/3

Part Name	CAT 6 FLASHER 12 V	Application	COMMERCIAL APPLICATION
Customer Part No.	B00 861 544 00 32	Customer	FORCE MOTOR
UCAL Part No.	400230122002	Report No	R&D/CAT6/12VF/DUR/26/038

INTRODUCTION:

UCAL is currently supplying 12V CAT 6 Flashers to Force Motor for commercial applications. This validation plan has been prepared to define the test requirements and validation activities for the current production parts of the respective product. The testing will be carried out as per the approved validation plan to verify product performance, functional reliability, and compliance with specified requirements under defined test conditions.

PURPOSE:

To evaluate the 12 V CAT 6 flashers assembly after **Drop test**.

TEST SPECIFICATION:

The Drop Test shall be carried out under the following test conditions:
The sample shall be tested in non-operating condition without any electrical connection. The unit shall be allowed to fall freely under gravity without applying any external force. One drop on each face of the sample (Total 6 Faces). The unit (AL Flasher 12V) shall be placed in its normal mounting/use position and lifted to a height of 1 Meter $\pm$ 10 mm from the test surface. The sample shall then be released to fall freely onto the rigid MS plate surface. After completion of one drop, the unit shall be rotated sequentially so that each adjoining face rests on the test surface, and the dropping procedure shall be repeated until all six faces have been subjected to one free-fall impact.

ACCEPTANCE CRITERIA:

After completion of the Drop Test, the sample shall not exhibit any physical damage such as crack, deformation, loosening of parts, or functional abnormality. The product shall meet all specified functional and performance requirements after testing.

RESULT:

SAMPLE NO	PERFORMANCE	APPEARANCE	JUDGEMENT
S:03	O	O	O
S:04	O	O	O

O: OK

X: NG

Δ: To be confirmed

CONCLUSION:


The performance of the Flasher assembly is acceptable after test. The samples are met the requirements.

 Mr. Rahul Bongarde	 Mr. Karthikeyan N
Prepared By	Approved By

PERFROMACE TEST SPECIFICATIONS:

SNO	PARAMETERS	SPECIFICATIONS
1	Operating voltage	10~16 V
2	Test voltage	13.5V
3	Flash rate(Turn signal/Hazard warning)	60~120 Flashes/Minute
4	One lamp failure flashing rate	>140 Flashes/Min(or)1.8 times of flash rate whichever is greater
5	Duty Cycle	40% ~60%

TEST SETUP:

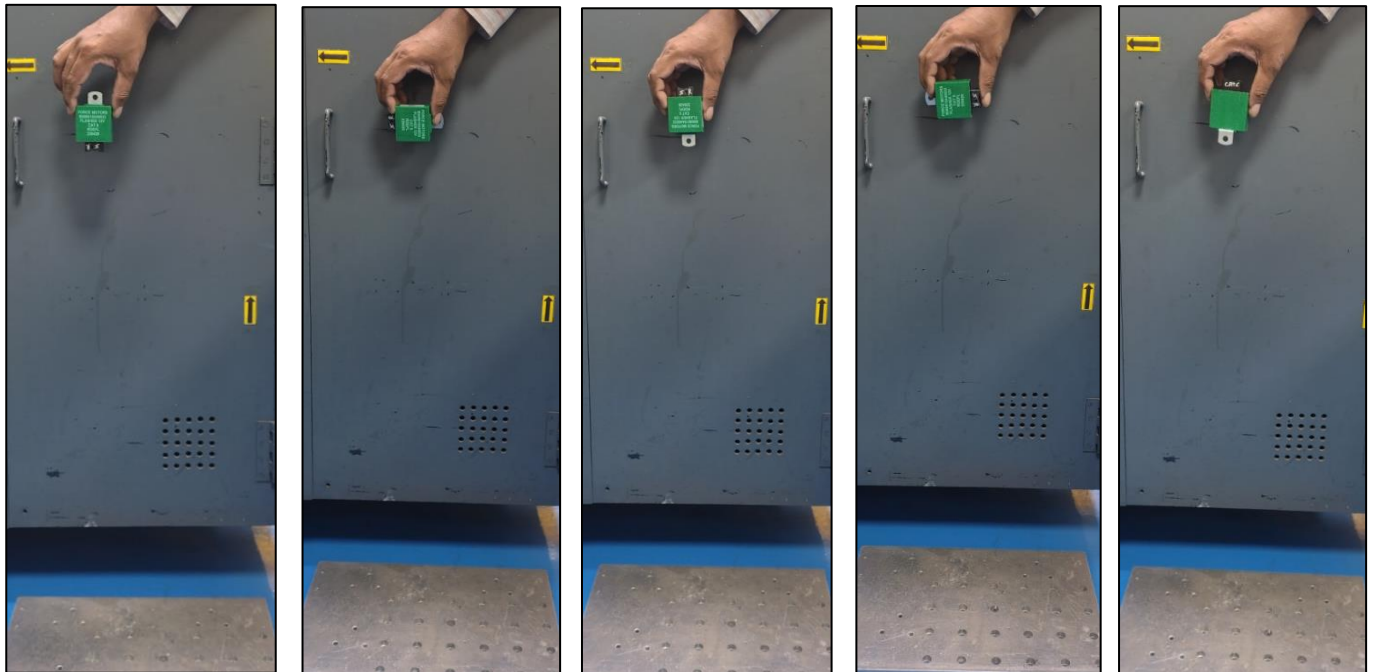

TURN SIGNALS & HAZARD SIGNALS:

LEFT SIGNAL	RIGHT SIGNAL	HAZARD SIGNAL
		



CAT 6 FLASHER 12 V DROP TEST REPORT

DATE:25.05.2026


PAGE NO.: 3/3

TEST OBSERVATION:

Description	Load	Observations(at 12 V)	Remark
	LED& CLUSTER	Sample No:03,04	
Turn Signal RH	3 x 21 W Lamp + 1x 2W LED	85	OK
Turn Signal LH	3 x 21 W Lamp + 1x 2W LED	85	OK
Hazard Mode	6 x 21 W Lamp + 2x 2 W LED+	85	OK
Fault condition Any one 21W Lamp failure	2 x 21 W Lamp + 1x 2 W LED	170	OK
Duty cycles for RH&LH	3 x 21 W Lamp + 1x 2 W LED	50%	OK
Duty cycles for Hazard Mode	6 x 21 W Lamp + 1x 2 W LED	51%	OK

NOTE: The observed flashes are within the specifications & the samples met the performance requirements.

WAVEFORM DATA:

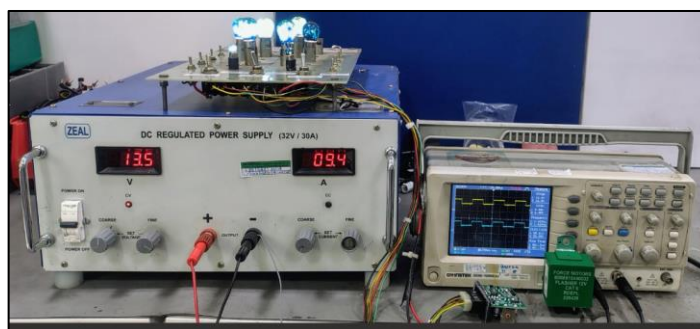

TESTED SAMPLES PHOTOS:

BEFORE TEST SAMPLE – S:03,04	AFTER TEST SAMPLE – S:03,04

OBSERVATION:

There is no significant change in the electrical performance of the flasher samples. The functionality remains satisfactory. The observed flashes are within the specified requirements & the samples met the performance requirements. All function of the Flasher performs as designed before & after the test.