

Computer Vision


Fitting and Alignment

Dr. Mrinmoy Ghorai

Indian Institute of Information Technology
Sri City, Chittoor



Fitting and Alignment

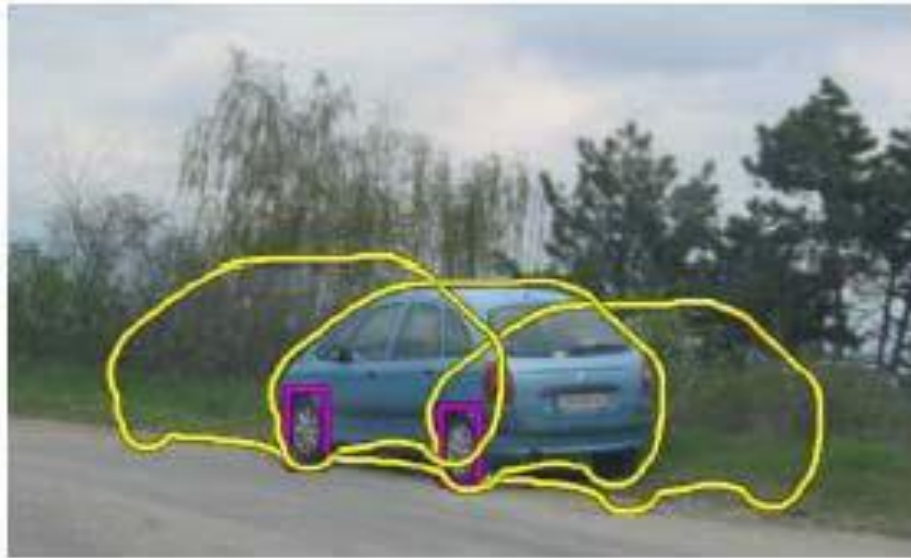


Fitting: find the parameters of a **model** that best fit the data

Alignment: find the parameters of the **transformation** that best align matched points

Fitting and alignment

- Choose a *parametric model* to represent a set of features

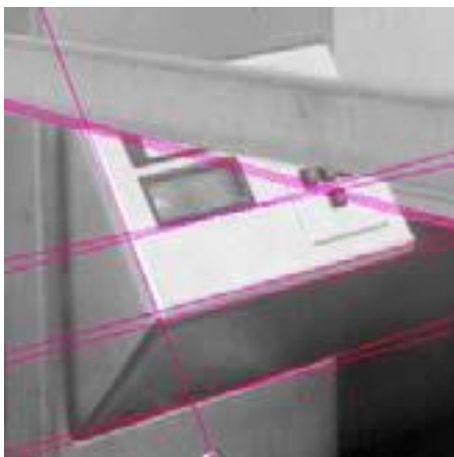

simple model: lines



simple model: circles



complicated model: car



complicated model: face shape

Fitting and Alignment: Methods


- Global optimization / Search for parameters
 - Least squares fit
 - Robust least squares
 - Iterative closest point (ICP)
- Hypothesize and test
 - Generalized Hough transform
 - RANSAC

Simple example: Fitting a line

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize


$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

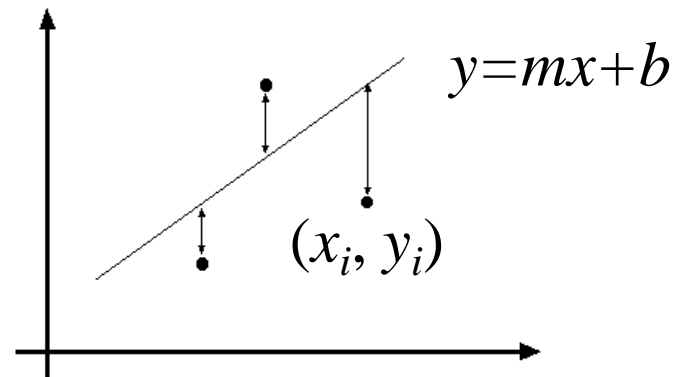

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize

$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

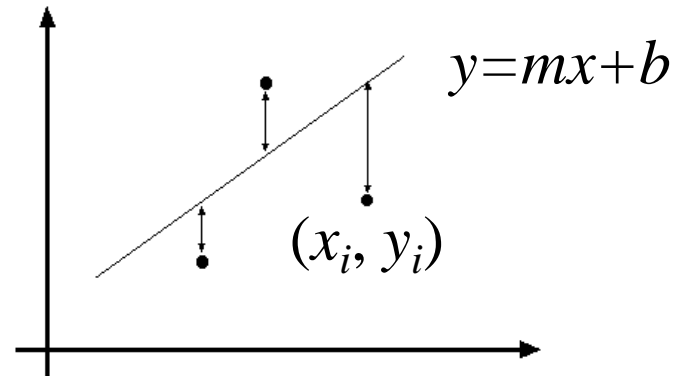


$$E = \sum_{i=1}^n \left(\begin{bmatrix} x_i & 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - y_i \right)^2$$

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize

$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

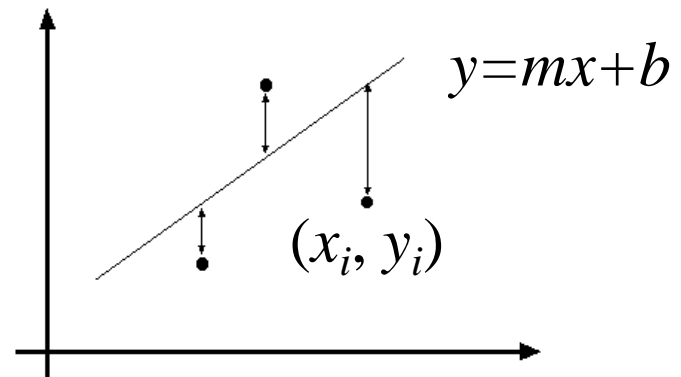


$$E = \sum_{i=1}^n \left(\begin{bmatrix} x_i & 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - y_i \right)^2 = \left\| \begin{bmatrix} x_1 \\ \vdots \\ x_n \\ 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - \begin{bmatrix} y_1 \\ \vdots \\ y_n \end{bmatrix} \right\|^2$$

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize

$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

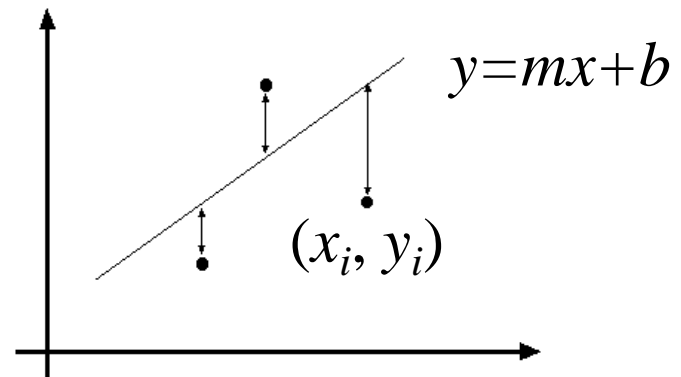


$$E = \sum_{i=1}^n \left(\begin{bmatrix} x_i & 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - y_i \right)^2 = \left\| \begin{bmatrix} x_1 \\ \vdots \\ x_n \\ 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - \begin{bmatrix} y_1 \\ \vdots \\ y_n \end{bmatrix} \right\|^2 = \|\mathbf{A}\mathbf{p} - \mathbf{y}\|^2$$

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize

$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

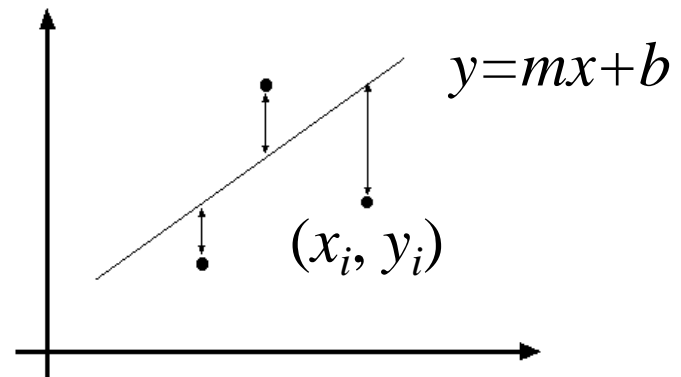


$$E = \sum_{i=1}^n \left(\begin{bmatrix} x_i & 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - y_i \right)^2 = \left\| \begin{bmatrix} x_1 \\ \vdots \\ x_n \\ 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - \begin{bmatrix} y_1 \\ \vdots \\ y_n \end{bmatrix} \right\|^2 = \|\mathbf{Ap} - \mathbf{y}\|^2$$
$$= \mathbf{y}^T \mathbf{y} - 2(\mathbf{Ap})^T \mathbf{y} + (\mathbf{Ap})^T (\mathbf{Ap})$$

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize

$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

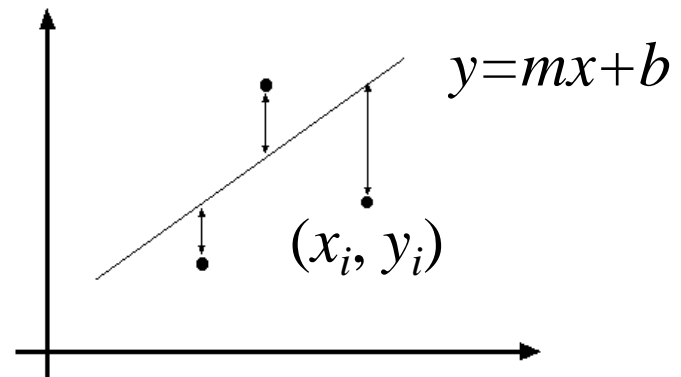

$$E = \sum_{i=1}^n \left(\begin{bmatrix} x_i & 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - y_i \right)^2 = \left\| \begin{bmatrix} x_1 \\ \vdots \\ x_n \\ 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - \begin{bmatrix} y_1 \\ \vdots \\ y_n \end{bmatrix} \right\|^2 = \|\mathbf{A}\mathbf{p} - \mathbf{y}\|^2$$


$$= \mathbf{y}^T \mathbf{y} - 2(\mathbf{A}\mathbf{p})^T \mathbf{y} + (\mathbf{A}\mathbf{p})^T (\mathbf{A}\mathbf{p})$$

$$\frac{dE}{dp} = 2\mathbf{A}^T \mathbf{A}\mathbf{p} - 2\mathbf{A}^T \mathbf{y} = 0$$

Least squares line fitting

- Data: $(x_1, y_1), \dots, (x_n, y_n)$
- Line equation: $y_i = mx_i + b$
- Find (m, b) to minimize

$$E = \sum_{i=1}^n (y_i - mx_i - b)^2$$

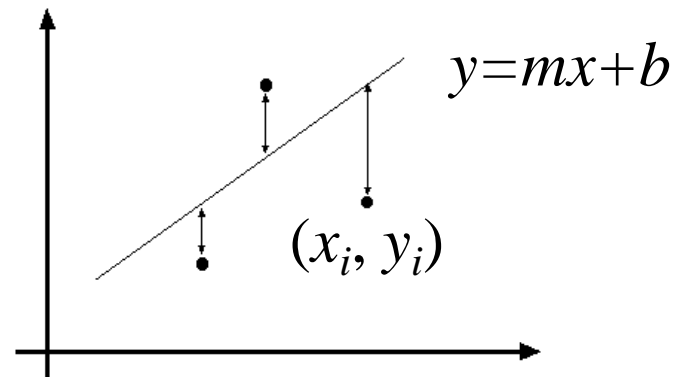

$$E = \sum_{i=1}^n \left(\begin{bmatrix} x_i & 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - y_i \right)^2 = \left\| \begin{bmatrix} x_1 \\ \vdots \\ x_n \\ 1 \end{bmatrix} \begin{bmatrix} m \\ b \end{bmatrix} - \begin{bmatrix} y_1 \\ \vdots \\ y_n \end{bmatrix} \right\|^2 = \|\mathbf{A}\mathbf{p} - \mathbf{y}\|^2$$

$$= \mathbf{y}^T \mathbf{y} - 2(\mathbf{A}\mathbf{p})^T \mathbf{y} + (\mathbf{A}\mathbf{p})^T (\mathbf{A}\mathbf{p})$$

$$\frac{dE}{dp} = 2\mathbf{A}^T \mathbf{A}\mathbf{p} - 2\mathbf{A}^T \mathbf{y} = 0$$

$$\mathbf{A}^T \mathbf{A}\mathbf{p} = \mathbf{A}^T \mathbf{y} \Rightarrow \mathbf{p} = (\mathbf{A}^T \mathbf{A})^{-1} \mathbf{A}^T \mathbf{y}$$

Hypothesize and test

- Hough Transform
 - RANSAC Algorithm
1. **Propose** parameters
 2. **Score** the given parameters
 3. **Choose from among** the set of parameters
 4. Possibly **refine** parameters using **inliers**


Hough Transform: Outline

1. Create a grid of parameter values
2. Each point votes for a set of parameters, incrementing those values in grid
3. Find maximum or local maxima in grid

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Given a set of points, find the curve or line that explains the data points best

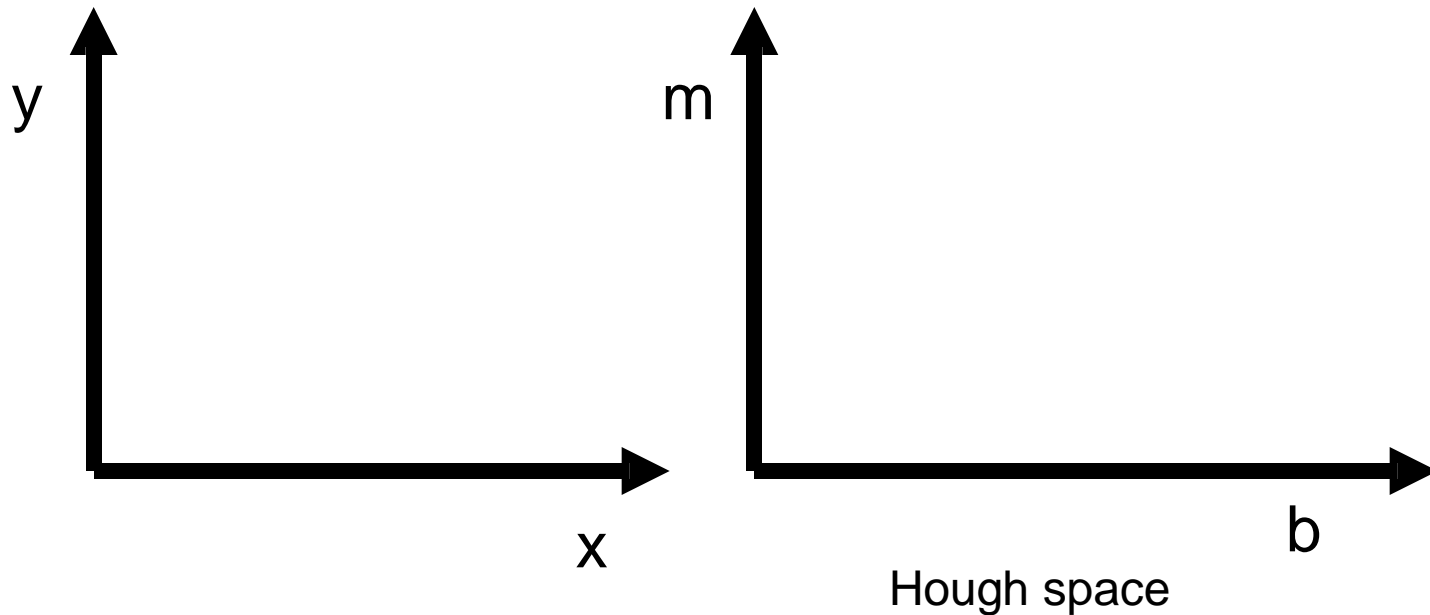


$$y = m x + b$$

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Given a set of points, find the curve or line that explains the data points best

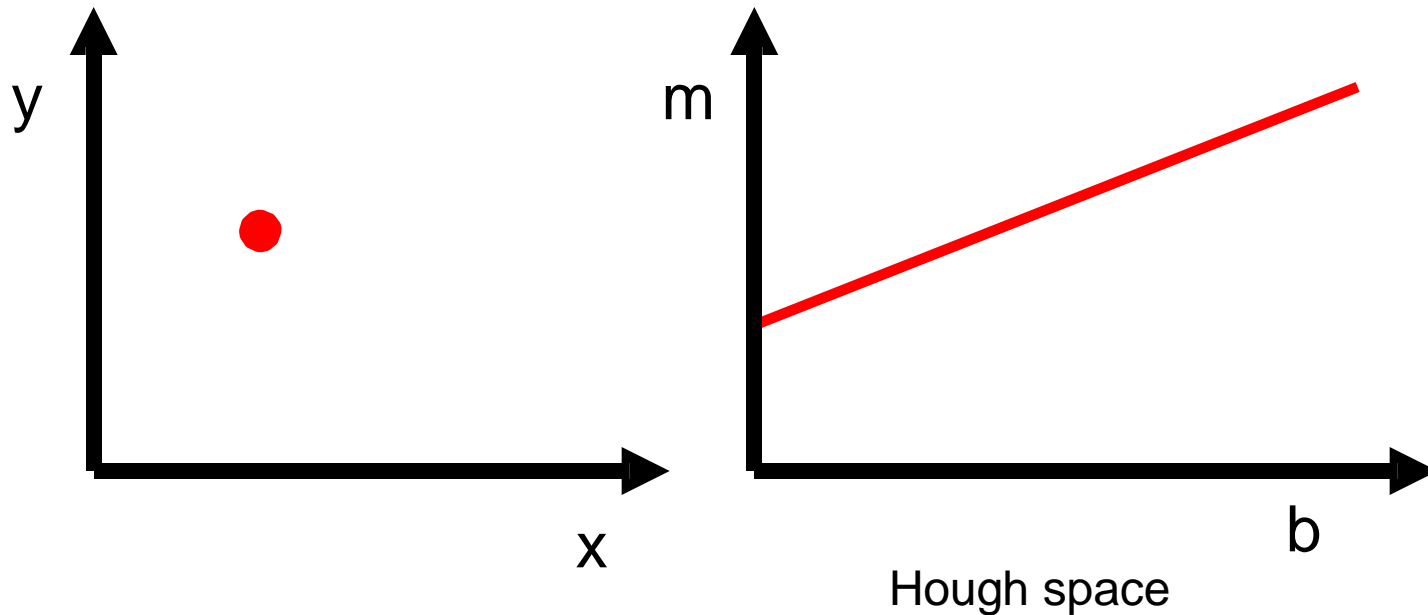


$$y = m x + b$$

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Given a set of points, find the curve or line that explains the data points best

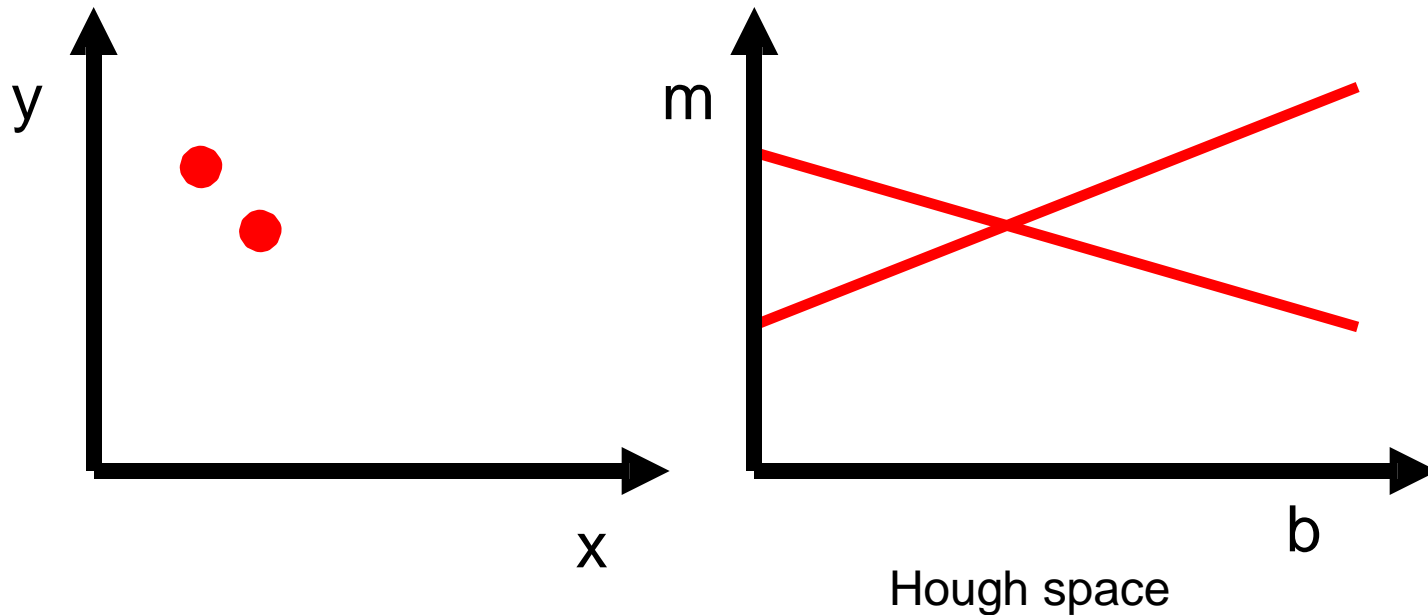


$$y = m x + b$$

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Given a set of points, find the curve or line that explains the data points best

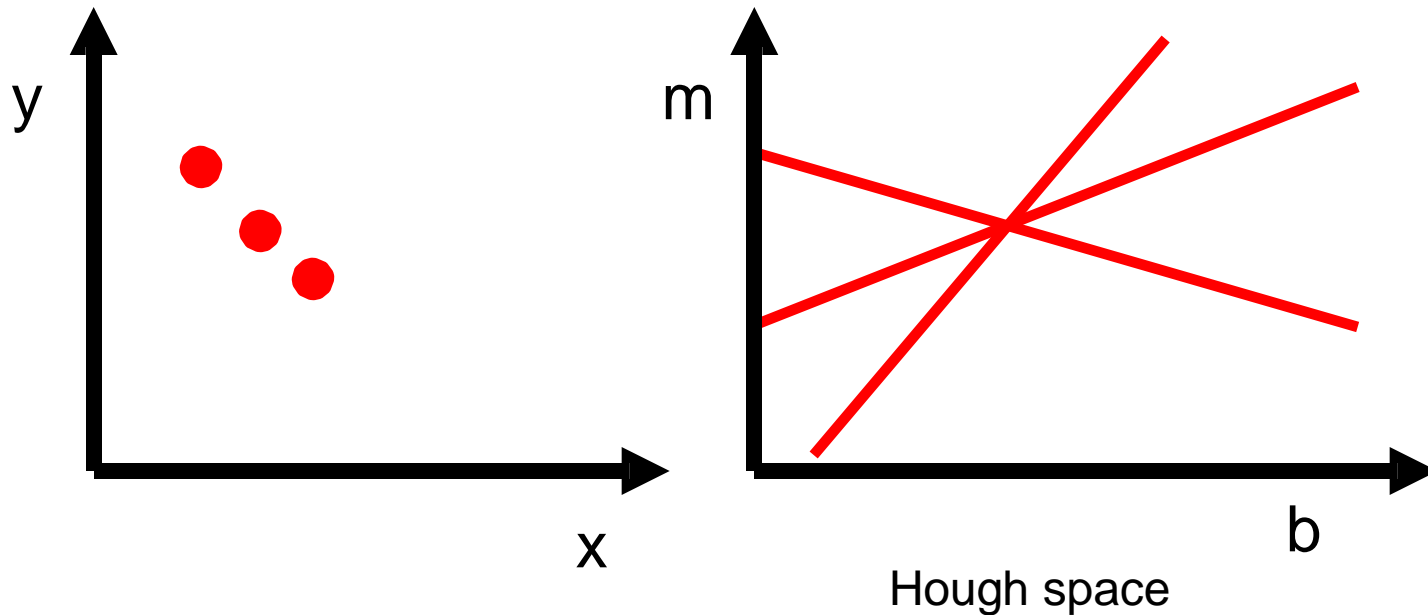


$$y = m x + b$$

Hough transform


P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Given a set of points, find the curve or line that explains the data points best




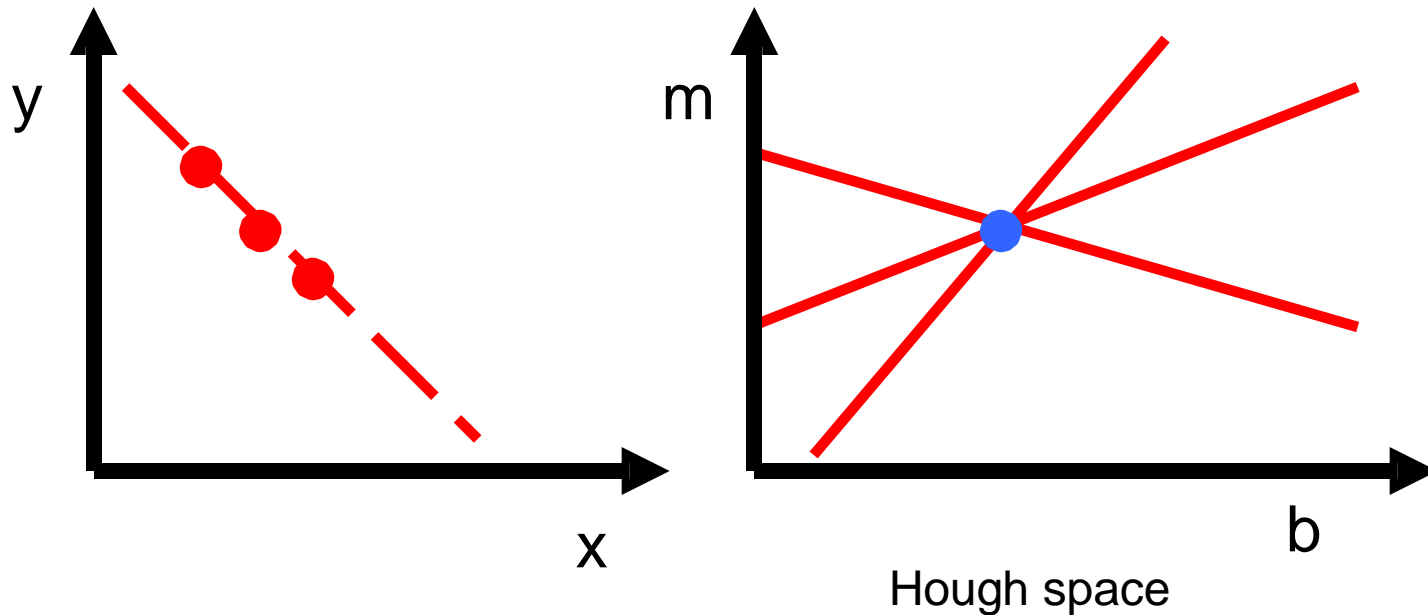


$$y = m x + b$$

Hough transform

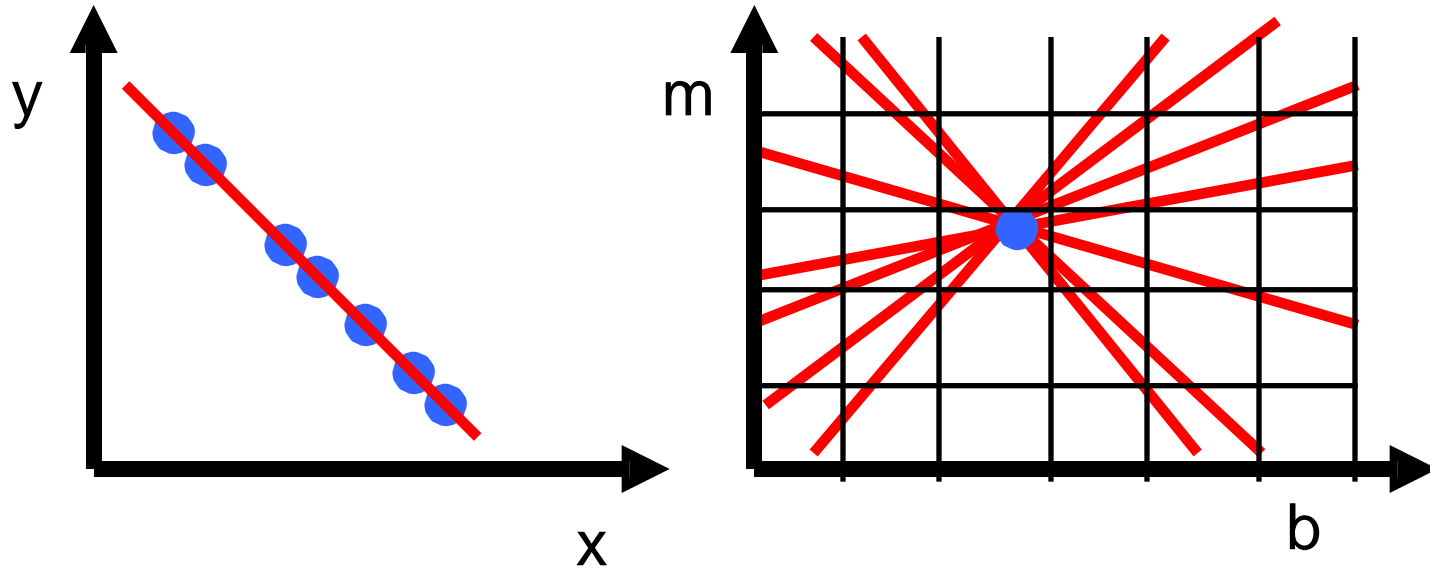

Hough transform

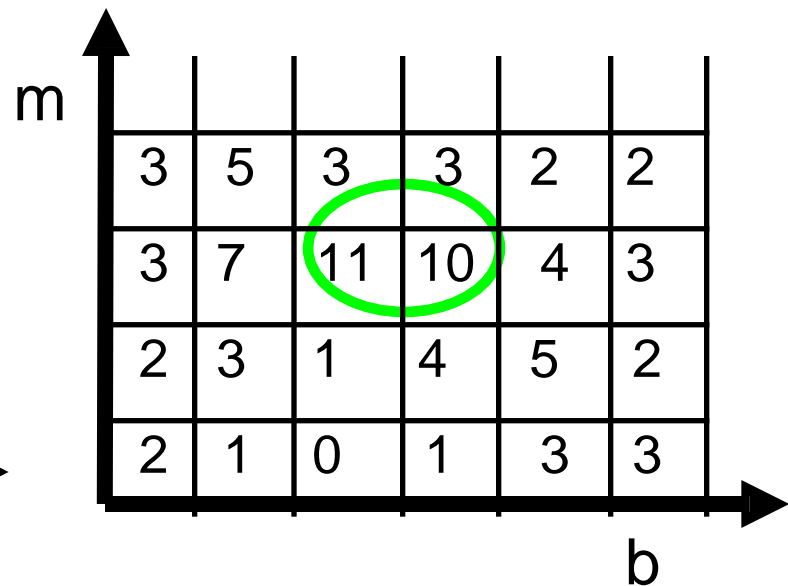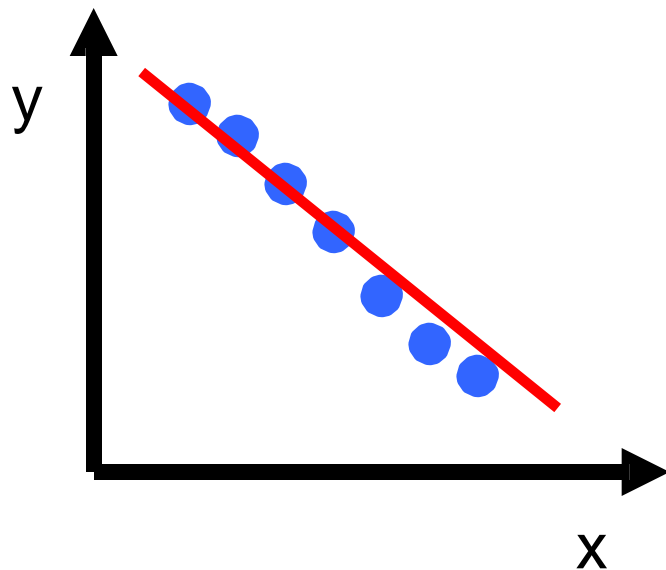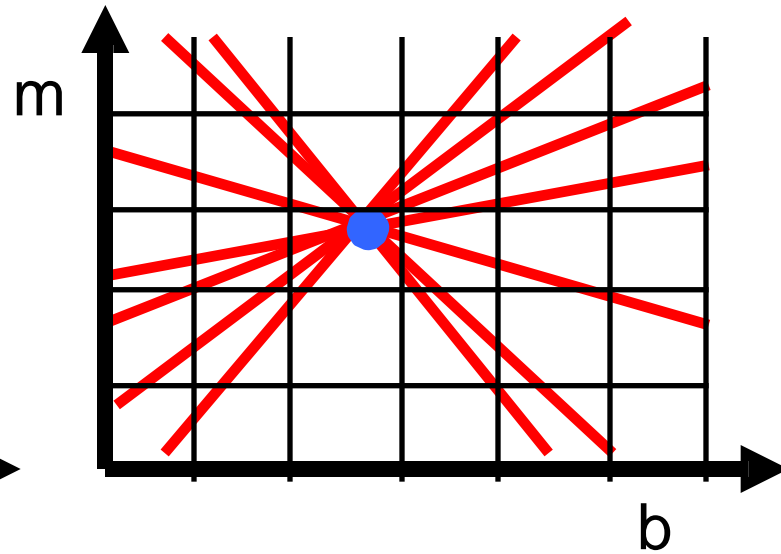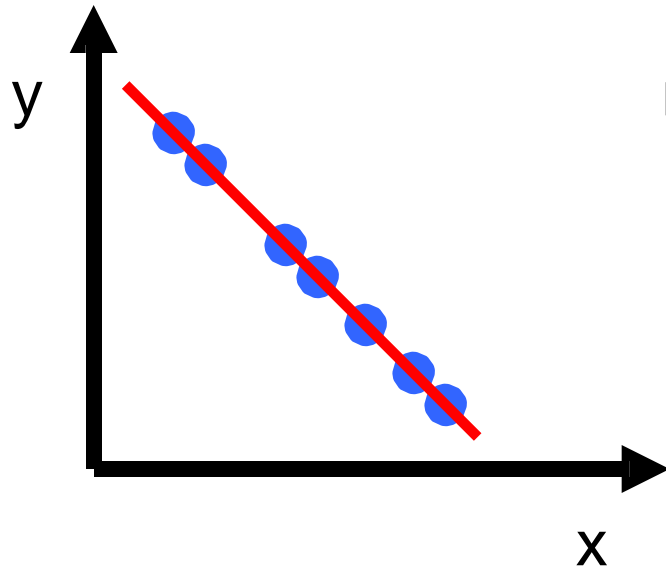


Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Issue : parameter space $[m,b]$ is unbounded...

Use a polar representation for the parameter space

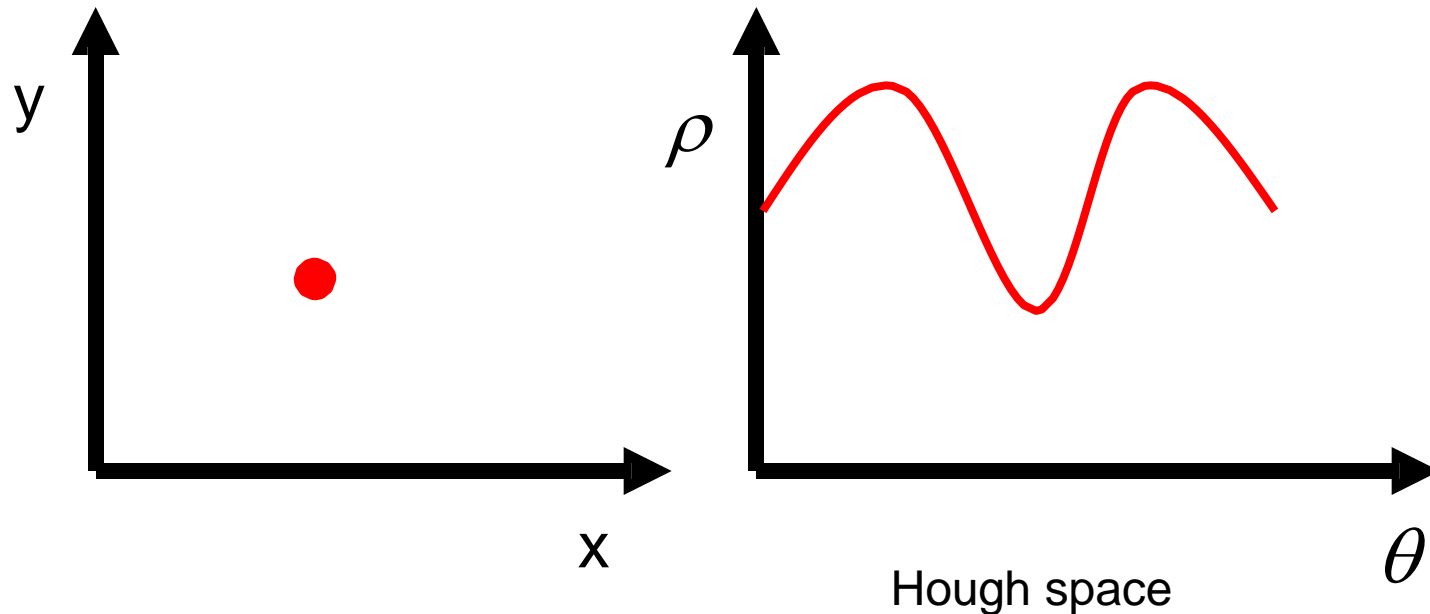


$$x \cos \theta + y \sin \theta = \rho$$

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Issue : parameter space $[m,b]$ is unbounded...

Use a polar representation for the parameter space

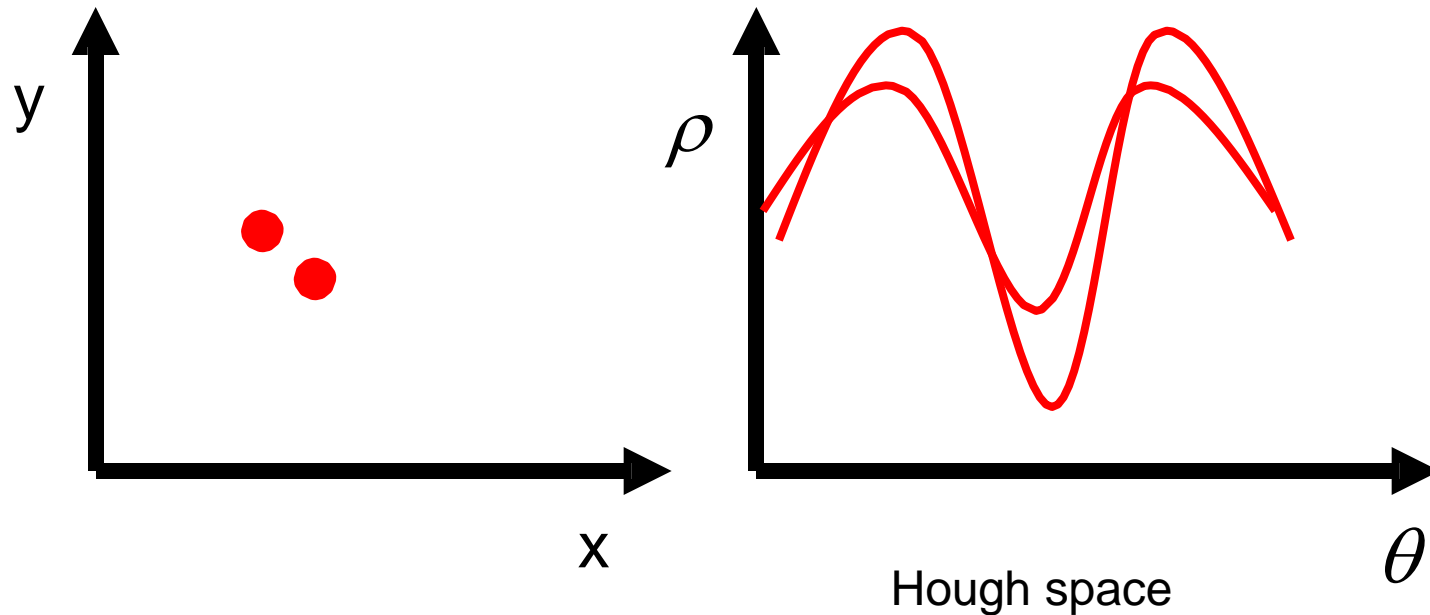


$$x \cos \theta + y \sin \theta = \rho$$

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959

Issue : parameter space $[m,b]$ is unbounded...

Use a polar representation for the parameter space

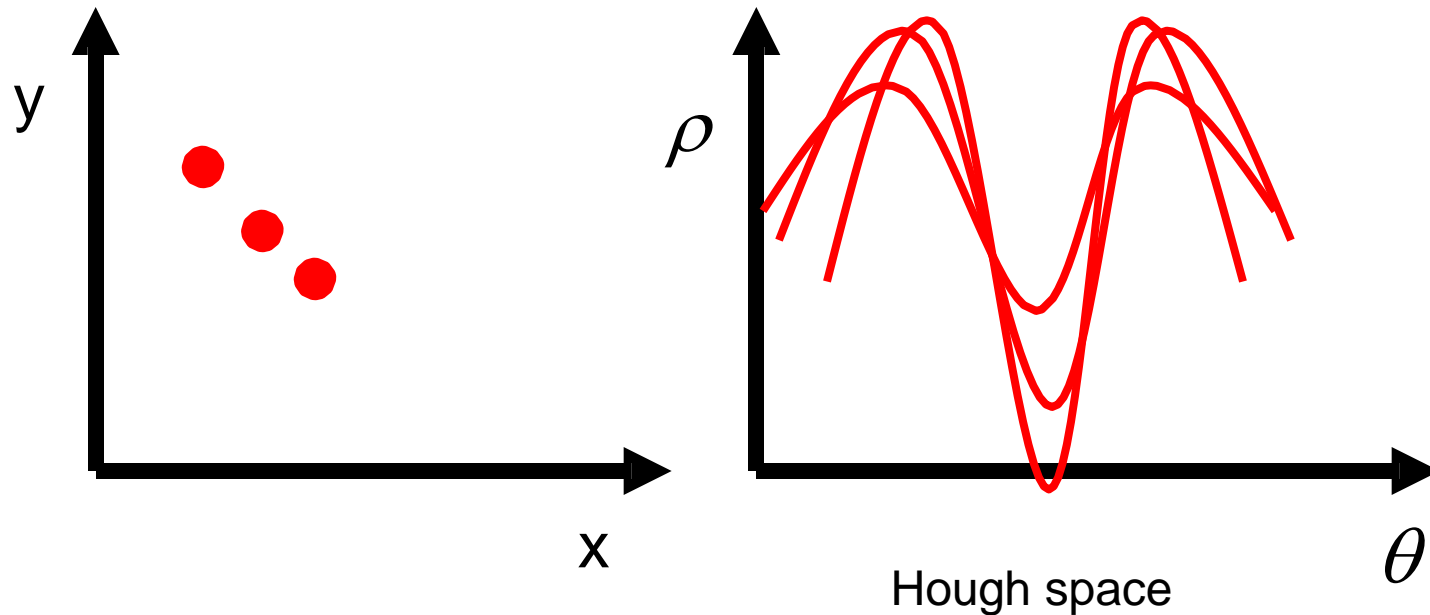


$$x \cos \theta + y \sin \theta = \rho$$

Hough transform

P.V.C. Hough, *Machine Analysis of Bubble Chamber Pictures*, Proc. Int. Conf. High Energy Accelerators and Instrumentation, 1959


Issue : parameter space $[m,b]$ is unbounded...

Use a polar representation for the parameter space

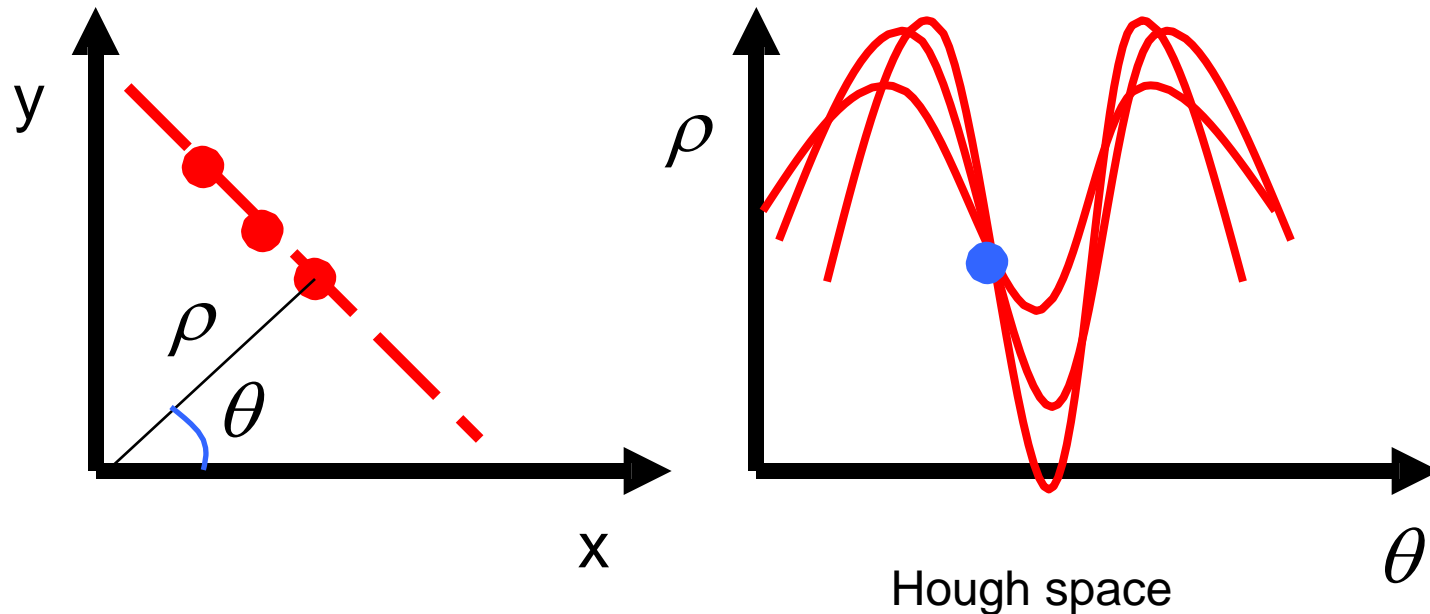


$$x \cos \theta + y \sin \theta = \rho$$

Hough transform - experiments

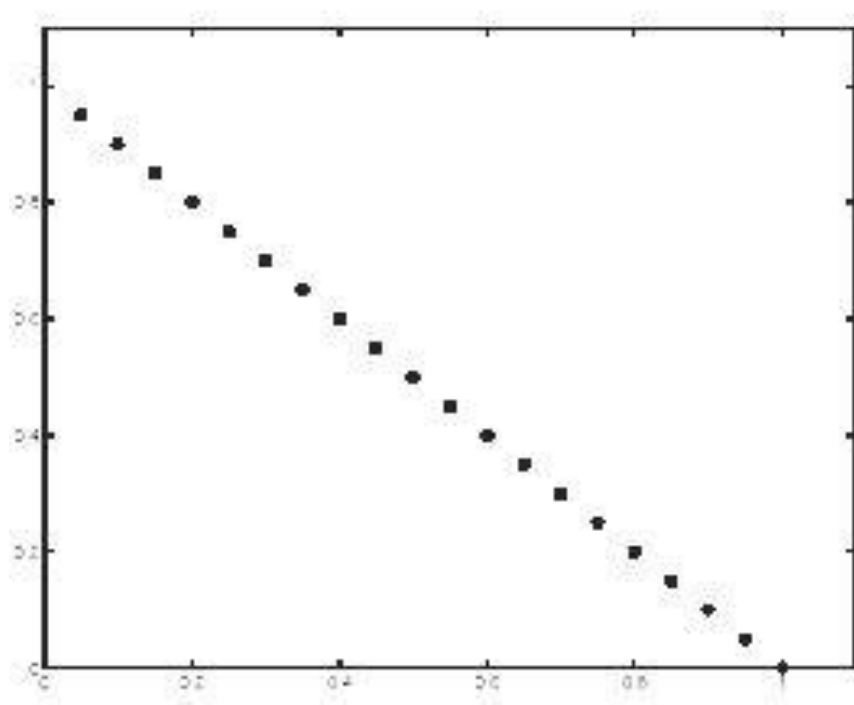


features

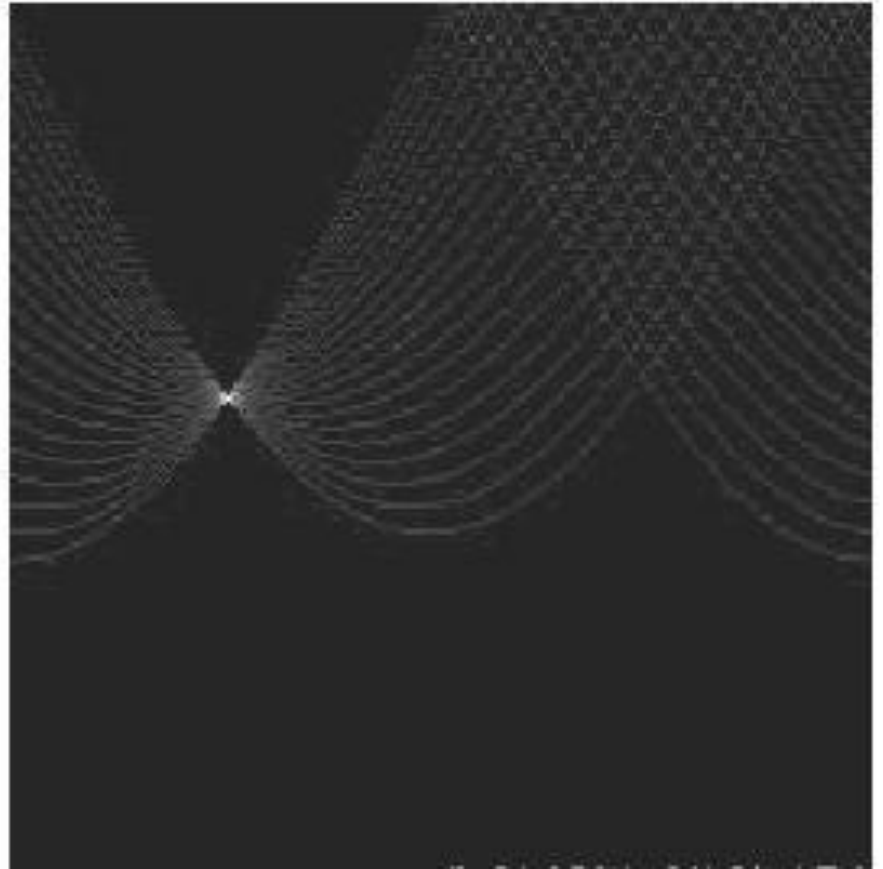


votes

Hough transform - experiments

Noisy data

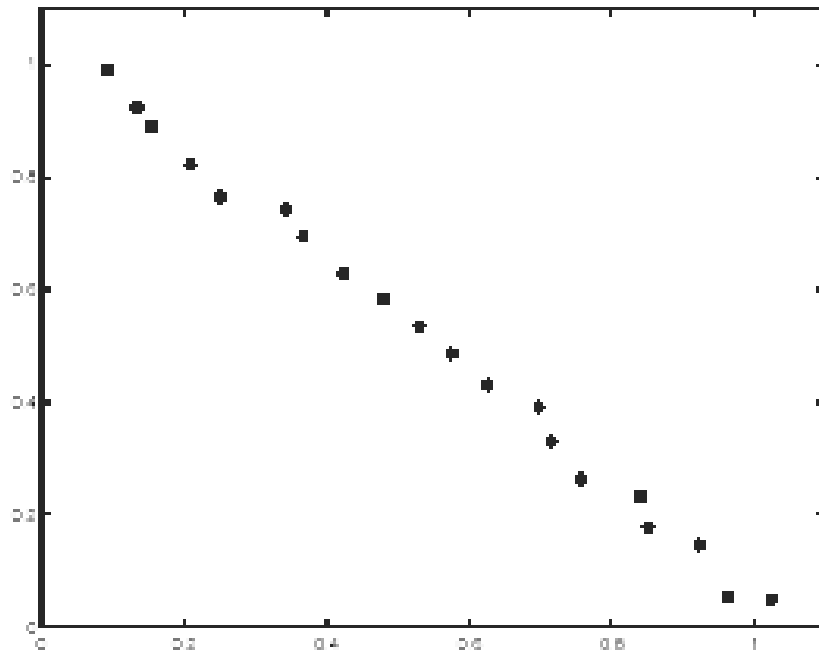


features

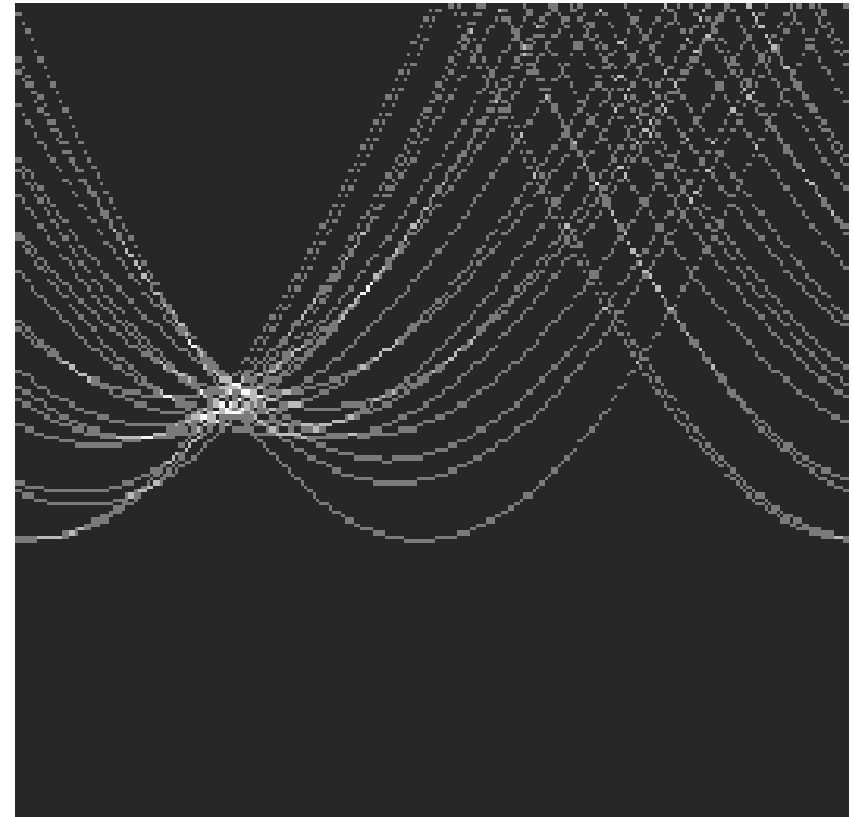

votes



Need to adjust grid size or smooth

Hough transform - experiments

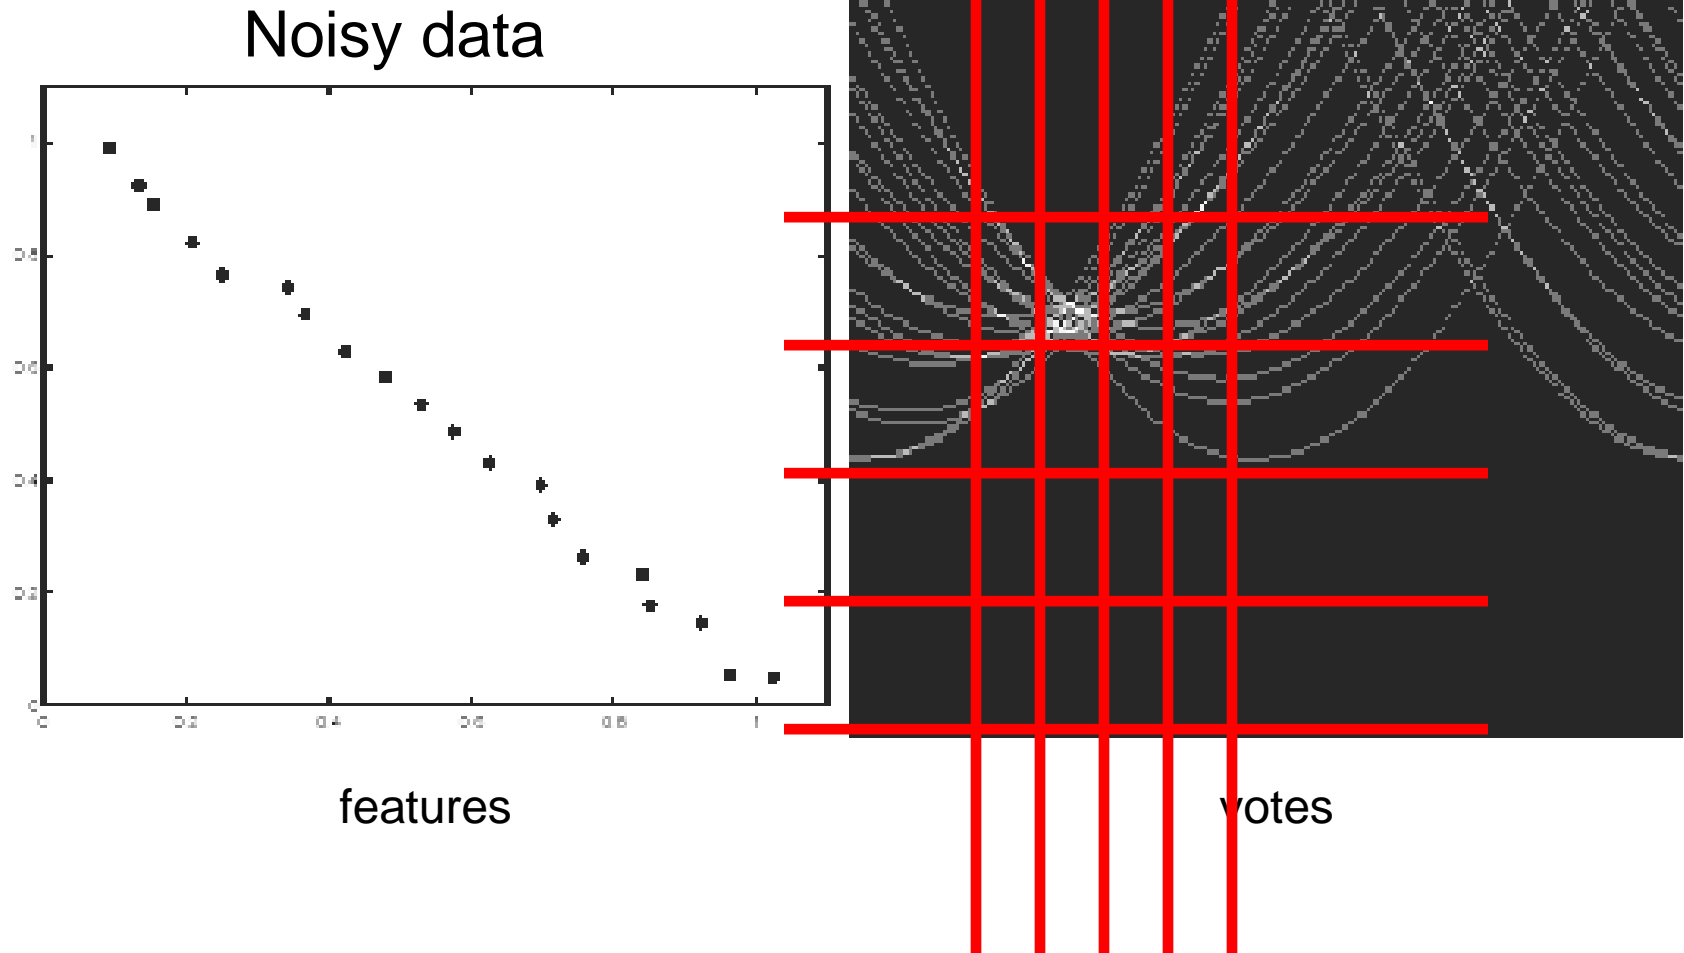

Need to adjust grid size or smooth

Hough transform - experiments

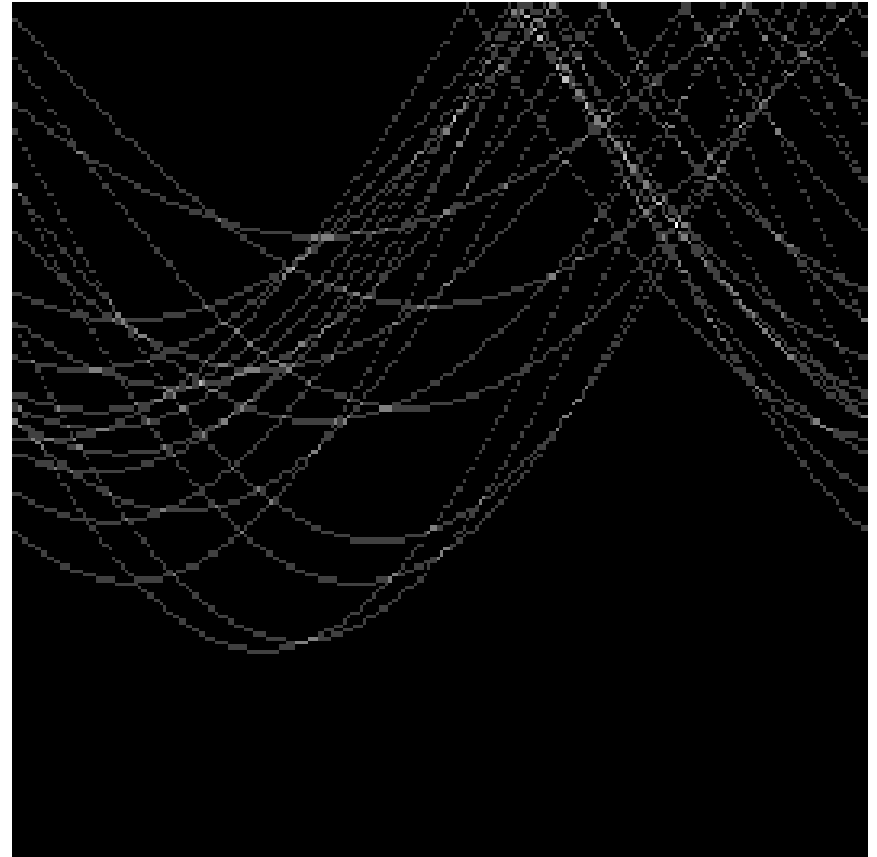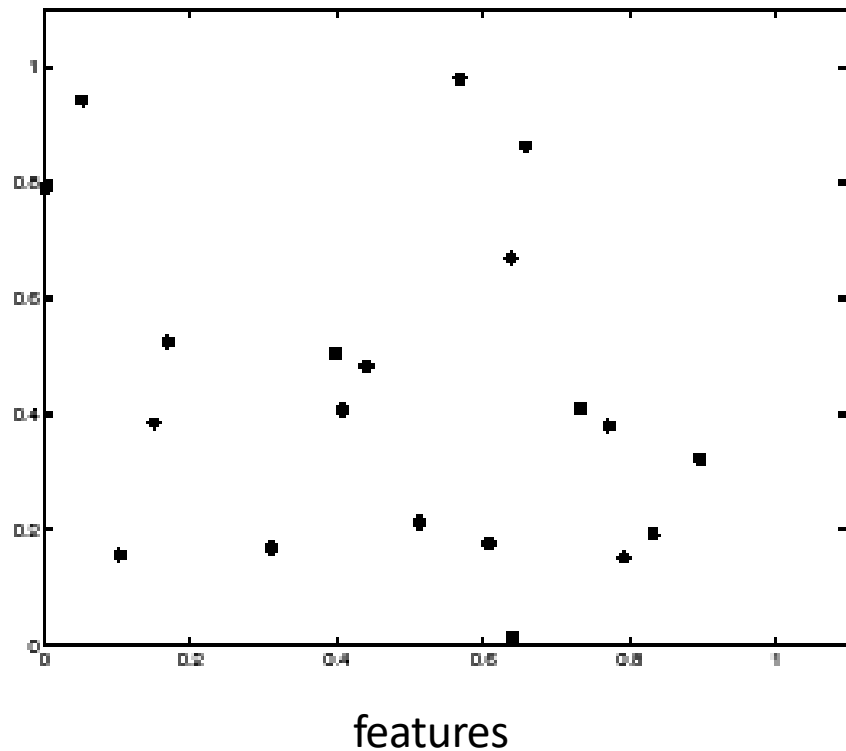

Issue: spurious peaks due to uniform noise

1. Image → Canny




2. Canny \rightarrow Hough votes



3. Hough votes \rightarrow Edges

Find peaks and post-process

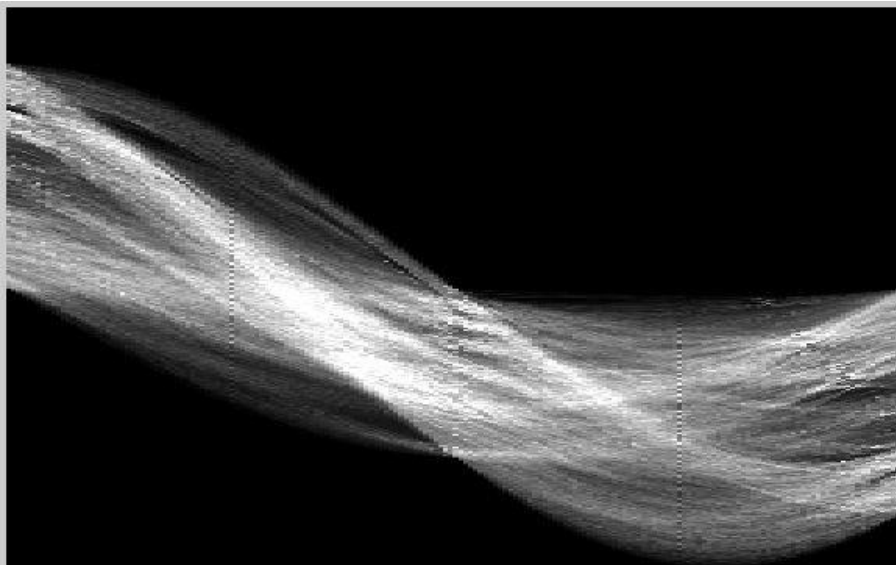


Hough transform for circles

- Circle: center (a,b) and radius r

$$(x_i - a)^2 + (y_i - b)^2 = r^2$$

- For a fixed radius r

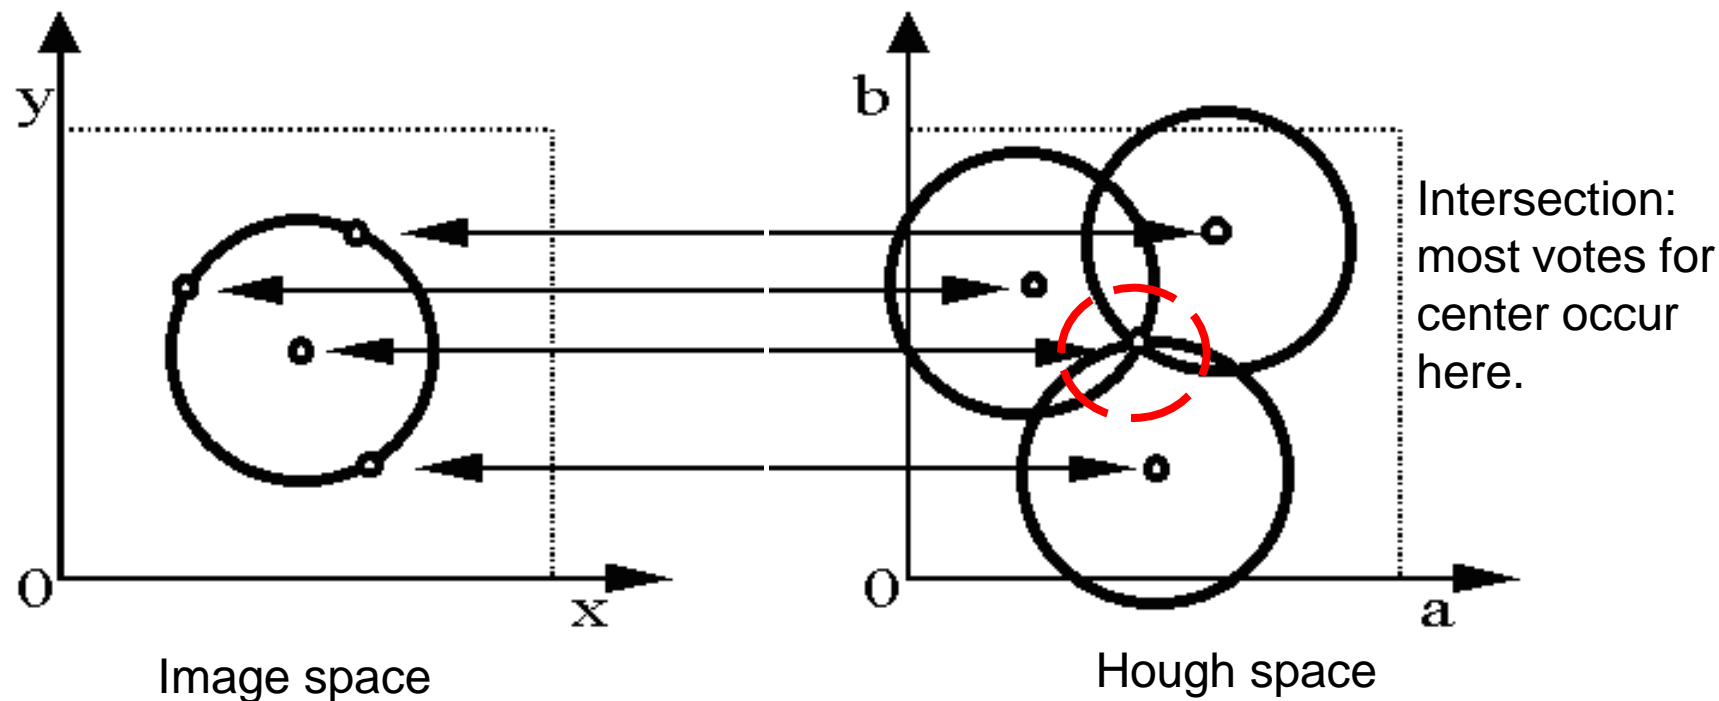

Hough transform conclusions

Good

- Robust to outliers: each point votes separately
- Fairly efficient (much faster than trying all sets of parameters)
- Provides multiple good fits

Hough transform conclusions

Good

- Robust to outliers: each point votes separately
- Fairly efficient (much faster than trying all sets of parameters)
- Provides multiple good fits

Bad

- Some sensitivity to noise
- Bin size trades off between noise tolerance, precision, and speed/memory
 - Can be hard to find sweet spot
- Not suitable for more than a few parameters
 - grid size grows exponentially

Hough transform conclusions

Good

- Robust to outliers: each point votes separately
- Fairly efficient (much faster than trying all sets of parameters)
- Provides multiple good fits

Bad

- Some sensitivity to noise
- Bin size trades off between noise tolerance, precision, and speed/memory
 - Can be hard to find sweet spot
- Not suitable for more than a few parameters
 - grid size grows exponentially


Common applications

- Line fitting (also circles, ellipses, etc.)
- Object instance recognition (parameters are position/scale/orientation)
- Object category recognition (parameters are position/scale)

RANSAC

(**R**ANdom **S**Amples **C**onsensus) :

Fischler & Bolles in '81.

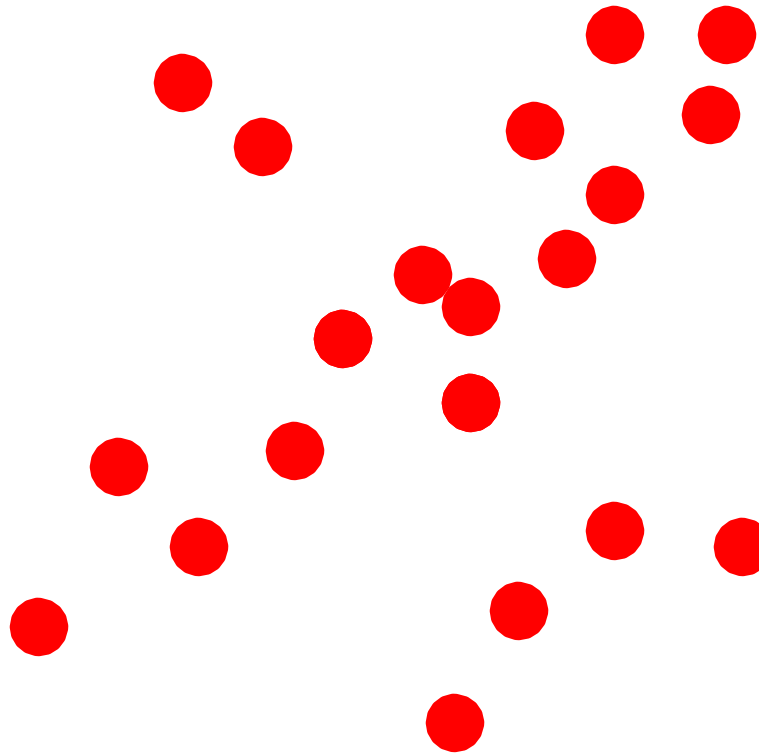


Algorithm:

1. **Sample** (randomly) the number of points required to fit the model
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

Line fitting example

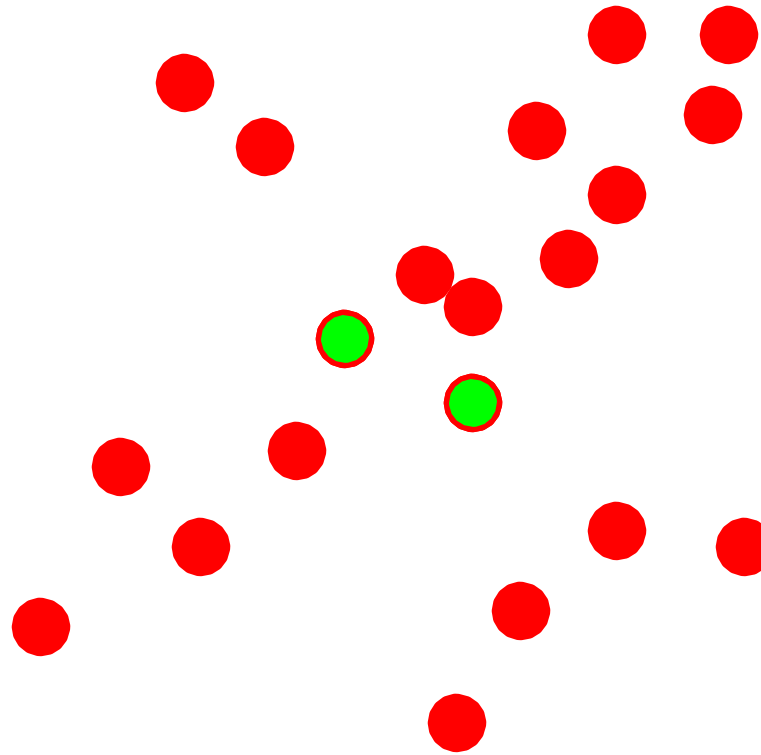

Algorithm:

1.Sample (randomly) the number of points required to fit the model ($\#=2$)


2.Solve for model parameters using samples

3.Score by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

Line fitting example

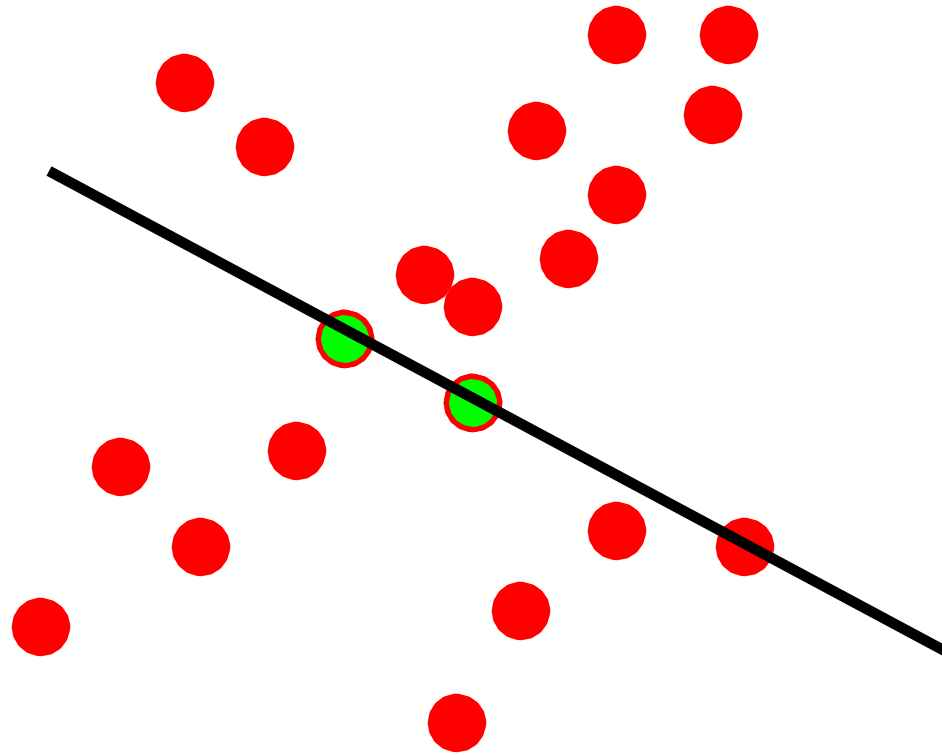


Algorithm:

1. **Sample** (randomly) the number of points required to fit the model ($n=2$)
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

Line fitting example

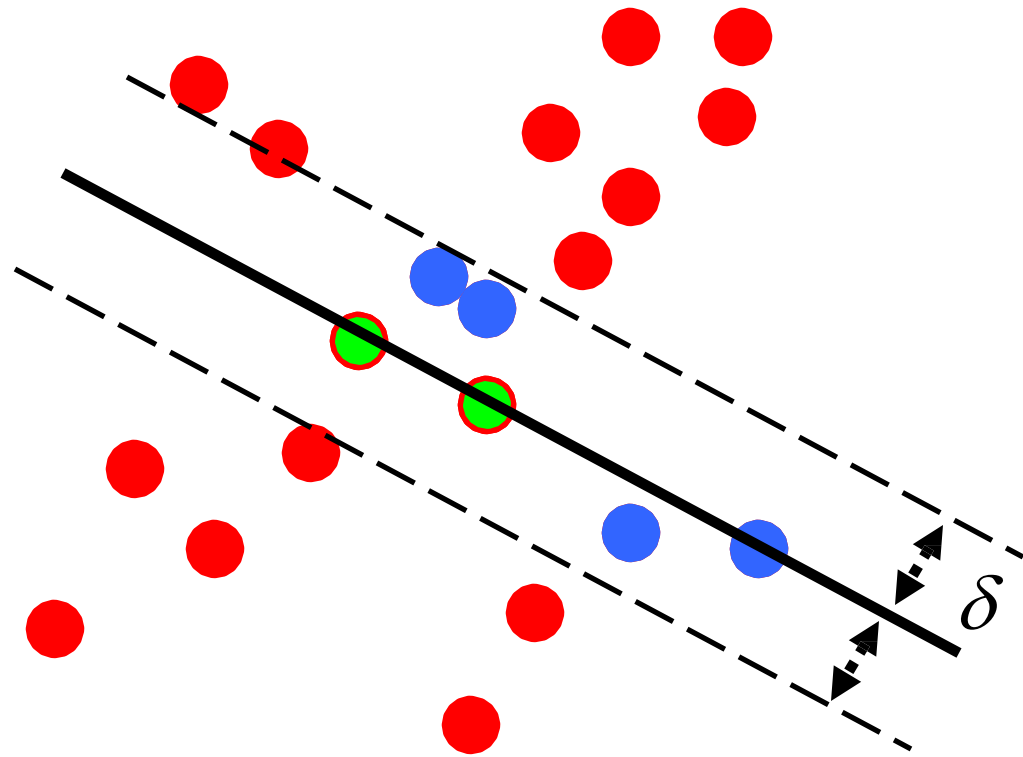


$$N_I = 6$$

Algorithm:

1. **Sample** (randomly) the number of points required to fit the model ($\# = 2$)
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

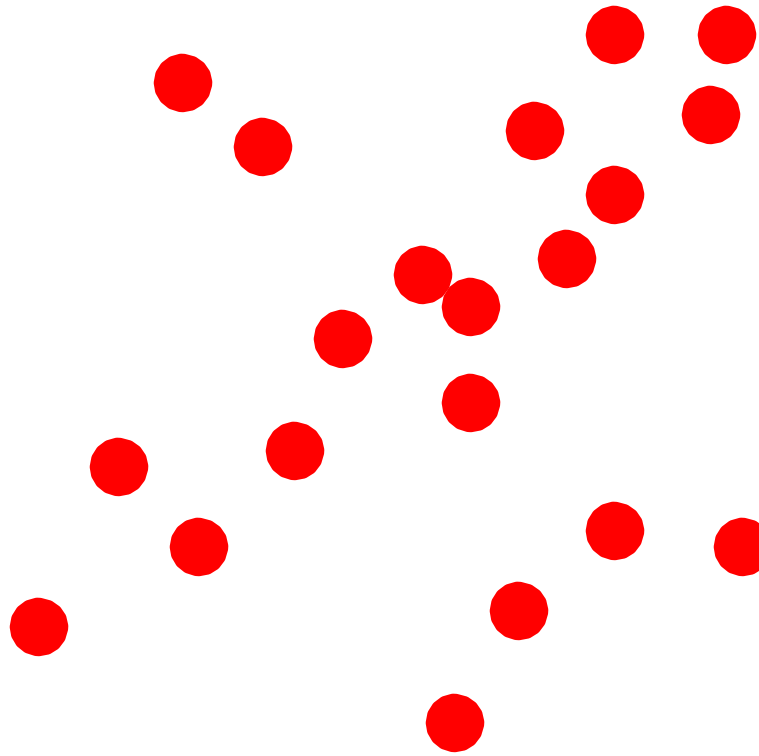


Algorithm:

1. **Sample** (randomly) the number of points required to fit the model ($\# = 2$)
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

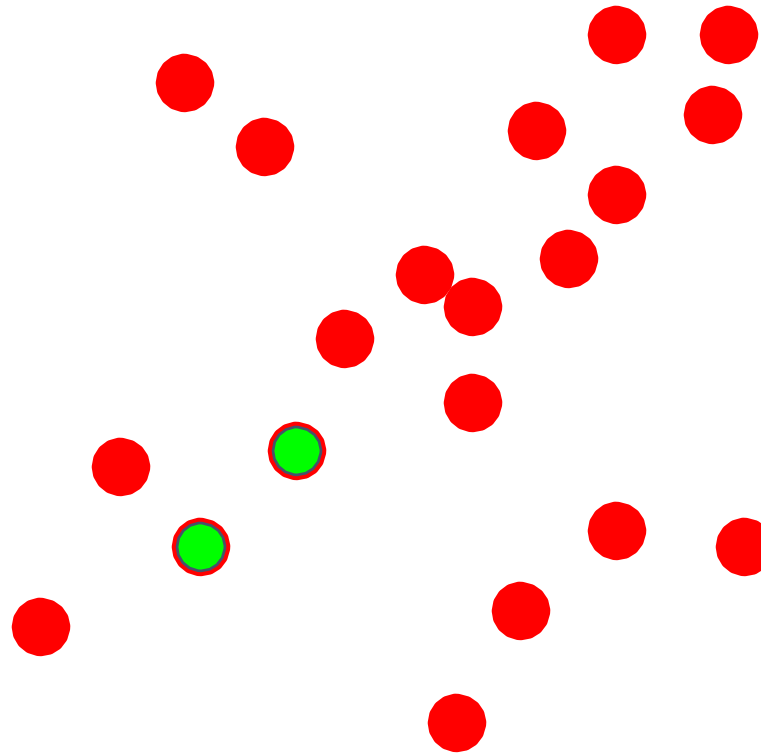


Algorithm:

1. **Sample** (randomly) the number of points required to fit the model ($\#=2$)
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

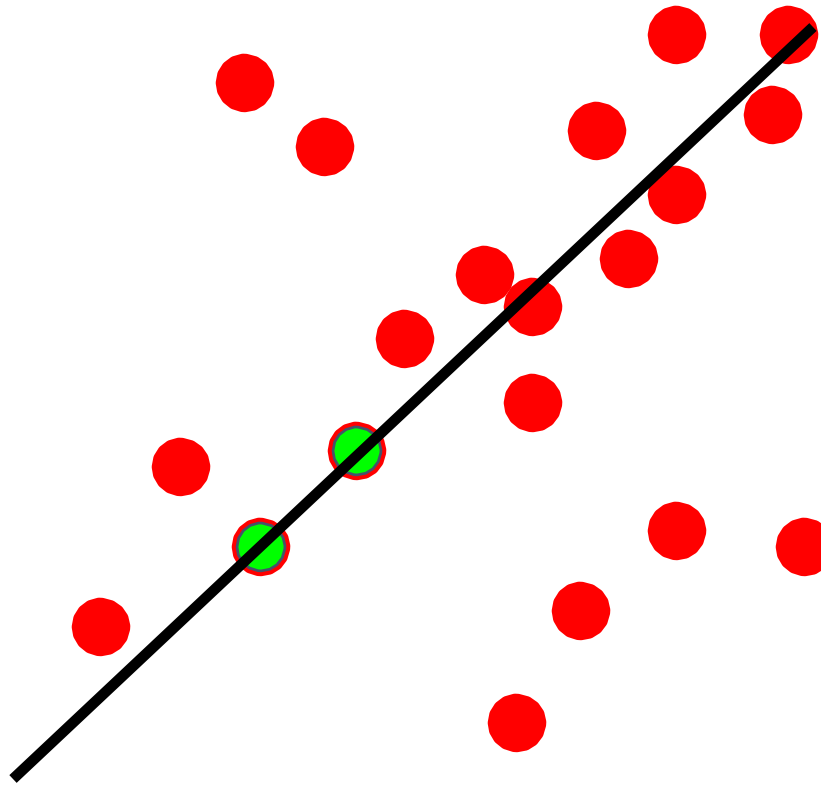


Algorithm:

1. **Sample** (randomly) the number of points required to fit the model ($\#=2$)
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

RANSAC

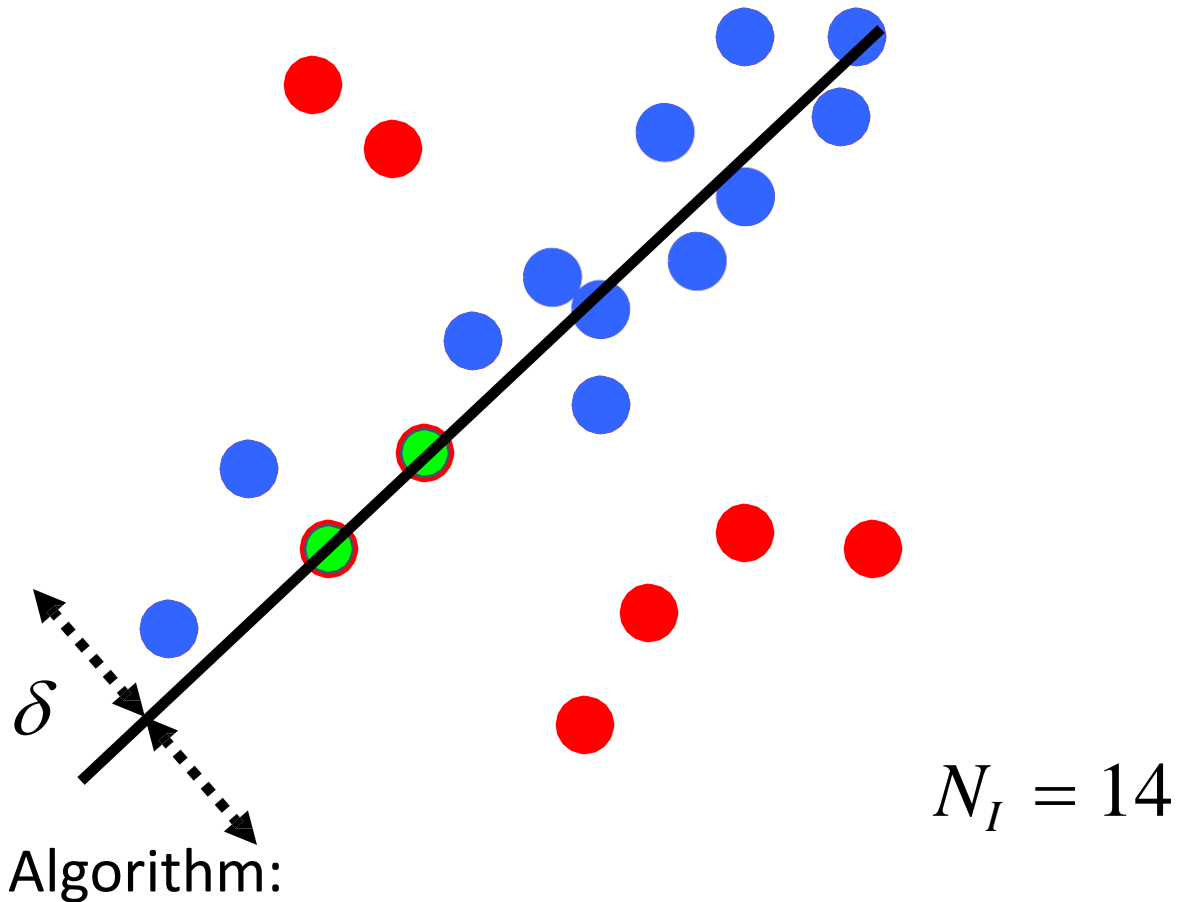

- 1.Sample** (randomly) the number of points required to fit the model ($\#=2$)
- 2.Solve** for model parameters using samples
- 3.Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

How to choose parameters?

- Number of samples N
 - Choose N so that, with probability p , at least one random sample is free from outliers (e.g. $p=0.99$) (outlier ratio: e)
- Number of sampled points s
 - Minimum number needed to fit the model
- Distance threshold δ
 - Choose δ so that a good point is likely (e.g., prob=0.95) within threshold

How to choose parameters?

- Number of samples N
 - Choose N so that, with probability p , at least one random sample is free from outliers (e.g. $p=0.99$) (outlier ratio: e)
- Number of sampled points s
 - Minimum number needed to fit the model
- Distance threshold δ
 - Choose δ so that a good point is likely (e.g., prob=0.95) within threshold

$$N = \log(1-p) / \log(1-(1-e)^s)$$

How to choose parameters?

- Number of samples N
 - Choose N so that, with probability p , at least one random sample is free from outliers (e.g. $p=0.99$) (outlier ratio: e)
- Number of sampled points s
 - Minimum number needed to fit the model
- Distance threshold δ
 - Choose δ so that a good point is likely (e.g., prob=0.95) within threshold

$$N = \log(1-p) / \log(1 - (1-e)^s)$$

proportion of outliers e								
s	5%	10%	20%	25%	30%	40%	50%	
2	2	3	5	6	7	11	17	
3	3	4	7	9	11	19	35	
4	3	5	9	13	17	34	72	
5	4	6	12	17	26	57	146	
6	4	7	16	24	37	97	293	
7	4	8	20	33	54	163	588	
8	5	9	26	44	78	272	1177	

RANSAC conclusions

Good

- Robust to outliers
- Applicable for larger number of objective function parameters than Hough transform
- Optimization parameters are easier to choose than Hough transform

RANSAC conclusions

Good

- Robust to outliers
- Applicable for larger number of objective function parameters than Hough transform
- Optimization parameters are easier to choose than Hough transform

Bad

- Computational time grows quickly with fraction of outliers and number of parameters
- Not as good for getting multiple fits (though one solution is to remove inliers after each fit and repeat)

RANSAC conclusions

Good

- Robust to outliers
- Applicable for larger number of objective function parameters than Hough transform
- Optimization parameters are easier to choose than Hough transform

Bad

- Computational time grows quickly with fraction of outliers and number of parameters
- Not as good for getting multiple fits (though one solution is to remove inliers after each fit and repeat)

Common applications

- Computing a homography (e.g., image stitching)
- Estimating fundamental matrix (relating two views)

Things to remember

- Least Squares Fit
 - closed form solution
 - robust to noise
 - not robust to outliers
- Hough transform
 - robust to noise and outliers
 - can fit multiple models
 - only works for a few parameters (1-4 typically)
- RANSAC
 - robust to noise and outliers
 - works with a moderate number of parameters (e.g, 1-8)

Acknowledgements

- Thanks to the following researchers for making their teaching/research material online
 - Forsyth
 - Steve Seitz
 - Noah Snavely
 - J.B. Huang
 - Derek Hoiem
 - D. Lowe
 - A. Bobick
 - S. Lazebnik
 - K. Grauman
 - R. Zaleski
 - Leibe
 - And many more