



India's Most Reliable GPS Solution



Stcoverseas Enhancing Solution

Corporate Address

B-110 1st Floor, Sector 64 Noida
Gautam Budh Nagar, Uttar
Pradesh 201301

Operations Address

B-110 1st Floor, Sector 64 Noida
Gautam Budh Nagar, Uttar
Pradesh 201301

Toll Free No. +91 9811 249072 | <https://stcoverseas-ijn9.onrender.com>



Our Premier Partners



BOSCH
Invented for life



GPS TRACKER



PT18



PS03



PS10A



PT200

OBD TRACKER



GS21



GS21A



PS22



PS25

ASSET TRACKER



PT20



PT08 2G



PT08SA 4G



PT30

E- LOCKS



T98 E 4G



PL400/PL1800



PL610S/PL620S



PL610/PL620

DASHCAMS



T98 AI



T98 AI



T98 1+2



T98 1+3

FUEL SENSORS



STRELA D485



STRELA WD




STRELA WS



CLS2

GPS TRACKER APPLICATION

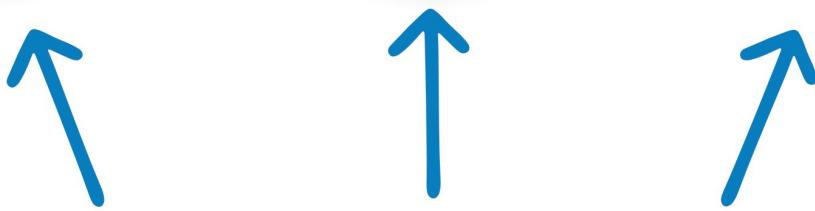



Welcome To The World of **GPS Tracker**





PT06



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.

Voltage Input 9-90v

Device weight 30g

Operating Temperature -20C - 70C

Back-up Battery 55mAh

Dimension(mm) 72(L)*31(W)*12(H)



PT19H



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Over-speed Alarm

A safety feature that uses GPS and a database of speed limits to warn drivers when they are speeding



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.

Voltage Input 9-90v

Device weight 32g

Operating Temperature -20C - 70C

Back-up Battery 55mAh

Dimension(mm) 74(L)*35(W)*13(H)





Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



Voltage Input	5-32V
Device weight	33g
Operating Temperature	-20C - 70C
Back-up Battery	250mAh
Dimension(mm)	74(L)*32(W)*14(H)

AC + Door Detection

- 1.The device is enabled to alert of the door being opened and closes
- 2.The device is enabled to alert of the AC being switched On and Off



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.



PS03



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



Voltage Input	9-90v
Device weight	50g
Operating Temperature	-20C - 70C
Back-up Battery	55mAh
Dimension(mm)	74(L)*32(W)*14(H)

Temperature Detection

Device sends an alert when the vehicle temperature deviates from the preset range



Rapid Acceleration

When your speed is over what you set, it will send alarm to remind you keep safe.



PS07



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



ACC Detection

ACC detection is the detection of vehicle ignition switch

Voltage Input	9.90v
Device weight	30g
Operating Temperature	-20C - 70C
Back-up Battery	55mAh
Dimension(mm)	75(L)*33(W)*12(H)



PT17H



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



SOS + MIC

1. Enables to monitor unusual sounds.
2. Alerts you in emergency situations.



Mileage Data

A safety feature that uses GPS and a database of speed limits to warn drivers when they are speeding



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.

Voltage Input	9.90v
Device weight	32g
Operating Temperature	-20C - 70C
Back-up Battery	55mAh
Dimension(mm)	75(L)*33(W)*12(H)



G17S



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



AC + Door Detection

- 1.The device is enabled to alert of the door being opened and closes
- 2.The device is enabled to alert of the AC being switched On and Off



SOS

Trigger an emergency call instantly when in danger.



Analog Input

Supports external sensors for temperature, or pressure.

Voltage Input 5-32V

Device weight 47g

Operating Temperature -20C - 70C

Back-up Battery 250 mAh

Dimension(mm) 76(L)*27(H)*14(H)



P09N



Real Time Tracking

Update position every 10 seconds with continuous tracking



ACC Detection

Alerts the user when the vehicle power is turned ON or OFF.



Wire Cut Alert

Notifies the user if the GPS wire is cut.



Remotely Cut-off Petrol

Allows remote fuel and power cut-off for added security in case of anomalies.

Voltage Input 9-28V

Device weight 398g

Operating Temperature -20C - +70C

Back-up Battery 300mAh

Dimension(mm) 82(L)*30.5(W)*14.8(H)



PT101B



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Dual Server Enabled GPS

A GPS tracking device that can connect to two servers



Trace Playback

Device provide trace history of your vehicle/asset



SOS+MIC

1. Make emergency call when in danger
2. Device enabled to communicate the sounds in the vehicle

Voltage Input 9-90v

Device weight 48g

Operating Temperature -20C - 80C

Back-up Battery 55mAh

Dimension(mm) 80(L)*34(W)*15(H)



PT100



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Dual Server

Support uploading location data to two servers simultaneously



RS232

RS232 port can be equipped with a Camera, RFID, magnetic card reader or OBD II reader



SOS+MIC

1. Make emergency call when in danger
2. Device enabled to communicate the sounds in the vehicle

Voltage Input 9-90v

Device weight 106g

Operating Temperature -20C - 80C

Back-up Battery 500mAh

Dimension(mm) 99(L)*54(W)*19.5(H)



PT200



Real Time Tracking

Update position every 10 seconds with continuous tracking



Three Server Enabled

A GPS tracking device that can connect to three servers



Geo-fence Alarm

Users can set a range of geo-fence on map with circle, polygon or customize shape, and it will alarm when the device gets in or out of presetting range via APP or SMS



Over-Speed Alarm

Sends an alert when the vehicle exceeds the preset speed limit to promote safer driving.

Voltage Input 9V - 90V

Device weight 38g

Operating Temperature -20C - 75C

Back-up Battery 300mAh

Dimension(mm) 82(L)*30.5(W)*14.8(H)

2G **4G**

GS900



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Driver Behaviour

Use GPS data and other sensors to track and analyze a driver's actions, helping to improve safety and efficiency



Light Sensor

A device that uses a light sensor and GPS to detect when a device is exposed to light or when it is placed in darkness.



Rapid Acceleration

A device that measures the rate of change in velocity (acceleration) of an object over time

Voltage Input 9-90v

Device weight 28g

Operating Temperature -25C - 75C

Back-up Battery 55mAh

Dimension(mm) 85(L)*24(W)*14(H)

2G / 4G

PT18



Real Time Tracking

Update position every 10 seconds with continuous tracking



SOS+MIC

1. Make emergency call when in danger
2. Device enabled to communicate the sounds in the vehicle



Mileage Report

A safety feature that uses GPS and a database of speed limits to warn drivers when they are speeding



G-Sensor (3-Axis)

Detects sudden movements like acceleration, braking, or impact.

PS10A

Voltage Input 9.90v

Device weight 51g

Operating Temperature -20C - 75C

Back-up Battery 250mAh

Dimension(mm) 79.5(L)42(W)12.5(H)



MILEAGE REPORT

It can help you to know how far you drive



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time.



BLE 5.0 Sensor

Advanced Bluetooth Connectivity for Seamless Integration With Additional Sensors



G-Sensor (3-Axis)

Detects sudden movements like acceleration, braking, or impact.



Fuel Sensor Support

Monitors fuel levels and consumption to prevent fuel theft.

Voltage Input 9-95V

Device weight 47g

Operating Temperature -20C - 75C

Back-up Battery 250 mAh

Dimension(mm) 79.5 (L) *42 (W)*12.5 (H)



PS10B

Fuel Sensor Support

Monitors fuel levels and consumption to prevent fuel theft.

Analog Input

Supports external sensors for fuel, temperature, or pressure monitoring.

BLE 5.0 Sensor Support

Advanced Bluetooth connectivity for seamless integration with additional sensors.



Real Time Tracking

Update position every 10 seconds with continuous tracking



RS485 Port

Advanced ports for gathering and analyzing fuel data.



BLE 5.0 Sensor Support

Advanced Bluetooth connectivity for seamless integration with additional sensors.



Fuel Sensor Support

Monitors fuel levels and consumption to prevent fuel theft.

Voltage Input 9.90V

Device weight 47g

Operating Temperature -20C - 75C

Back-up Battery 250mAh

Dimension(mm) 79.5(L)42(W)12.5(H)



PS10C

Fuel level sensor

500 l 370 l

ESCORT TD-500

RS485 Port

Advanced ports for gathering and analyzing fuel data.

Analog Input Digital

Supports external sensors for fuel, temperature, or pressure monitoring.

BLE 5.0 Sensor Support

Advanced Bluetooth connectivity for seamless integration with additional sensors.



Welcome To The World
of
Asset Tracker





PT30



Real Time Tracking

Update position every 10 seconds with continuous tracking



3000mAh Battery

3000mAh large battery for long standby time.



Driver Behaviour

If the vehicle's driving speed exceeds the set speed, an overspeed alarm is uploaded.



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input 4.12v

Device weight 92.5g


Operating Temperature -20C - +70C

Back-up Battery 3000mAh

Dimension(mm) 75(L)*45(W)*21(H)



Every Move, Always Tracked.

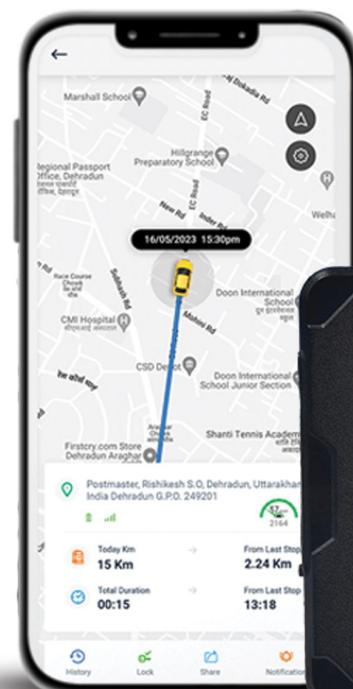



PT20

Real Time Tracking
Update position every 10 seconds with continuous tracking

Light Sensor
Device sends notification when someone removes the device from its place

6000mAh Battery
6000mAh large battery for long standby time.

Trace Playback
Device provide trace history of your vehicle/asset

Voltage Input	3.7V.
Device weight	175g
Operating Temperature	-25C - 80C
Back-up Battery	6000mAh
Dimension(mm)	80(L)*50(W)*32(H)

2G 4G



PT08SA

Real Time Tracking
Update position every 10 seconds with continuous tracking

Driver Behaviour
Device sends notification when someone removes the device from its place

10000mAh Battery
10000mAh large battery for long standby time.

Trace Playback
Device provide trace history of your vehicle/asset

Voltage Input	3.7V.
Device weight	218.5g
Operating Temperature	-20C - +60C
Back-up Battery	10000mAh
Dimension(mm)	85(L)*61(W)*31(H)

2G 4G



PT -ID 02

Product Specifications

Real Time Tracking

Battery - Rechargeable 1500mAh

Network - 2G

GSM - 850/900/1800/1900MHz

Motion and Vibration Detection

Working Temperature: -20°C - 45°C

Tracking System - APP + Web + SMS

Features



Real Time Tracking



Safety Alerts



SOS Button



Set Safe Zone



Two Way Voice Calling



Monitoring





Welcome To The World *of* **OBD Tracker**





PS25

 **Real Time Tracking**
Update position every 10 seconds with continuous tracking

 **Mileage Report**
It can help you to know how far you drove.

 **Smart Plug and Play**
Easy to install with 16 pins to connect vehicle obd port.

 **Trace Playback**
Device provide trace history of your vehicle/asset

Voltage Input	3.7V.
Device weight	175g
Operating Temperature	-25C - 80C
Back-up Battery	55mAh
Dimension	80(L)*50(W)*32(H)





PS21

 **Real Time Tracking**
Update position every 10 seconds with continuous tracking

 **Car Diagnosis**
The smart system of the vehicle constantly monitors various functions of the vehicle.

 **Over-speed Alarm**
Device send an alert when the devices cross a preset speed

 **Trace Playback**
Device provide trace history of your vehicle/asset

Voltage Input	9-35v
Device weight	41g
Operating Temperature	-20C - 70C
Back-up Battery	60mAh
Dimension	47(L)*20(W)*43(H)





PS21A

**Real Time Tracking**

Update position every 10 seconds with continuous tracking

**Fast Positioning**

Provide a timely positioning service after installing it.

**Smart Plug and Play**

Easy to install with 16 pins to connect vehicle obd port.

**Mileage Report**

It can help you to know how far you drove.

Voltage Input	3.7V.
Device weight	175g
Operating Temperature	-25C - 80C
Back-up Battery	60mAh
Dimension(mm)	80(L)*50(W)*32(H)



PS22

**Real Time Tracking**

Update position every 10 seconds with continuous tracking

**Car Diagnosis**

The smart system of the vehicle constantly monitors various functions of the vehicle.

**Over-speed Alarm**

Device send an alert when the devices cross a preset speed

**Trace Playback**

Device provide trace history of your vehicle/asset

Voltage Input	9-35v
Device weight	41g
Operating Temperature	-20C - 70C
Back-up Battery	60mAh
Dimension(mm)	47(L)*20(W)*43(H)





T8608

**Real Time Tracking**

Update position every 10 seconds with continuous tracking

**BLE Accessories**

All Bluetooth accessories are supported with the device.

**Over-speed Alarm**

Aggressive driving behavior detection, e.g. harsh braking and acceleration

**Crash Detection**

Accident data collection for reconstruction and analysis

Voltage Input	7-32v
Device weight	50g
Operating Temperature	-30C - +80C
Back-up Battery	110 mah
Dimension(mm)	57(L)*50(W)*24(H)



TLD2 D

**Real Time Tracking**

Update position every 10 seconds with continuous tracking

**BLE Accessories**

All Bluetooth accessories are supported with the device.

**Over-speed Alarm**

Device send an alert when the devices cross a preset speed

**Trace Playback**

Device provide trace history of your vehicle/asset

Voltage Input	7-32v
Device weight	48g
Operating Temperature	-30C - +80C
Back-up Battery	200mAh
Dimension	60(L)*46(W)*22(H)





Welcome To The World *of* **Dashcam Tracker**



T98 NON AI DASHCAM GPS TRACKER

Product Features

Video: 2CH



Real Time Tracking

Resolution: build-in 1CH 1080P forward camera + 1CH 720P



Two Way Voice Calling

Storage: 1xTF card Max (512GB)

Working Voltage: 9-36V

Operation Temperature: -30°C - 70°C



T98 AI DASHCAM GPS TRACKER

Product Features

Video: 2CH

Real Time Tracking

Resolution: build-in 1CH 1080P + 1CH 720

AI: ADAS DMS


Storage: 1xTF card Max (512GB)

Working Voltage: 10-36V


Operation Temperature: -30°C - +60°C



ADAS

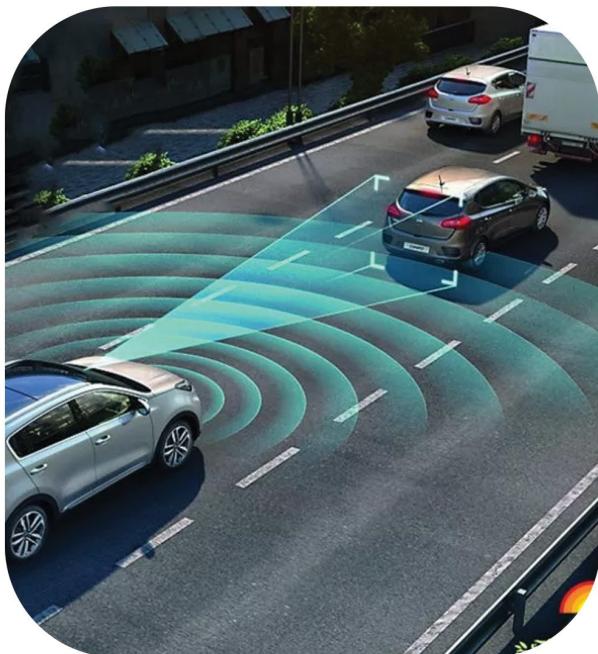

DMS

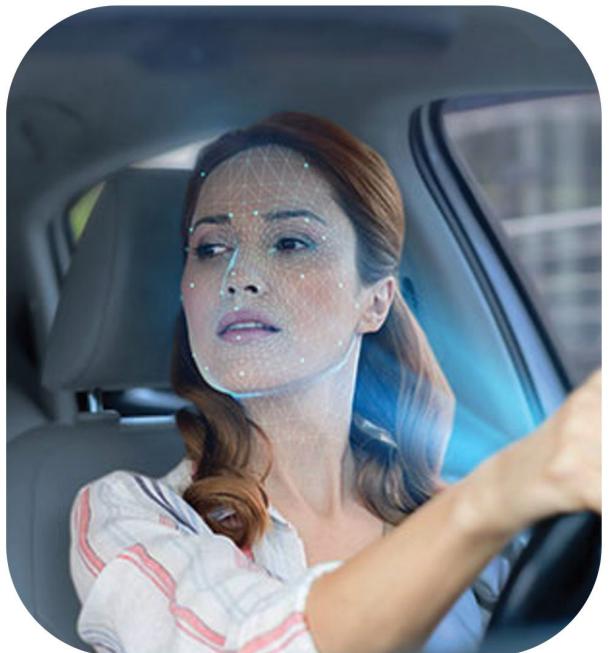

T98 1+2 DASHCAM GPS TRACKER

Product Features

Video: 3CH

Real Time Tracking

Resolution: build-in 1CH 1080P + 2CH 720


3 AXIS G- Sensor

ADAS & DMS

Storage: 1xTF card Max (512GB)

Working Voltage: 10 -36V

Operation Temperature: -20°C - +60°C

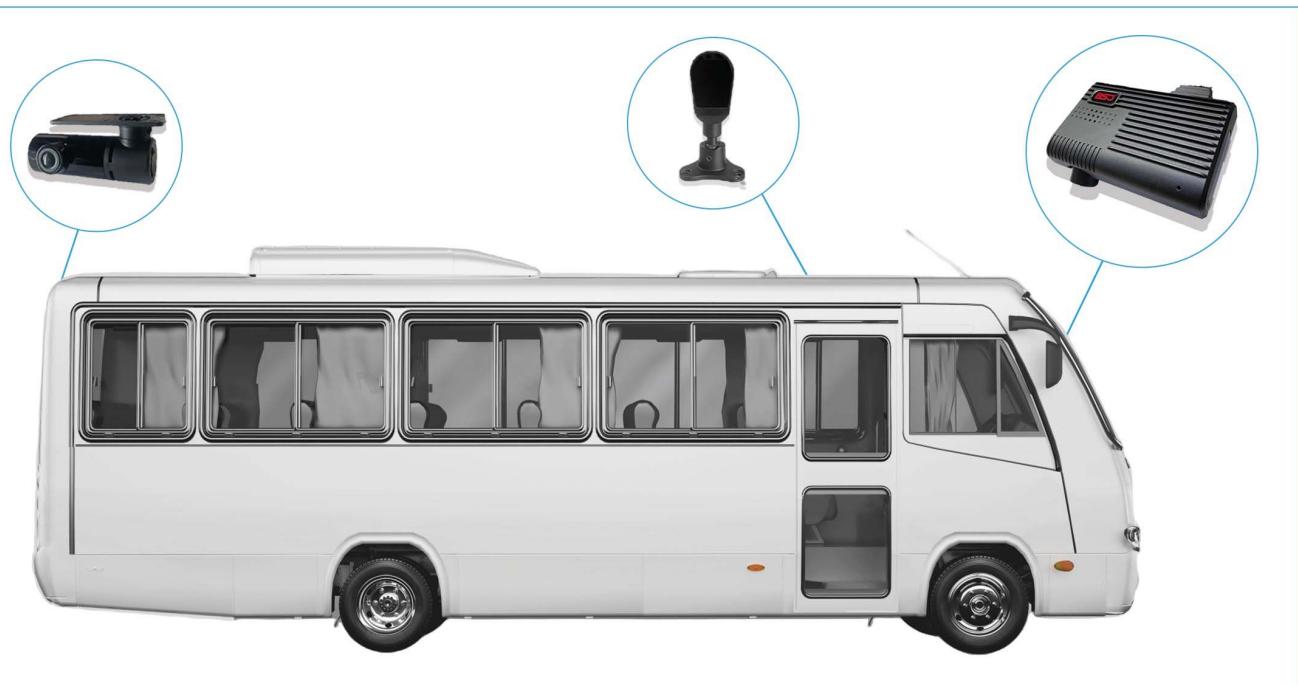

T98 1+3 DASHCAM GPS TRACKER

Product Features

Video: 4CH

Real Time Tracking

Resolution: build-in 1CH 1080P + 3CH 720

Support ADAS and DMS AI Safety

Storage: 2xTF card Max (512GB)

Working Voltage: 10V - 36V

Operation Temperature: -20°C - +60°C



T98 AI Dashcam GPS TRACKER

Product Features

Video: 2CH

Real Time Tracking

Resolution: build-in 1CH 1080P + 1CH 720

Support ADAS and DMS AI Safety


Storage: 1xTF card Max (512GB)

Working Voltage: +9V - +36V

Operation Temperature: -20°C - +70°C



ADAS

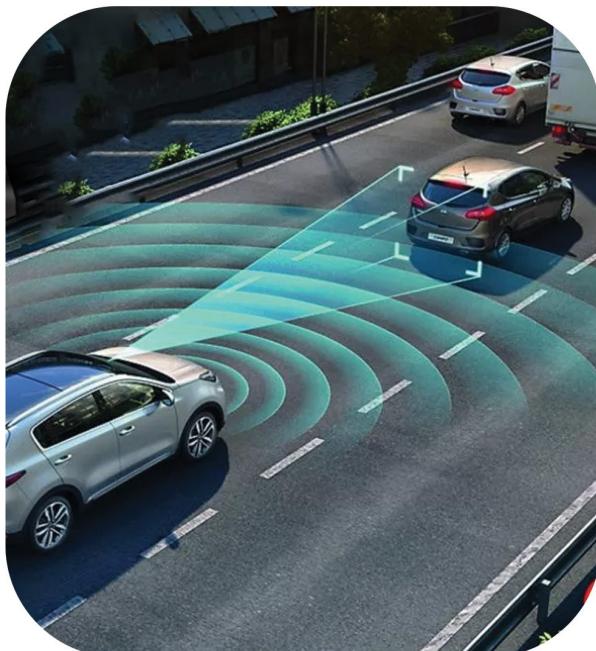

DMS



4G AI CAM GPS All in one

Product Features

Video: Out Door Camera



Real Time Tracking

Resolution: build-in 720* 1080

Human Detection




Storage: 1xTF card Max (512GB)

Working Voltage: 9V - 36V

Operation Temperature: -25°C - +70°C

Human Detection

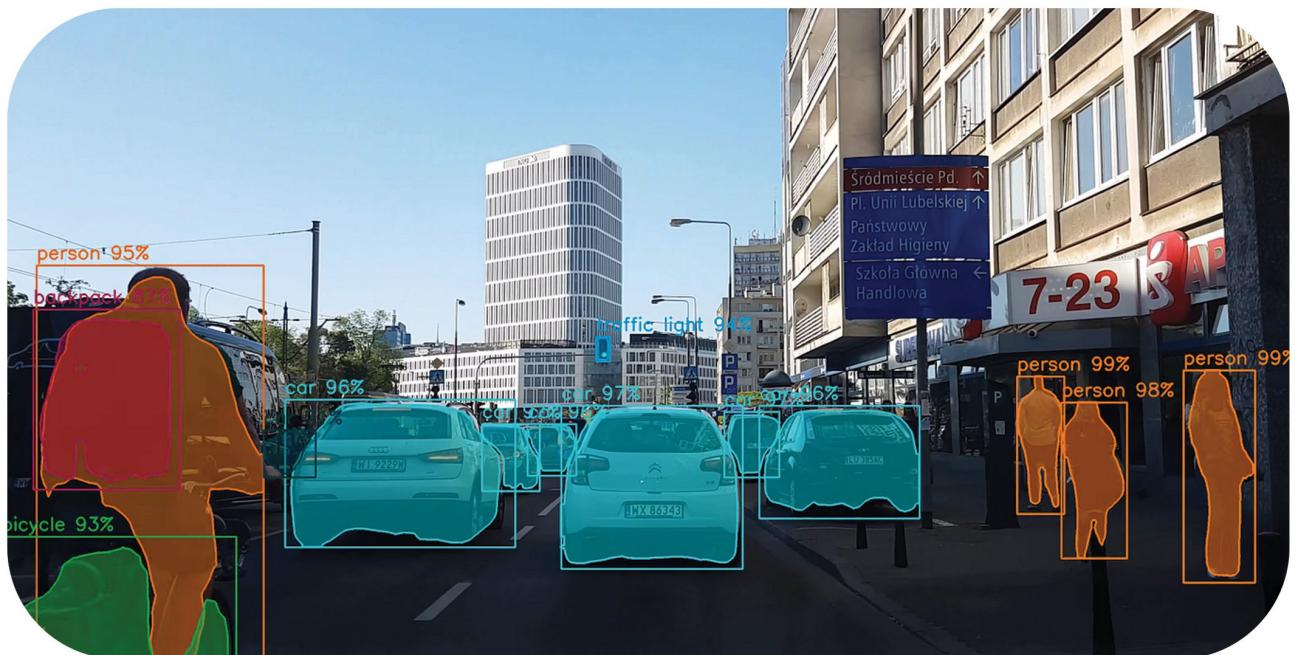



Welcome To The World of **E-Lock Tracker**



CONTAINER E- LOCK With GPS TRACKER

Product Features

Real Time Tracking

Multiple Unlock Method

Dual Sim Connectivity

2G/4G GSM & GPRS Support

Low Power Consumption

Working Voltage: 9V - 36V

Operation Temperature: -25°C - +70°C



[PL610](#)

[PL620](#)

2G

4G



Unlock Method

Unlock by RFID CARD

Unlock by Bluetooth

Unlock by Application

T98 E-LOCK WITH GPS TRACKER

Product Features

Real Time Tracking

Multiple Unlock Method

Display Oled Screen

4G GSM And GPRS

Remote Setting

Working Voltage: 36V - 42V

Operation Temperature: -20°C - 70°C



4G



Unlock Method

Unlock by RFID Card

Unlock by Password

Unlock by Bluetooth

Unlock by Application

CONTAINER E- LOCK With GPS TRACKER

Product Features

Real Time Tracking



Solar Panel

Multiple Unlock Method

Dual Sim Connectivity

2G/4G GSM & GPRS Support

Solar Panel

Working Voltage: 9V - 36V

Operation Temperature: -25°C - +70°C



[PL610S](#)



[PL620S](#)



Unlock Method

Unlock by RFID Card

Unlock by Bluetooth

Unlock by Application

MASTER SLAVE ELOCK GPS TRACKER

Product Features



Real Time Tracking

Multiple Unlock Method

10000mAH/18000mAh

Temper Sensor/Led Indicator/BLE5.2

Motion and Vibration Detection

Working Current : 4MA/90MA

Working Temperature: -20°C - +60°C



[PL400](#)

[PL1800](#)



Unlock Method

Unlock by RFID Card

Unlock by Password


Unlock by Application




Welcome To The World of **EV Vehicle Tracker**



Battery Management System

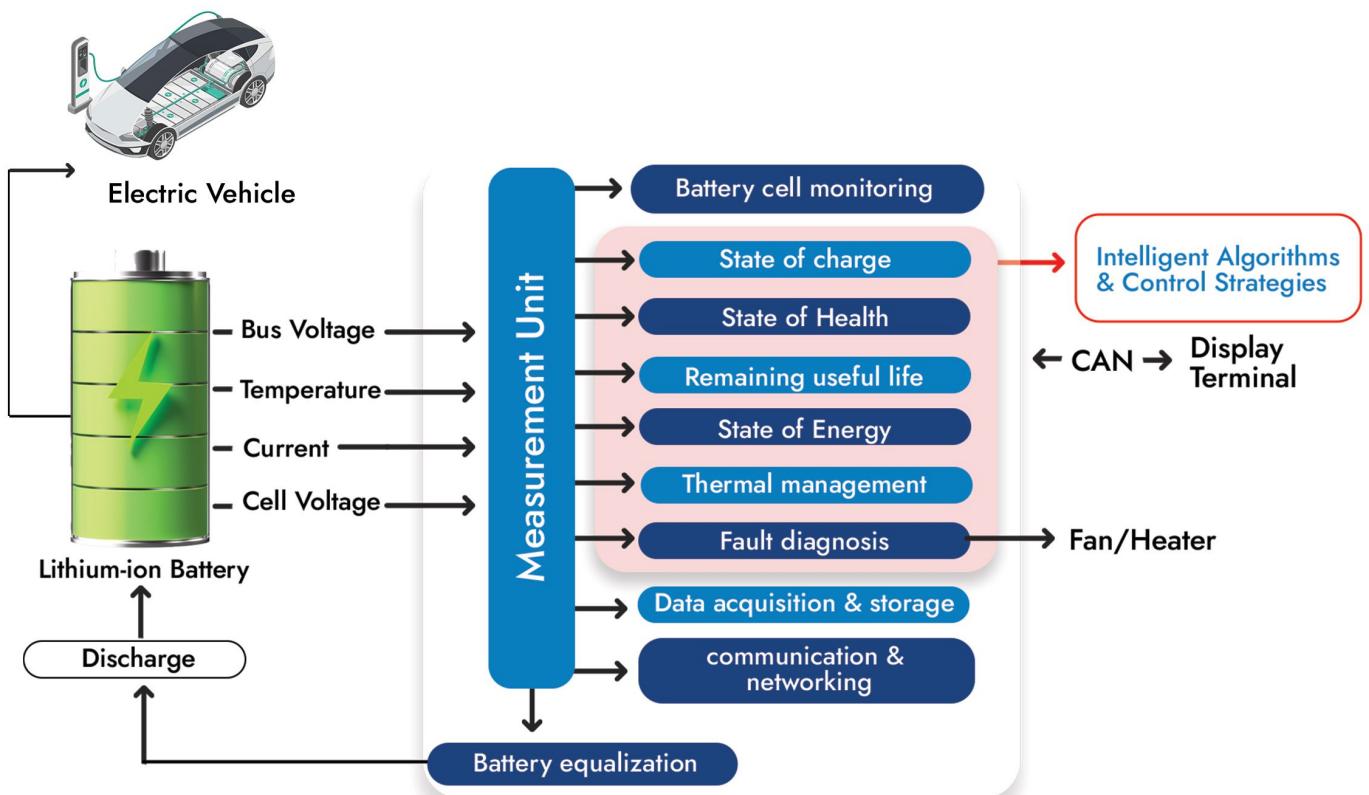

PS26 NON BMS

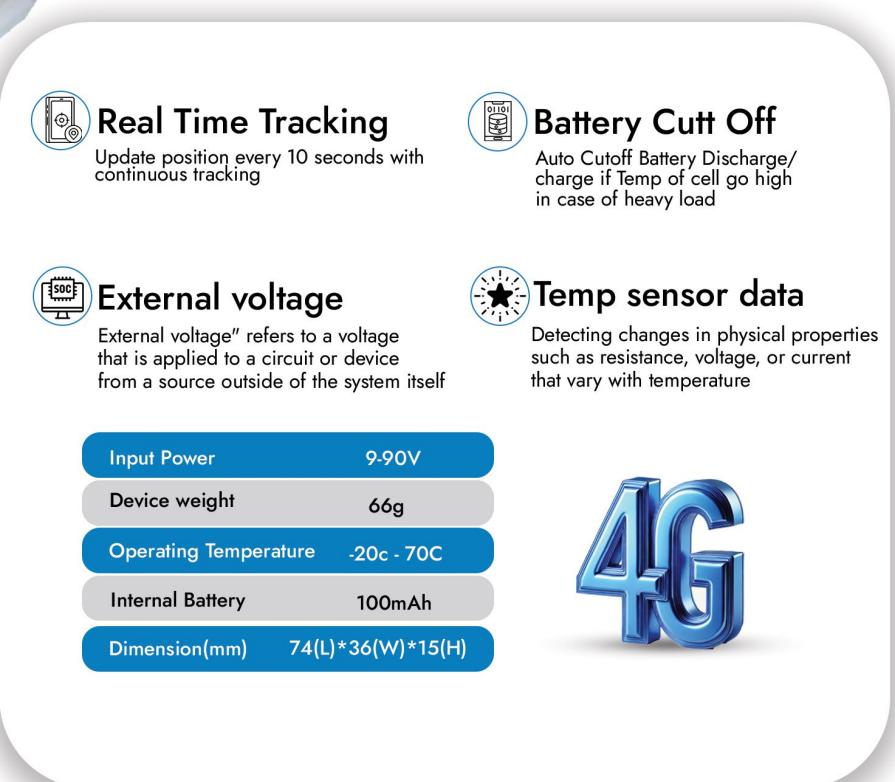



PS11

**Real Time EV Tracking**

Update position every 10 seconds
with continuous tracking

**Theft control**

A GPS tracking device used
to monitor the location of valuable
assets like vehicles

**Battery health**

A measure of how much charge
is available in a battery

**BLE supported**

Supported With Ble

Input Power	9.90V
Device weight	50g
Operating Temperature	-25 - 70C
Battery Power	60mAh
Dimension(mm)	78(L)*65(W)*31(H)

2G

Benefits of BMS in Electric Vehicles



Tracks voltage,
current & temperature




Prevents overcharge
or overheating




Estimates battery
charge level



Ensures uniform
charge across cells




Manages battery
temperature



Alerts for any
battery issues



Interfaces with
vehicle systems



optimizes power
flow for efficiency



PS26

**Real Time Tracking**

Update position every 10 seconds with continuous tracking

**Wheel Lock IOT**

A security device that combines a traditional wheel lock with GPS tracking technology

**Ignition Detection**

a GPS tracking device that allows it to monitor and report when a vehicle's ignition is turned on or off

**RTOS Based Device**

IoT devices. RTOSs are used to ensure that tasks are completed within strict time constraints.

Input Power	9.90V
Device weight	66g
Operating Temperature	-20c - 70C
Internal Battery	100mAh
Dimension(mm)	74(L)*36(W)*15(H)




Wheel Lock IOT





Welcome To The World of **Fuel Sensors**

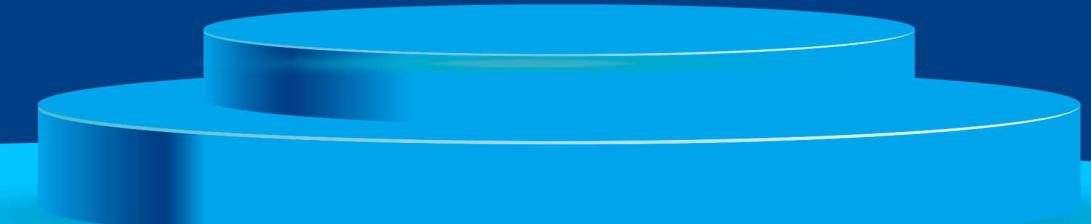

STRELA WD FUEL SENSOR With GPS TRACKER



Product Features

Ingress protection rating (IP67)

Bluetooth version (5.0 BLE)

Operation temperature (-40 - + 85C)

Calibration via Bluetooth

Transmission power (6dBm)

Built in Accelerometer

Ability Of Operation in the Mode
Master Slave

STRELA WS FUEL SENSOR With GPS TRACKER

Product Features

Interface (RS485)

Bluetooth version (5.0 BLE)

Bluetooth range Up to 100 m

Multiple modes of Calibration

Working temperature (-40 - +85C)

Power voltage (10-60V)

Built -in Accelerometer



STRELA D485 FUEL SENSOR With GPS TRACKER



Product Features

Length up to 700mm

Frequency (500-1500 Hz.)

Interface (RS485)

Calibration via web tool

Operational temperature (-40 to +65)

Ingress protection rating (IP67)

CLS2 FUEL SENSOR With GPS TRACKER

Product Features

Analog output signals

Ingress protection rating (IP65)

Operational temperature (-40 ~ +85)

Power supply: (DC10V ~ 32V)

Customizable Input Voltage

High Accuracy

Easy Setup





OUR SOFTWARE SOLUTIONS

White Label GPS Tracking Software

- Vehicle Tracking Software
- Accurate Fuel Tracking Software
- Dashcam Tracking Software
- E -locks Tracking Software



Toll Free No-9811 249072

| [www](https://stcoverseas-ijn9.onrender.com) https://stcoverseas-ijn9.onrender.com