CONVEY

PRODUCT CATALOG

ADVANCED RADIO COMMUNICATION SYSTEMS

2026 EDITION



www.conveyindia.in

COMPANY OVERVIEW

Convey India Pvt. Ltd. is a provider of professional two-way radio communication solutions designed for industries that require reliable, secure, and instant communication. The company offers advanced wireless communication systems including **Two-Way Radios, DMR Tier-I & Tier-II technologies, Ad-hoc & SFR communication, POC, ROIP, MCX, BDA systems, Tunnel Communication (DAS Systems), Video Surveillance, Public Addressing Systems, and Emergency Call Point solutions**.

In addition to wireless communication technologies, Convey also delivers a wide range of telecommunication systems such as **Fiber Optic Communication and Networking Systems, SDH/SONET & PDH networks, Teleprotection systems, MPLS-IP & MPLS-TP networks, CWDM & DWDM technologies, Microwave communication systems, KAVACH System (TCAS), G-PON, XG-PON, XGS-PON, FRMCS LTR/5G-R solutions, Dispatchers, Network Management Systems (NMS), and IT Network & Infrastructure services.**

Convey has experienced rapid growth in recent years across the fields of **Radio Communication, Telecommunication Systems, and IT Infrastructure,** delivering reliable and scalable solutions to meet the evolving communication needs of modern industries.

INDUSTRIES WE SERVE

Security | Construction | Mining | Railways | Oil & Gas



DMR DMR BASE RADIO SERIES

Convey delivers advanced digital communication solutions built for mission-critical performance, operational reliability, and scalable network infrastructure. Combining rugged hardware, intelligent **DMR** technology, extended coverage systems, and enterprise-grade communication capabilities, our mobile radios and repeater solutions are designed to perform in the toughest industrial and field environments.

Whether deployed across **transportation networks, construction sites, oil & gas facilities, mining operations, public safety systems, or large enterprise infrastructures**, Convey enables organizations to achieve secure, real-time, and uninterrupted communication ensuring teams remain connected, coordinated, and operational when it matters most.



WHY CHOOSE US!

- Reliable Communication
- Advanced Digital Technology
- Wide Coverage Solutions
- Rugged & Industrial Design
- Secure Communication
- Scalable Network Systems
- Long Battery Performance
- Trusted Across Industries



C1-DM

Professional DMR Mobile Radio

DESCRIPTION

The C1-DM DMR Mobile/Base Radio is a high-performance communication solution designed for vehicles and fixed installations. With DMR Tier II technology, powerful 25W output, AES-256 encryption, and advanced calling features, it delivers reliable, long-range communication for industries such as transportation, logistics, security, and emergency services

KEY FEATURES

- 25W High Power Output for Long Range Communication
- DMR Tier II Digital Technology
- AES-256 Secure Encryption
- Semi-Duplex Communication
- GPS & Bluetooth Support (Optional
- Emergency Alarm (SOS) & Call Alert
- DTMF Microphone with Backlit Keypad
- Scan & Priority Scan

SPECIFICATIONS

Display	2.0" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	1024
RF Power Output	25W
Channel Spacing	12.5 / 25 kHz
Operating Voltage	10.8V – 15.9V DC
Dimensions	175 × 175 × 63 mm
Weight	~1448 g
Audio Output Power	3W
GPS Accuracy	≤5 m
Protection Rating	IP54



C1-DM2

Professional DMR Mobile Radio

DESCRIPTION

The C1-DM2 DMR Mobile/Base Radio is a powerful and reliable communication solution designed for vehicle-mounted and fixed base operations. Equipped with DMR Tier II technology, 25W high power output, and AES-256 encryption, it ensures secure, long-range communication. With advanced calling features and optional GPS and Bluetooth support, it is ideal for transportation, logistics, and industrial applications.

KEY FEATURES

- 25W High Power Output for Long Range Communication
- DMR Tier II Digital Technology
- AES-256 Secure Encryption
- Semi-Duplex Communication
- GPS & Bluetooth Support (Optional
- Emergency Alarm (SOS) & Call Alert
- DTMF Microphone with Backlit Keypad
- Scan & Priority Scan

SPECIFICATIONS

Display	1.77" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	1024
RF Power Output	25W
Channel Spacing	12.5 / 25 kHz
Operating Voltage	10.8V – 15.9V DC
Dimensions	175 × 175 × 63 mm
Weight	~1510 g
Audio Output Power	3W
GPS Accuracy	≤5 m
Protection Rating	IP54



C1-DM3

Professional DMR Mobile Radio

DESCRIPTION


The C1-DM3 DMR Mobile/Base Radio is a premium high-performance communication solution designed for both vehicle-mounted and base station operations. With DMR Tier II & Tier III support, 25W output power, AES-256 encryption, and full/semi-duplex communication, it delivers secure, long-range, and efficient communication for mission-critical applications such as emergency services, transportation, and industrial operations.

KEY FEATURES

- 25W High Power Output for Extended Range
- DMR Tier II & Tier III Compatible
- Full / Semi-Duplex Communication
- AES-256 Secure Encryption
- GPS, Bluetooth & OTAP Support
- Emergency Alarm (SOS) & Lone Worker
- Large 2.8” HD TFT Display
- Scan & Priority Scan

SPECIFICATIONS

Display	2.8" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	1024
RF Power Output	25W
Channel Spacing	12.5 / 20 / 25 kHz
Operating Voltage	13.6V DC ±15%
Dimensions	174 × 190 × 60 mm
Weight	~1500 g
Audio Output Power	3W
GPS Accuracy	≤5 m
Protection Rating	IP54

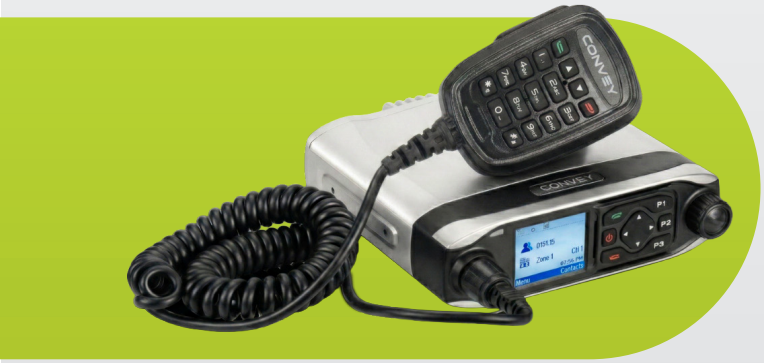

C1-DM4

Professional DMR Mobile Radio

DESCRIPTION

The C1-DM4 DMR Mobile/Base Radio is a reliable and efficient communication solution designed for vehicle-mounted and base station applications. Featuring DMR Tier II technology, 25W output power, AES-256 encryption, and GPS/GLONASS support, it ensures secure and dependable communication for transportation, logistics, and industrial operations.

KEY FEATURES

- 25W High Power Output for Long Range Communication
- DMR Tier II Digital Technology
- AES-256 Secure Encryption
- Semi-Duplex Communication
- GPS & Bluetooth Support (Optional
- Emergency Alarm (SOS) & Call Alert
- DTMF Microphone with Backlit Keypad
- Scan & Priority Scan

SPECIFICATIONS

Display	1.8" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	256
RF Power Output	25W
Channel Spacing	12.5 / 20 / 25 kHz
Operating Voltage	10.8V – 15.9V DC
Dimensions	151 × 149 × 47 mm
Weight	~1150 g
Audio Output Power	3W
GPS Accuracy	≤5 m
Protection Rating	IP54



C1-DM5

Professional DMR Mobile Radio

DESCRIPTION

The C1-DM5 DMR Mobile/Base Radio is an advanced and high-performance communication solution designed for demanding professional environments. With DMR Tier II & Tier III support, 25W output power, AES-256 encryption, and optional IP interconnection, it delivers secure, scalable, and long-range communication for transportation, industrial, and mission-critical operations.

KEY FEATURES

- 25W High Power Output for Extended Range
- DMR Tier II & Tier III Compatible
- Semi-Duplex Communication
- AES-256 Secure Encryption
- GPS, Bluetooth & IP Interconnection (Optional)
- Emergency Alarm (SOS) & Lone Worker
- DTMF Microphone with Backlit Keypad
- Scan & Priority Scan

SPECIFICATIONS

Display	1.7" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	1024
RF Power Output	25W
Channel Spacing	12.5 / 20 / 25 kHz
Operating Voltage	10.8V – 15.9V DC
Dimensions	183 × 166 × 57 mm
Weight	~1500 g
Audio Output Power	3W
GPS Accuracy	≤5 m
Protection Rating	IP54



C1-DR 800

Professional SFR & Ad-Hoc Repeater

DESCRIPTION

The C1-DR 800 SFR & Ad-Hoc Repeater is a powerful and intelligent communication solution designed to extend coverage in complex and challenging environments. Built with DMR Tier II & Tier III support, IP68 rugged protection, and advanced ad-hoc networking capabilities, it enables seamless multi-hop communication, making it ideal for emergency response, field operations, and large-area deployments.

KEY FEATURES

- Ad-Hoc Multi-Hop Networking (MANET Technology)
- High Power Output up to 50W
- DMR Tier II & Tier III Compatible
- IP68 Rugged & Military-Grade Protection
- AES-256 Secure Encryption
- Supports Chain, Star & Mesh Networking
- GPS & GLONASS Positioning Support
- Base Station & Repeater Mode Operation

SPECIFICATIONS

Display	2.8" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	1024
RF Power Output	5W / 10W / 25W / 50W
Channel Spacing	12.5 kHz
Power Supply	DC 13.6V ±15%, AC 140–240V
Dimensions	260 × 200 × 65 mm
Weight	~4500 g
Audio Output Power	2W
GPS Accuracy	≤5 m
Protection Rating	IP68

C1-DS 800

Professional Single-Frequency Repeater



DESCRIPTION

The C1-DS 800 Single-Frequency Repeater is a compact and portable communication solution designed to extend coverage efficiently in challenging environments. Supporting digital, analog, and trunking modes, along with single-frequency repeat capability, it enables seamless communication with minimal frequency usage. Its lightweight design and flexible networking make it ideal for emergency response, field operations, and rapid deployment scenarios.

KEY FEATURES

- Single-Frequency Repeater (SFR) Technology
- Semi-duplex / Single-Frequency Repeat Operating Mode
- Supports Analog, Digital & Trunking Modes
- 1024 Channel Capacity with Multi-Zone Support
- Compact & Portable Backpack Design
- AES Encryption & Secure Communication
- Built-in GPS Positioning
- Flexible Networking & Roaming Support
- Emergency Alarm, Monitoring & Lone Worker

SPECIFICATIONS

Display	1.77" TFT Color Display
Frequency Range	136–174 MHz / 400–470 MHz
Channels	1024
RF Power Output	5W / 25W
Channel Spacing	12.5 / 20 / 25 kHz
Operating Voltage	10.8V – 16.8V DC
Dimensions	174 × 190 × 60 mm
Weight	2.2 kg, 3.2 kg (with battery)
Audio Output Power	3W
GPS Accuracy	≤5 m
Protection Rating	IP54



C1-DR 8000

Flagship Infrastructure Repeater

DESCRIPTION

The C1-DR 8000 Ultra-Slim DMR Repeater is a high-performance, enterprise-grade communication solution designed for wide-area coverage and mission-critical operations. Featuring up to 50W transmit power, ultra-slim 1U rack design, and intelligent cooling system, it delivers stable, long-range, and reliable communication. With IP connectivity, GPS positioning, and backup power support, it is ideal for large-scale networks across industries and public safety applications.

KEY FEATURES

- Up to 50W High Power Output for Wide Coverage
- Ultra-Slim 1U Rack-Mount Design
- DMR Tier II Compatible with IP Connect Support
- Smart IP Connect & Simulcast Capability (Optional)
- Advanced Cooling System for Continuous Operation
- Dual Power Supply (Main + Backup with Floating Charge)
- Malfunction Warning & Monitoring System
- GPS Satellite Positioning (Optional)

SPECIFICATIONS

Frequency Range	136–174 MHz / 400–470 MHz
Channels	99
RF Power Output	50W
Channel Spacing	12.5 / 25 kHz
Power Supply	85–264 VAC / 10.8 to 15.8 VDC
Dimensions (HWD)	434 × 309 × 44 mm
Antenna Impedance	50Ω
Frequency Stability	±0.5 ppm (±0.02 ppm with GPS)
Sensitivity	≤0.35 µV (3% BER)
Operating Temp.	-30°C to +60°C



C1-DR 8001

Standard Infrastructure Repeater

DESCRIPTION

The C1-DR 8001 DMR Repeater is a professional-grade communication solution designed for reliable and continuous operation in enterprise and industrial environments. With its 1U rack-mounted design, 50W high power output, IP multi-site connectivity, and smart analog-digital auto detection, it ensures seamless communication and efficient network integration for wide-area coverage.

KEY FEATURES

- 1U Professional Rack-Mount Design
- Up to 50W High Power Output
- DMR Tier II with Tier III Upgrade Ready
- IP Multi-Site Connectivity
- Smart Analog-Digital Auto Detection
- Integrated AC & DC Power Supply (Auto Switch)
- 100% Duty Cycle for Continuous Operation
- Remote Monitoring & Status Check

SPECIFICATIONS

Frequency Range	136–174 MHz / 400–470 MHz
Channels	64
RF Power Output	40W (UHF) / 50W (VHF)
Channel Spacing	12.5 / 25 kHz
Operating Voltage	100–260 VAC / 10.8 to 15.8 VDC
Dimensions (HWD)	482.6 × 450 × 44 mm
Antenna Impedance	50Ω
Weight	~11.2 kg
Duty Cycle	100%
Sensitivity	0.20 µV (Analog & Digital)
Operating Temp.	-30°C to +60°C



C1-DR 8002

Smart Multi-Site DMR Repeater

DESCRIPTION

The C1-DR8002 Professional DMR Repeater is a robust and high-efficiency communication infrastructure solution designed for enterprise and mission-critical operations. Featuring 50W transmit power, IP multi-site connectivity, GPS positioning, and integrated AC/DC power backup, it ensures reliable, uninterrupted, and scalable communication coverage across large operational areas.

KEY FEATURES

- 1U Professional Rack-Mount Design
- 50W High Power Output
- DMR Tier III Ready (Software Upgrade)
- IP Multi-Site Connectivity
- Integrated AC & DC Power Supply with Auto Switching
- GPS Positioning & Simulcast Broadcast Support
- Remote Monitoring & Status Check
- 100% Duty Cycle for Continuous Operation

SPECIFICATIONS

Frequency Range	136–174 MHz / 400–470 MHz
Channels	99
RF Power Output	50W
Channel Spacing	12.5 / 25 kHz
Power Supply	100–260VAC / 13.6V ±15%VDC
Dimensions (HWD)	482.6 × 450 × 44 mm
Antenna Impedance	50Ω
Weight	~11.2 kg
Frequency Stability	±0.5 ppm
Sensitivity	0.20 µV (Analog & Digital)
Operating Temp.	-30°C to +60°C



C1-DR 8003

Mixed-Mode Infrastructure Repeater

DESCRIPTION

The C1-DR8003 Professional DMR Repeater is a high-performance communication infrastructure solution designed for continuous and reliable operation in enterprise and mission-critical environments. Featuring 50W transmit power, IP multi-site connectivity, GPS positioning, and analog/digital mixed mode operation, it ensures seamless communication, wide-area coverage, and enhanced operational efficiency.

KEY FEATURES

- 1U Professional Rack-Mount Design
- 50W High Power Output
- Analog, Digital & Mixed Mode Operation
- 1.8" Alphanumeric TFT Display
- DMR Tier III Ready (Software Upgrade)
- IP Multi-Site Connectivity
- Integrated AC & DC Power Supply with Auto Switching
- Remote Monitoring & GPS Positioning

SPECIFICATIONS

Frequency Range	136–174 MHz / 400–470 MHz
Channels	128
RF Power Output	50W (VHF/UHF)
Channel Spacing	12.5 / 25 kHz
Operating Voltage	100–260VAC / 10.8 to 15.9 VDC
Dimensions (HWD)	483 × 375 × 44 mm
Antenna Impedance	50Ω
Weight	~7.6 kg
Duty Cycle	100%
Display	1.8" Alphanumeric TFT
Sensitivity	0.20 µV (Analog & Digital)
Operating Temp.	-30°C to +60°C

CONVEY

Reliable Digital Communication

Website
www.conveyindia.in

Email
sales@conveyindia.in

Phone
+91-11-26472000 | +91-8416902121

Address
DTJ 505-506 5th floor,
DLF Tower B, Jasola, New Delhi, Delhi-110025.

"Engineered for Clear Communication"