CUSTOMER APPROVED (ALL PAGE):		CUSTOMER REQUIREMENT:	

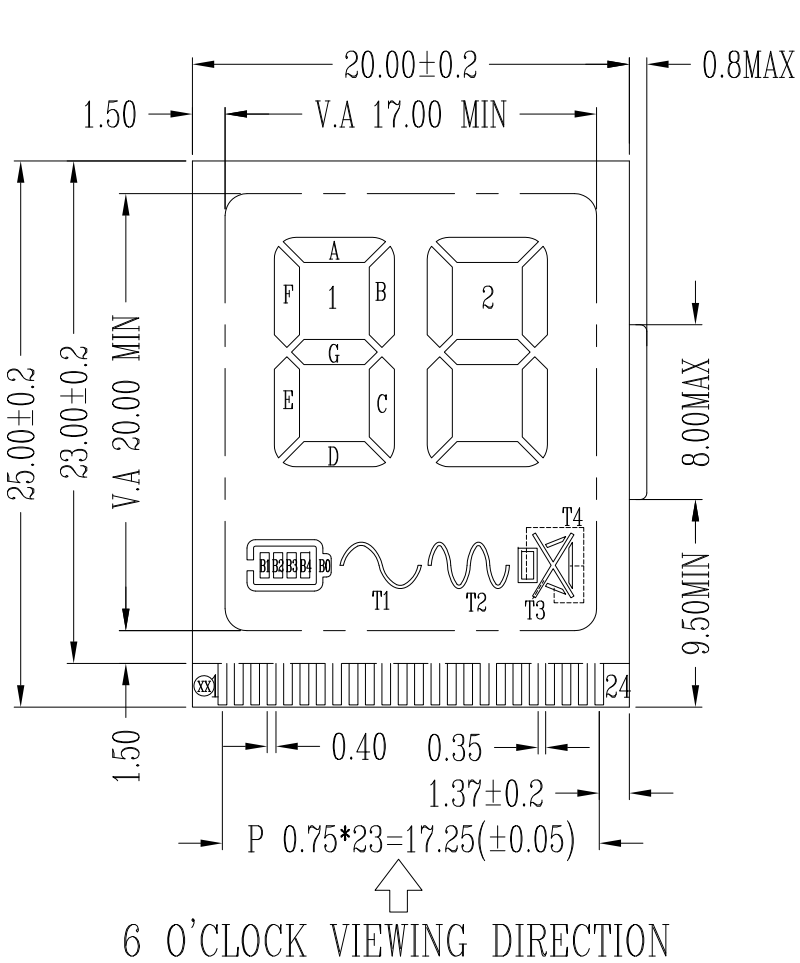

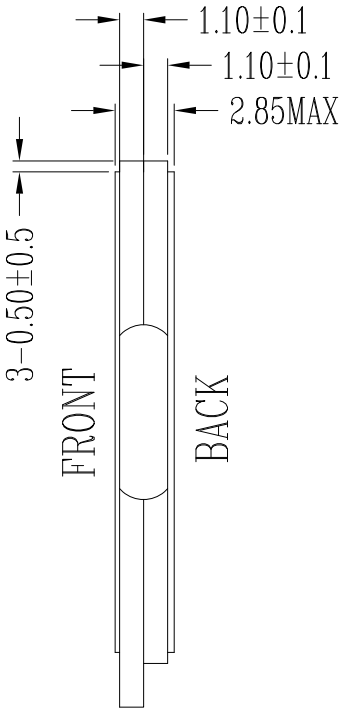

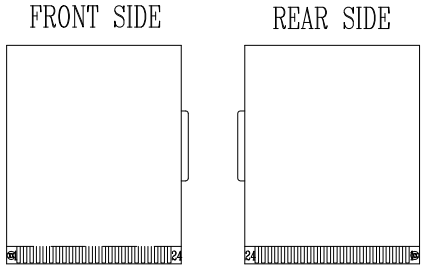

BLUE Line marking on LCD protective film
LCD保护膜表面需划蓝线

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM	COM	1E	1D	1C	B4	B3	B1	B2	B0	T1	T2	T4	T3	2E	2D	2C	2G	2B	2A	2F	1G	1B	1A	1F

NOTES :

1 DISPLAY TYPE : TN
2 VIEWING DIRECTION : 6 O'CLOCK
3 POLARIZER MODE : TRANSFLECTIVE/POSITIVE
4 DRIVE CONDITION : STATIC 64HZ
5 OPERATING VOLTAGE : 3.3V
6 OPERATING TEMP : -10°C~+60°C
7 STORAGE TEMP : -20°C~+70°C
8 CONNECTION : ZEBRA

NO.	CONTENT	DATE
	AMEND	
A	NEW	2018.04.30

APPROVALS		DATE
APP		
CHK		
DWN		19.04.30

PROJECTION

YG01-0012-112N-51

19-424

VERSION A | UNIT: MM | NO.1/4