
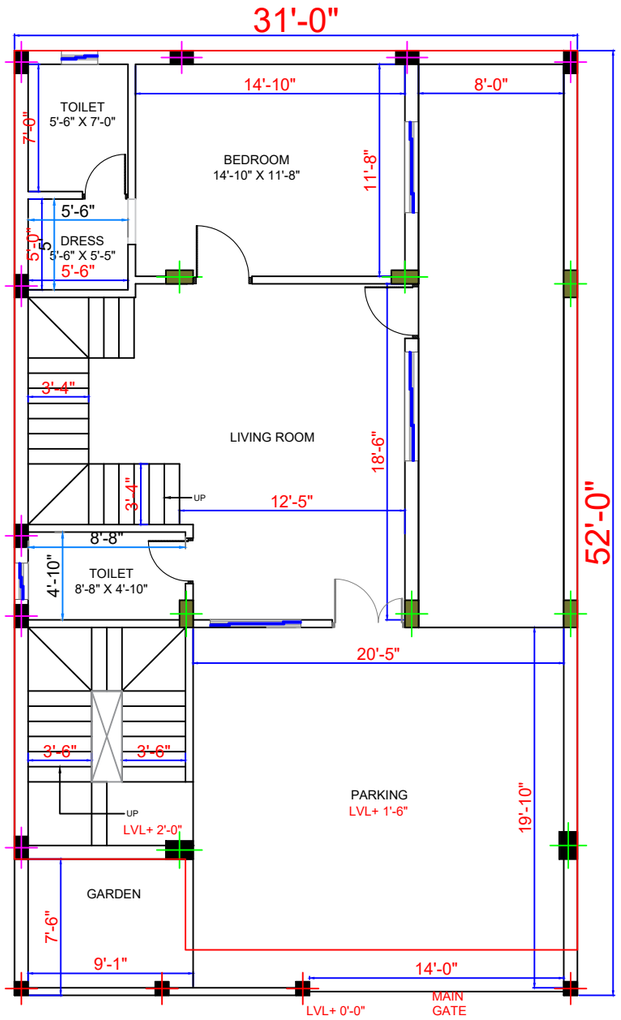


ROAD

GROUND FLOOR PLAN


SLAB AREA = 1487.00 SQ. FT.

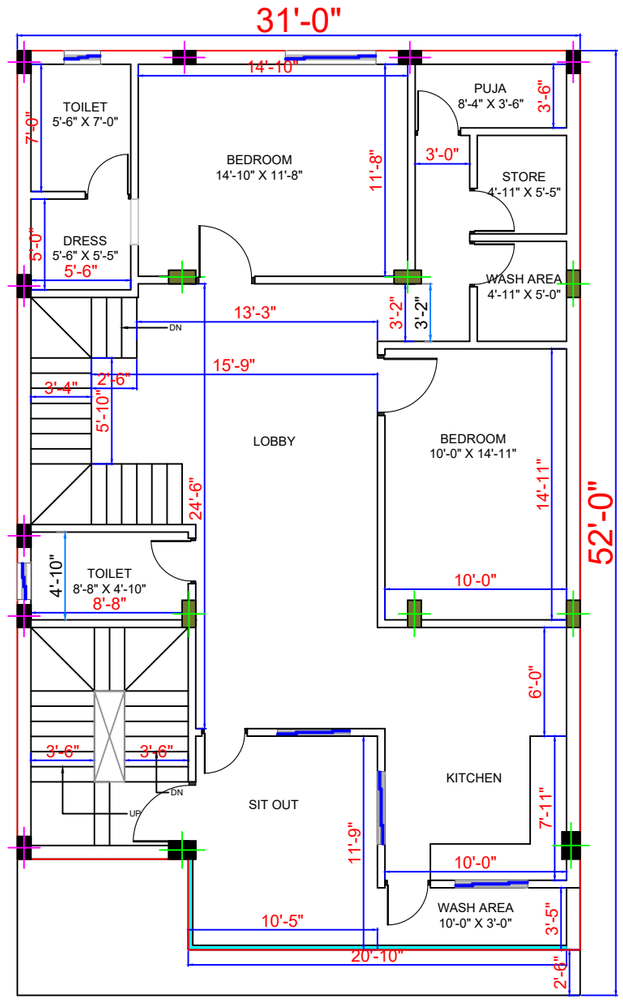

ROAD

FIRST FLOOR PLAN

SLAB AREA = 1487.00 SQ. FT.

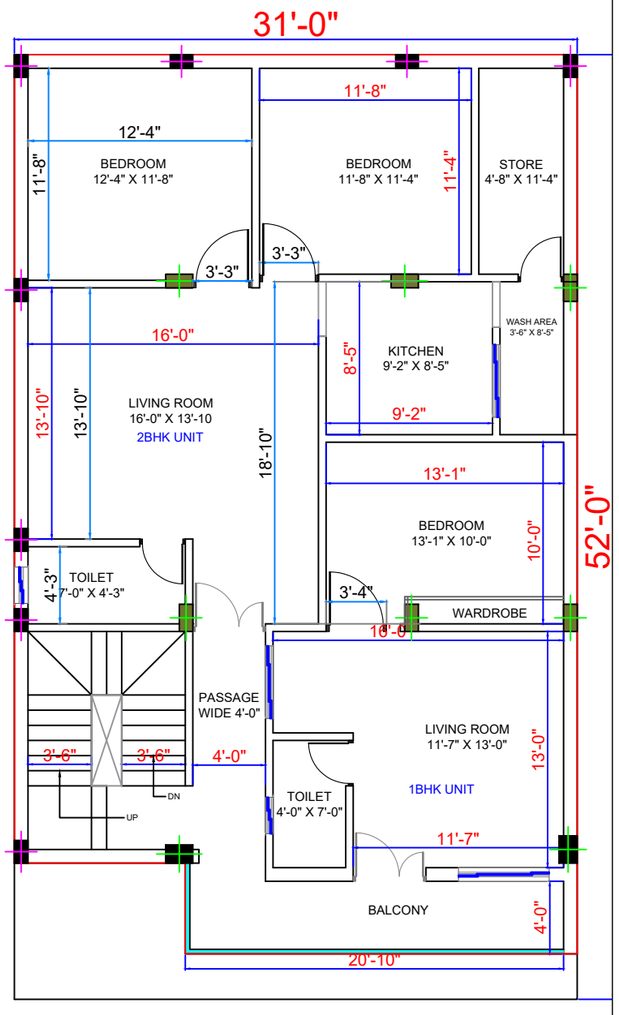

ROAD

TYPICAL 2 FLOOR PLAN

SLAB AREA = 1487.00 SQ. FT.


DESIGN DETAILS

1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.


2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.



PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	1.Column plan
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

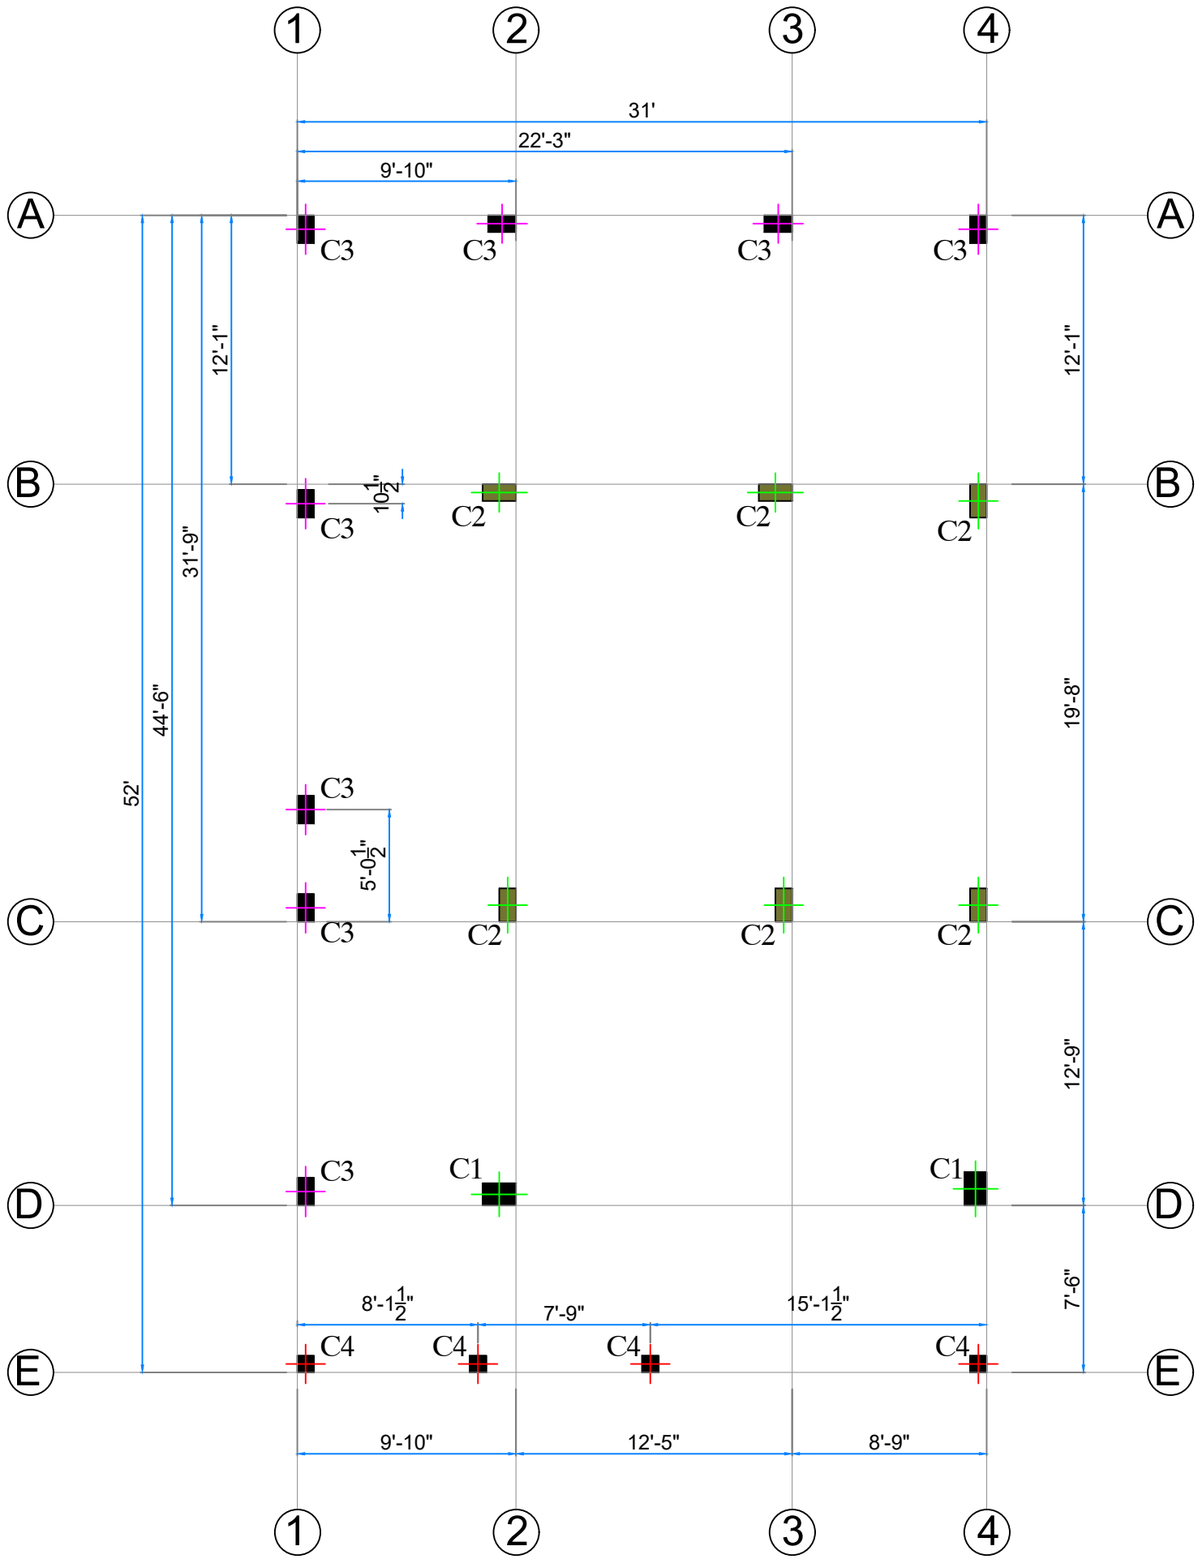

---ROAD---
COLUMN CENTERLINE PLAN


DESIGN DETAILS

1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.


2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.



PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	2.Column centerline plan
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

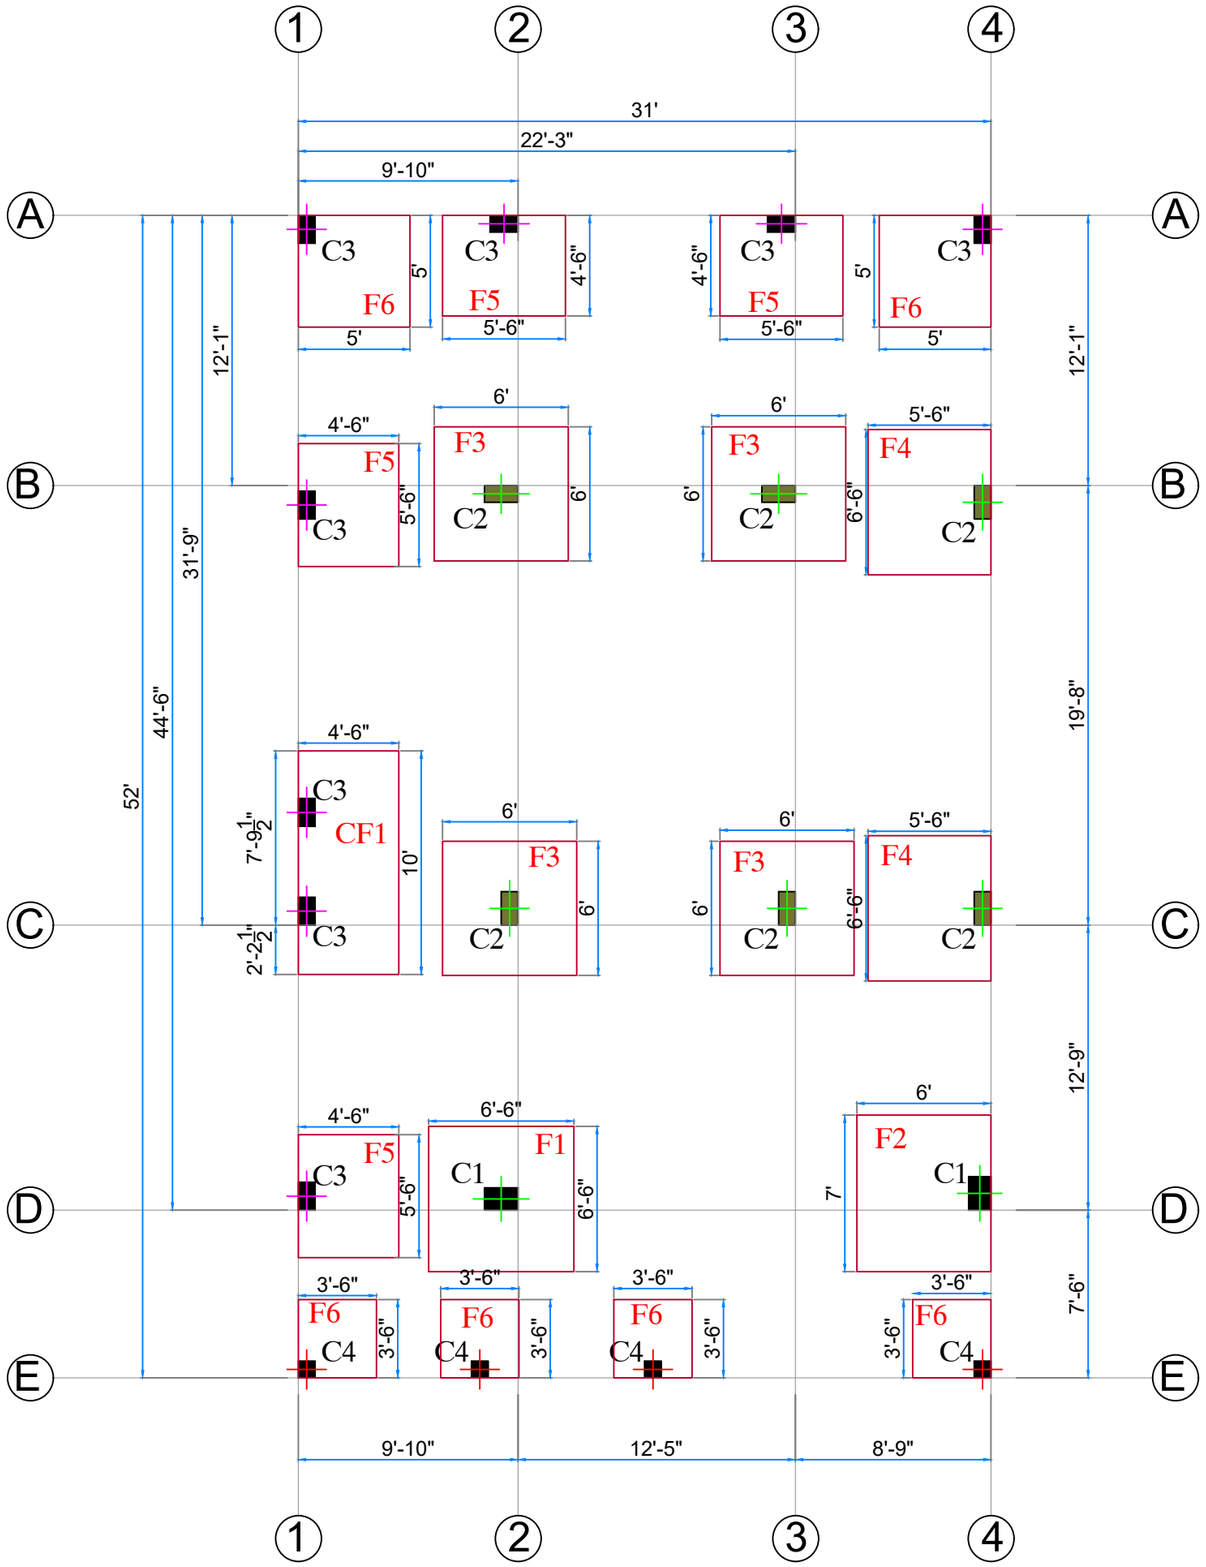

---ROAD---

FOUNDATION PLAN

DESIGN DETAILS







1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.

PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	3.FOUNDATION PLAN
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

SCHEDULE OF COLUMN

TYPE	SIZE	MAIN BAR	RINGS	SECTION
C1	12" x 18"	• 10 NOS 16 mm TMT	 8 TMT @ 6" C/C RING (THREE RING)	
C2	9" x 18"	• 8 NOS 16 mm TMT	 8 TMT @ 6" C/C (DOUBLE RING)	
C3	9" x 15"	• 4 NOS 16 mm TMT ◦ 4 NOS 12 mm TMT	 8 TMT @ 6" C/C (DOUBLE RING)	
C4	9" x 9"	◦ 4 NOS 12 mm TMT	 8 TMT @ 7" C/C RING	

SCHEDULE OF REINFORCEMENT FOR FOOTINGS

TYPE	L (IN)	B (IN)	D (IN)	REINFORCEMENT IN L DIRECTION	REINFORCEMENT IN B DIRECTION
F1	AS IN FOUNDATION PLAN		2'-0"	12 TMT 5" C/C	12 TMT 5" C/C
F2	AS IN FOUNDATION PLAN		1'-10"	12 TMT 5" C/C	12 TMT 5" C/C
F3	AS IN FOUNDATION PLAN		1'-10"	12 TMT 5" C/C	12 TMT 5" C/C
F4	AS IN FOUNDATION PLAN		1'-10"	12 TMT 5" C/C	12 TMT 5" C/C
F5	AS IN FOUNDATION PLAN		1'-10"	12 TMT 5" C/C	12 TMT 5" C/C
F6	AS IN FOUNDATION PLAN		12"	10 TMT 5" C/C	10 TMT 5" C/C
CF1	AS IN FOUNDATION PLAN		1'-10"	12 TMT 5" C/C	12 TMT 5" C/C

Note: The depth of foundation will be according to the site conditions.


DESIGN DETAILS

1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.


2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.




PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	4.Foundation/Column Schedule
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu





PLAN


TYPICAL FOOTING DETAIL OF COLUMN

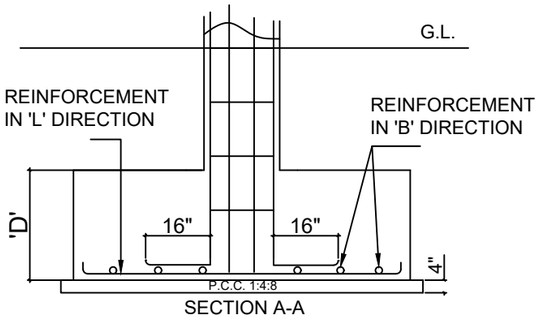

SECTION A-A

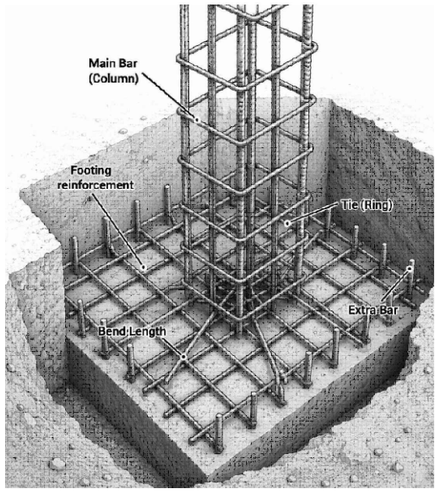


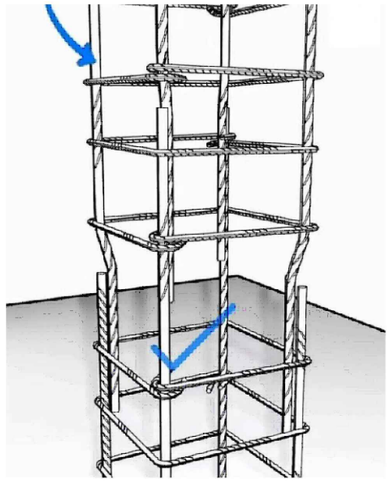




PLAN

TYPICAL FOOTING DETAIL OF CORNER WALL COLUMNS

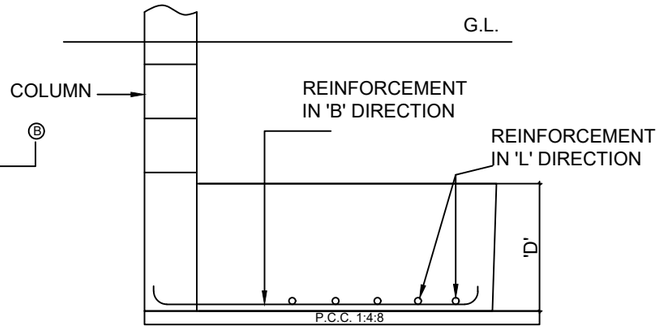


SECTION B-B




PLAN

TYPICAL FOOTING DETAIL OF CORNER WALL COLUMNS

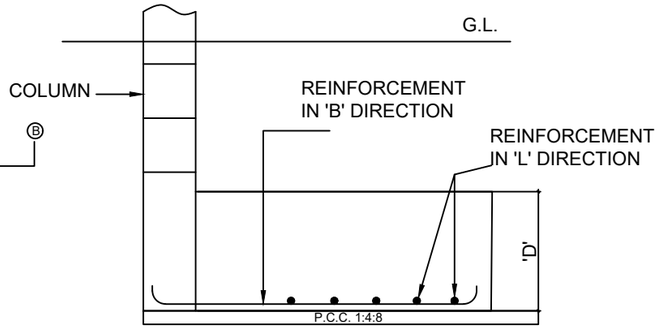


SECTION B-B

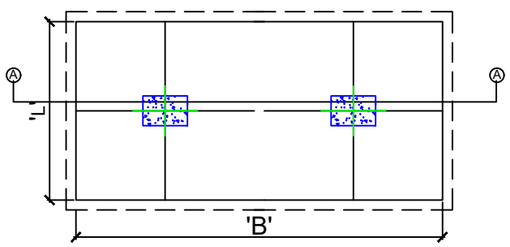

PLAN

TYPICAL DETAIL OF COMBINED FOOTING OF COLUMN

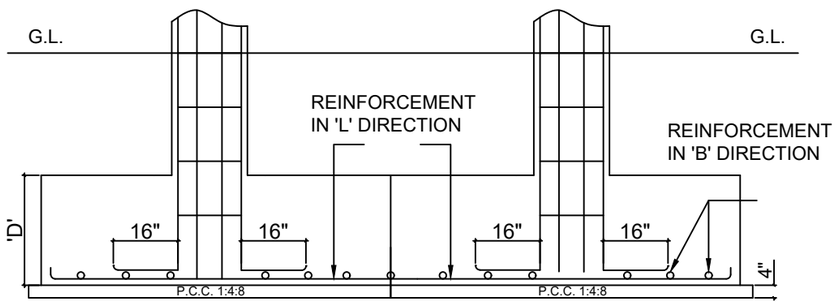

SECTION A-A

DESIGN DETAILS

1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm


Grade Rcc of concrete is M-20.

2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.


PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	5.Foundation Section Details
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

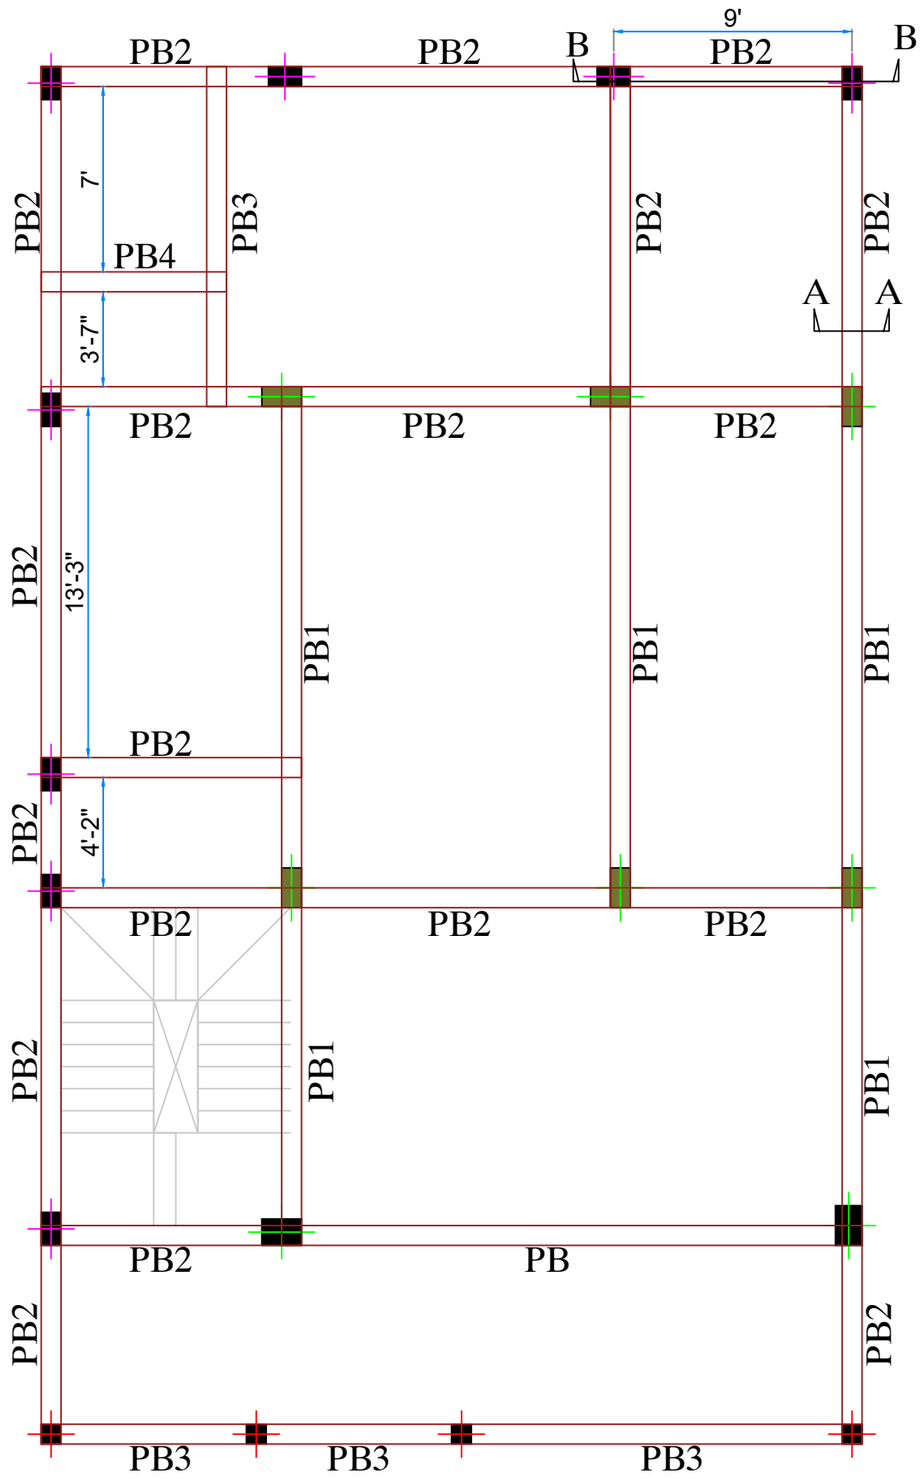



SCHEDULE OF PLINTH BEAM

NAME	SIZE (IN)	REIN. AT TOP	REIN. AT BOTTOM	EXTRA AT BOTTOM	EXTRA AT TOP	RINGS	
						UP TO L/3	AFTER L/3
PB	9" x 18"	3-16 TMT	3-16 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C
PB1	9" x 18"	2-16 TMT	2-16 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C
PB2	9" x 15"	2-12 TMT	2-12 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C
PB3	9" x 15"	2-12 TMT	2-12 TMT	2-10 TMT	2-10 TMT	8 # @ 5" C/C	8 # @ 6" C/C
PB4	9" x 15"	2-12 TMT	2-12 TMT	-	-	8 # @ 5" C/C	8 # @ 6" C/C
GB	9" x 15"	2-12 TMT	2-12 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C


Ground beam will be provided only when the difference between the plinth level and the natural ground level (NGL) is more than 4 feet. Otherwise, ground beam will not be required .

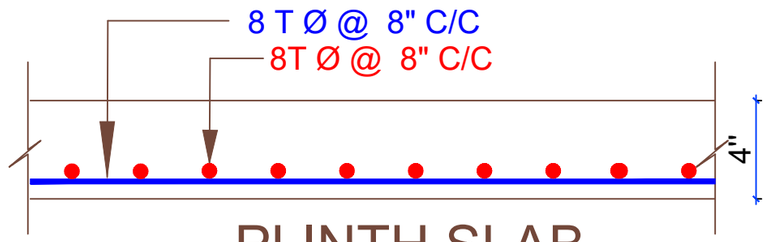

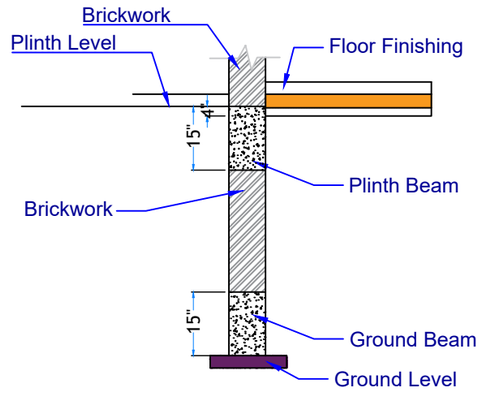

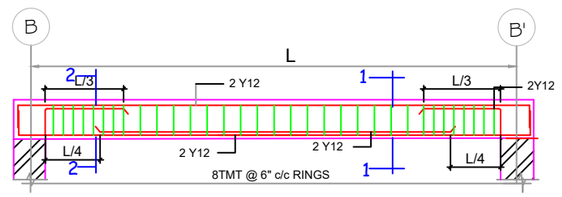

BEAM SECTION B-B'



DESIGN DETAILS


1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.

2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE


Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.

PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	7a.PLINTH BEAM Details
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

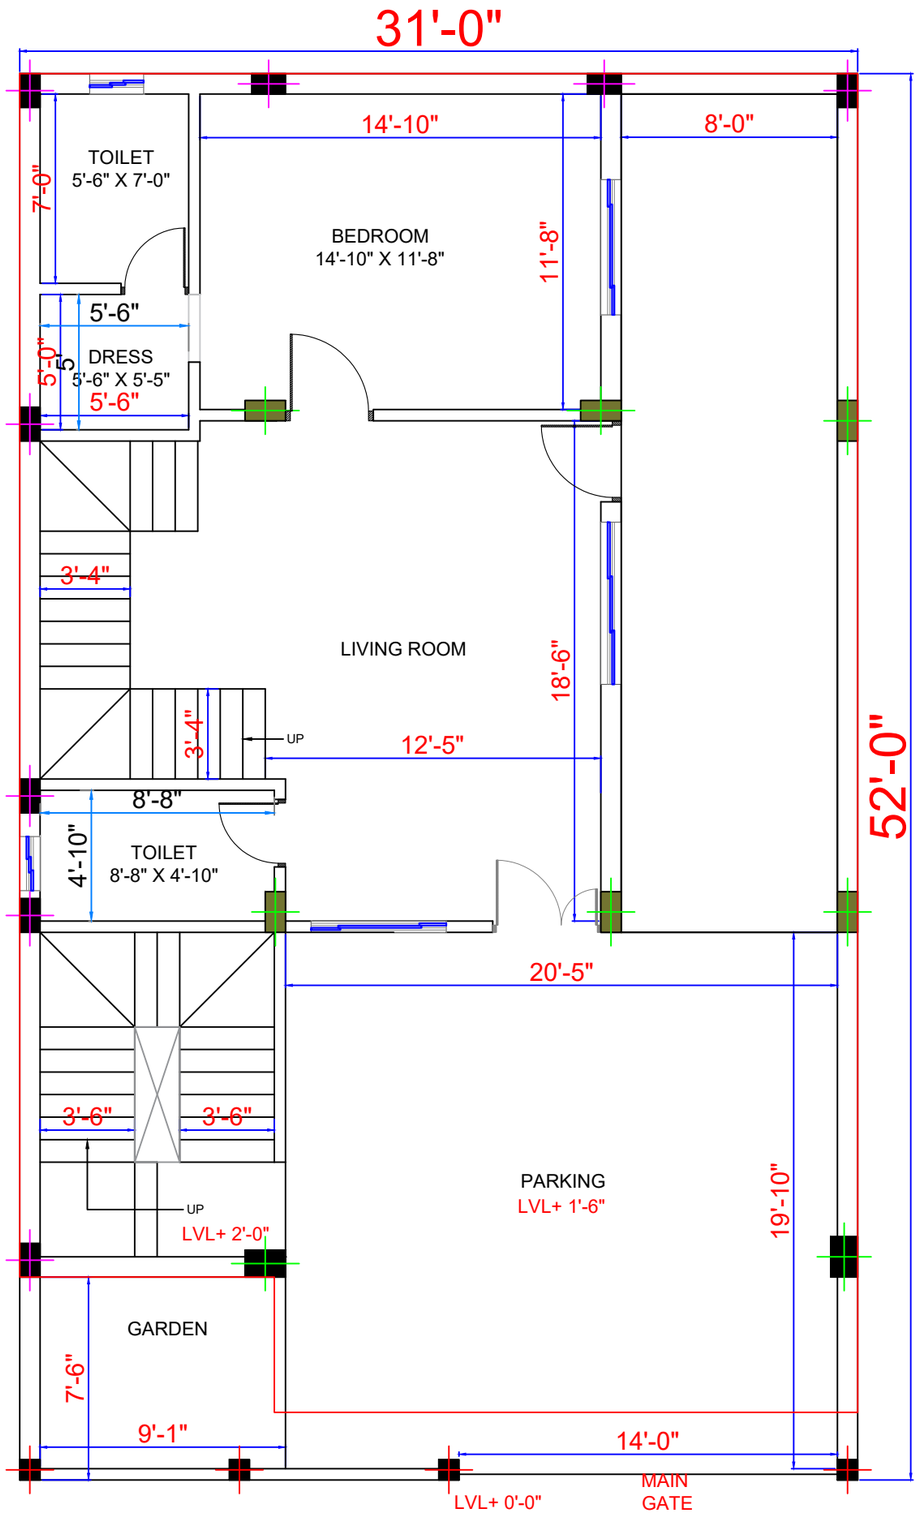

GROUND FLOOR PLAN

SLAB AREA = 1487.00 SQ. FT.

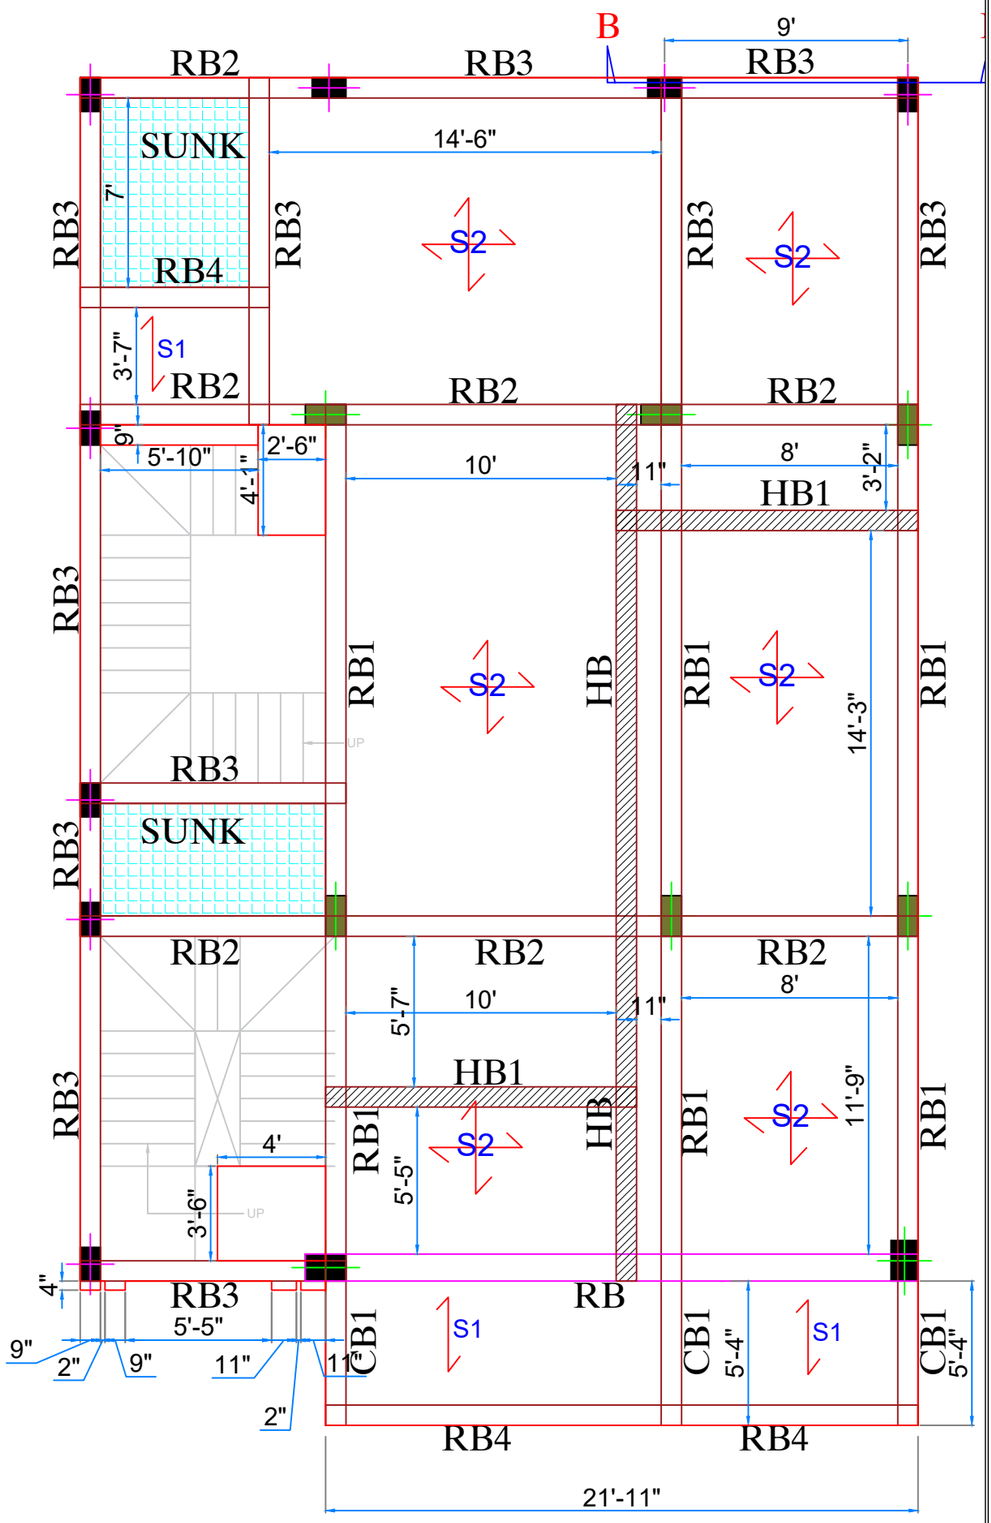

GROUND FLOOR ROOF BEAM SLAB PLAN

DESIGN DETAILS


1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.

2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.


PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	8B.ROOF BEAM PLAN
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

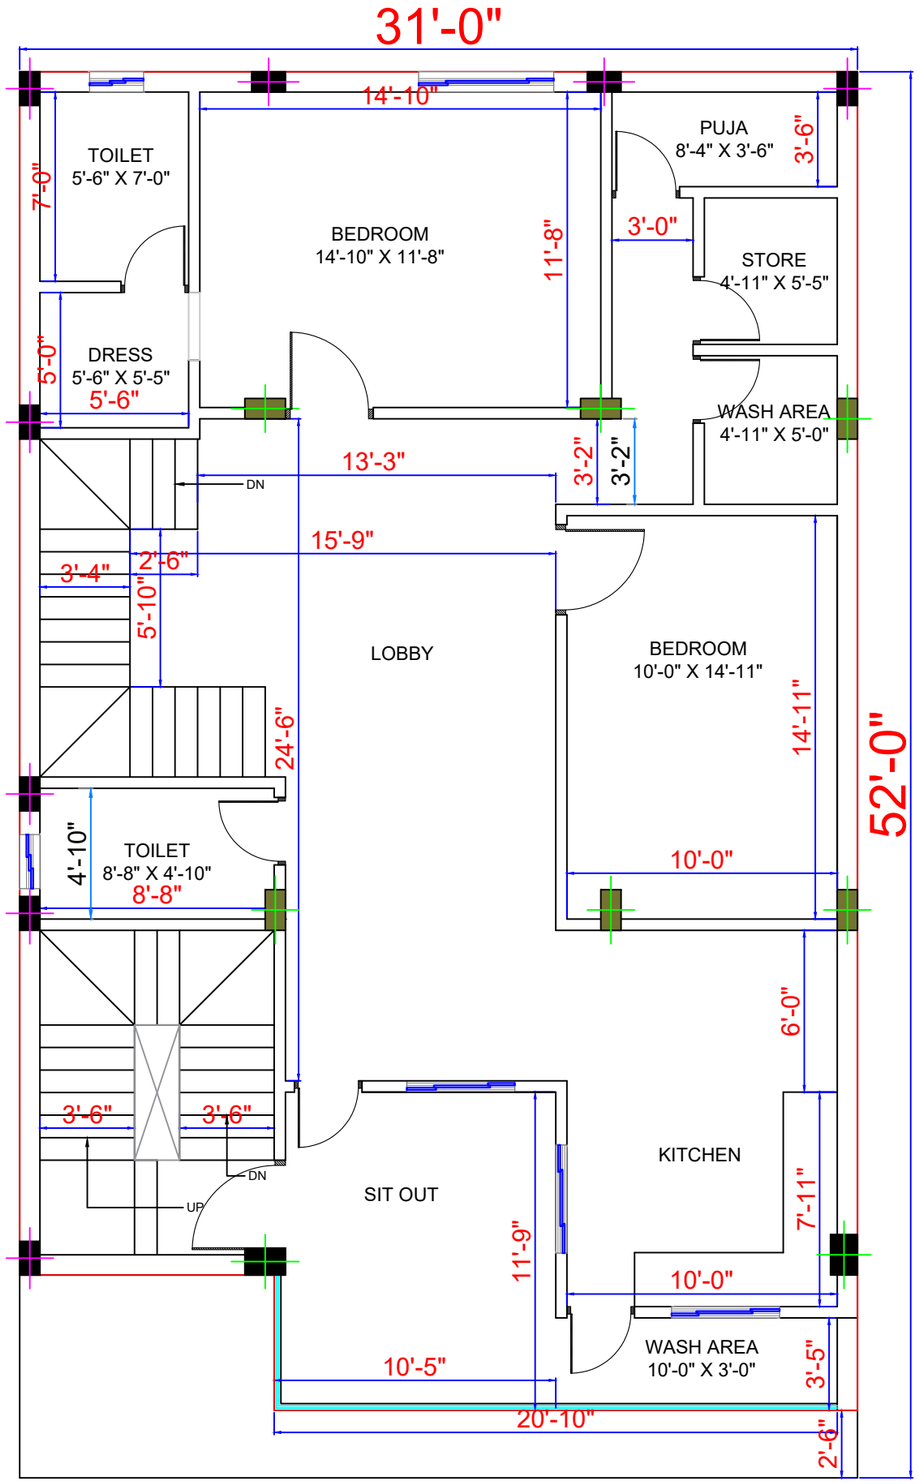

ROAD

FIRST FLOOR PLAN

SLAB AREA = 1487.00 SQ. FT.

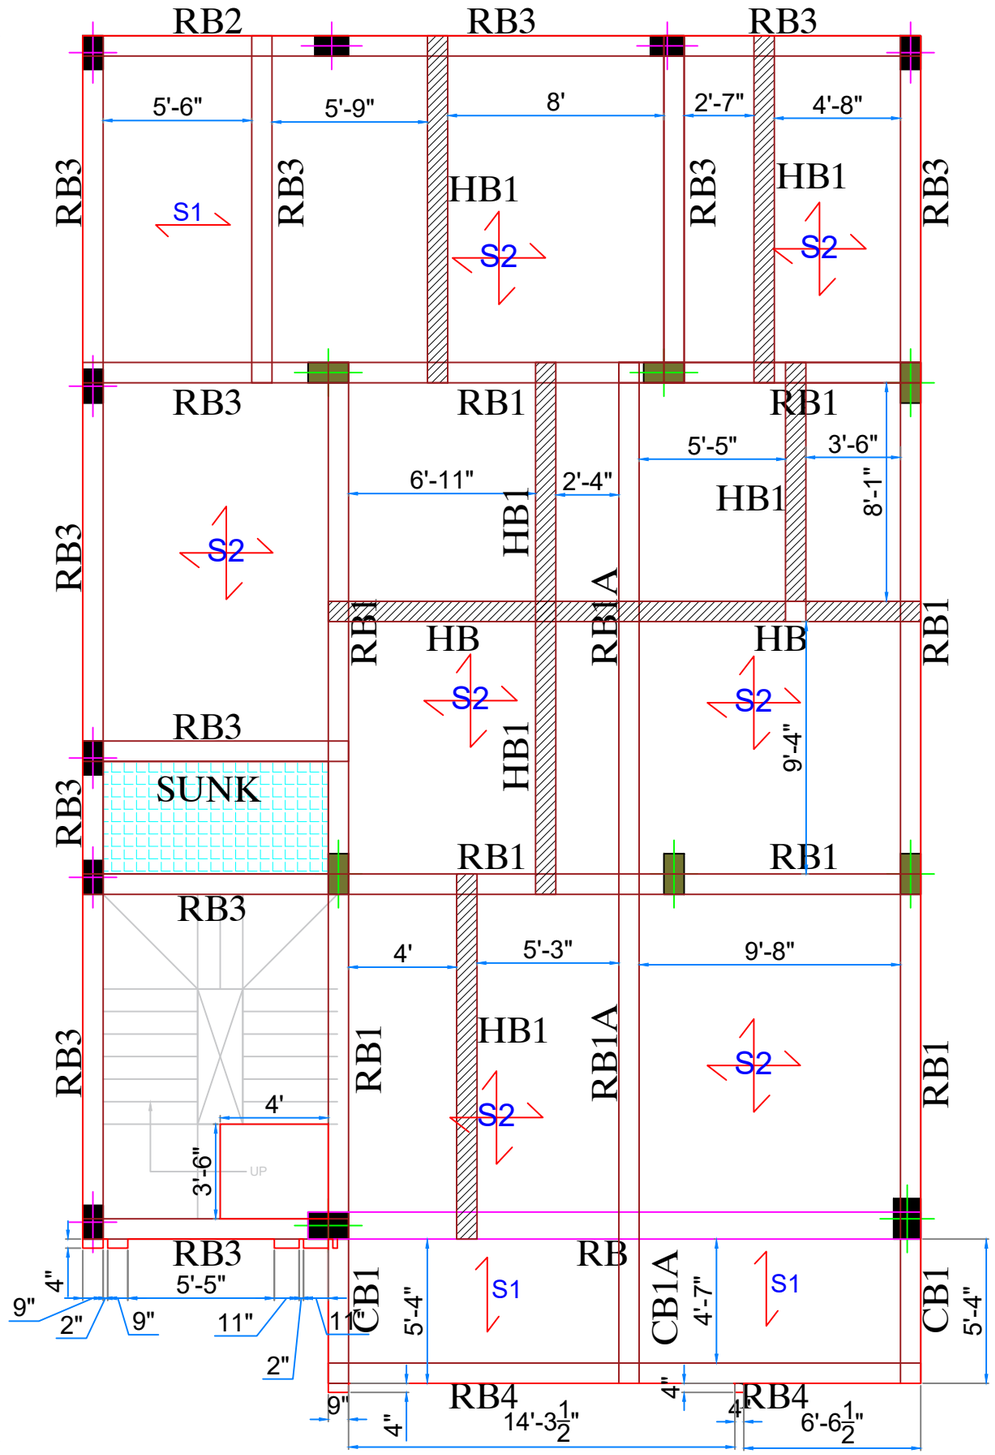

FIRST FLOOR ROOF BEAM SLAB PLAN


DESIGN DETAILS

1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE


Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.

PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	8B.ROOF BEAM PLAN
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

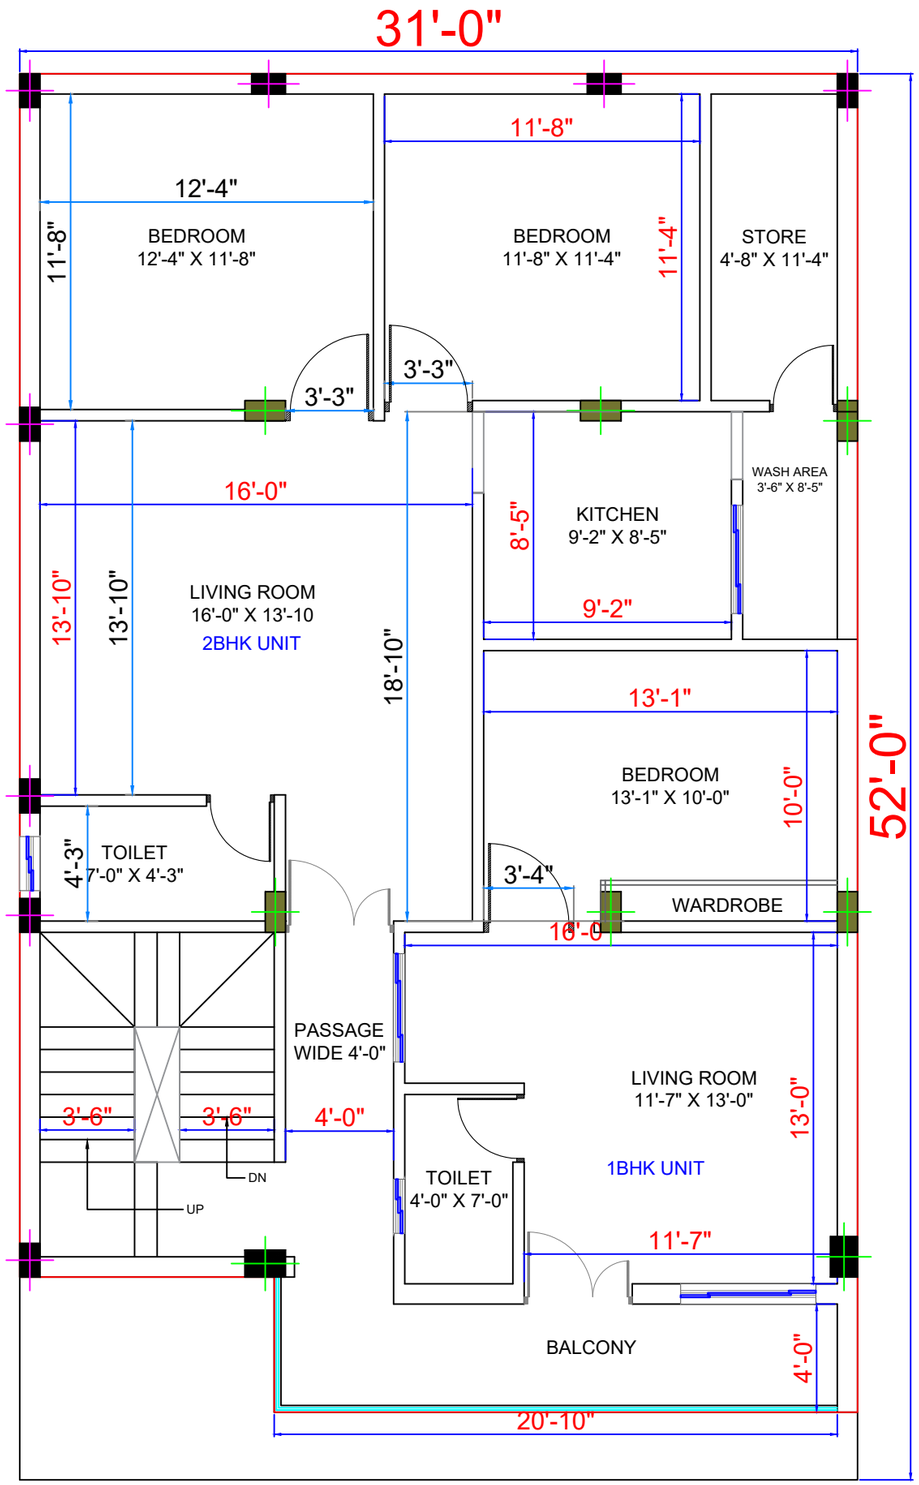

TYPICAL 2 FLOOR PLAN

SLAB AREA = 1487.00 SQ. FT.

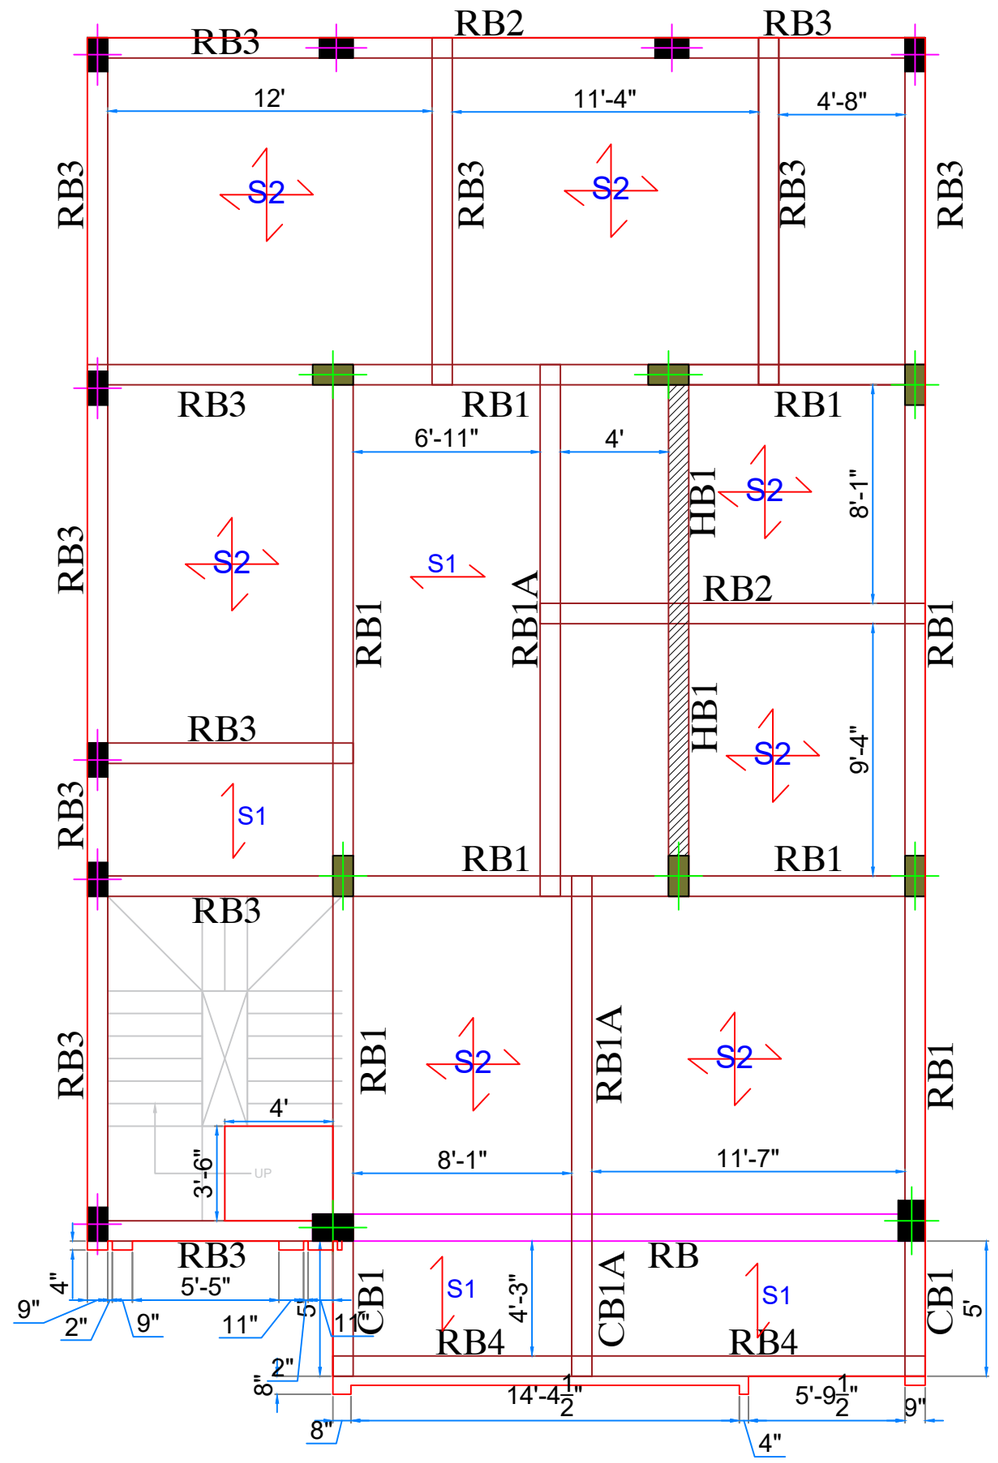

TYPICAL 2 **FLOOR ROOF BEAM SLAB PLAN**

DESIGN DETAILS

1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.

PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	8B.ROOF BEAM PLAN
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

SCHEDULE OF ROOF BEAM

NAME	SIZE (IN) THICKNESSXDEPTH	REIN. AT TOP	REIN. AT BOTTOM	EXTRA AT BOTTOM	EXTRA AT TOP	RINGS	
						UP TO L/3	AFTER L/3
RB	12" x 18"	4-16 TMT	4-16 TMT	2-16 TMT	2-16 TMT	8 # @ 5" C/C	8 # @ 6" C/C
RB1	9" x 18"	3-16 TMT	3-16 TMT	2-16 TMT	2-16 TMT	8 # @ 5" C/C	8 # @ 6" C/C
RB1A	9" x 18"	2-16 TMT	3-16 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C
RB2	9" x 15"	2-12 TMT	3-12 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C
RB3	9" x 15"	2-12 TMT	2-12 TMT	2-12 TMT	2-12 TMT	8 # @ 5" C/C	8 # @ 6" C/C
RB4	9" x 18"	3-12 TMT	3-12 TMT	-	-	8 # @ 5" C/C	8 # @ 6" C/C
CB1	9" x 18"	3-16 TMT	3-16 TMT	-	2-16 TMT	8 # @ 4" C/C	8 # @ 5" C/C
CB1A	9" x 18"	2-16 TMT	3-16 TMT	-	2-12 TMT	8 # @ 4" C/C	8 # @ 5" C/C
HB	9" x 5"	2-16 TMT	2-16 TMT	-	-	8 # @ 5" C/C	8 # @ 6" C/C
HB1	9" x 5"	2-12 TMT	2-12 TMT	-	-	8 # @ 5" C/C	8 # @ 6" C/C

SLAB DETAILS


Slab No.	THK. (IN)	SHORT SPAN	LONG SPAN	REMARK
S1	5"	10 Ø @ 6" C/C	8 Ø @ 6" C/C	One Way
S2	5"	10 Ø @ 6" C/C	10 Ø @ 6" C/C	Two Way

DESIGN DETAILS


1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE


Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.



PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	9A.ROOF BEAM SCHEDULE
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

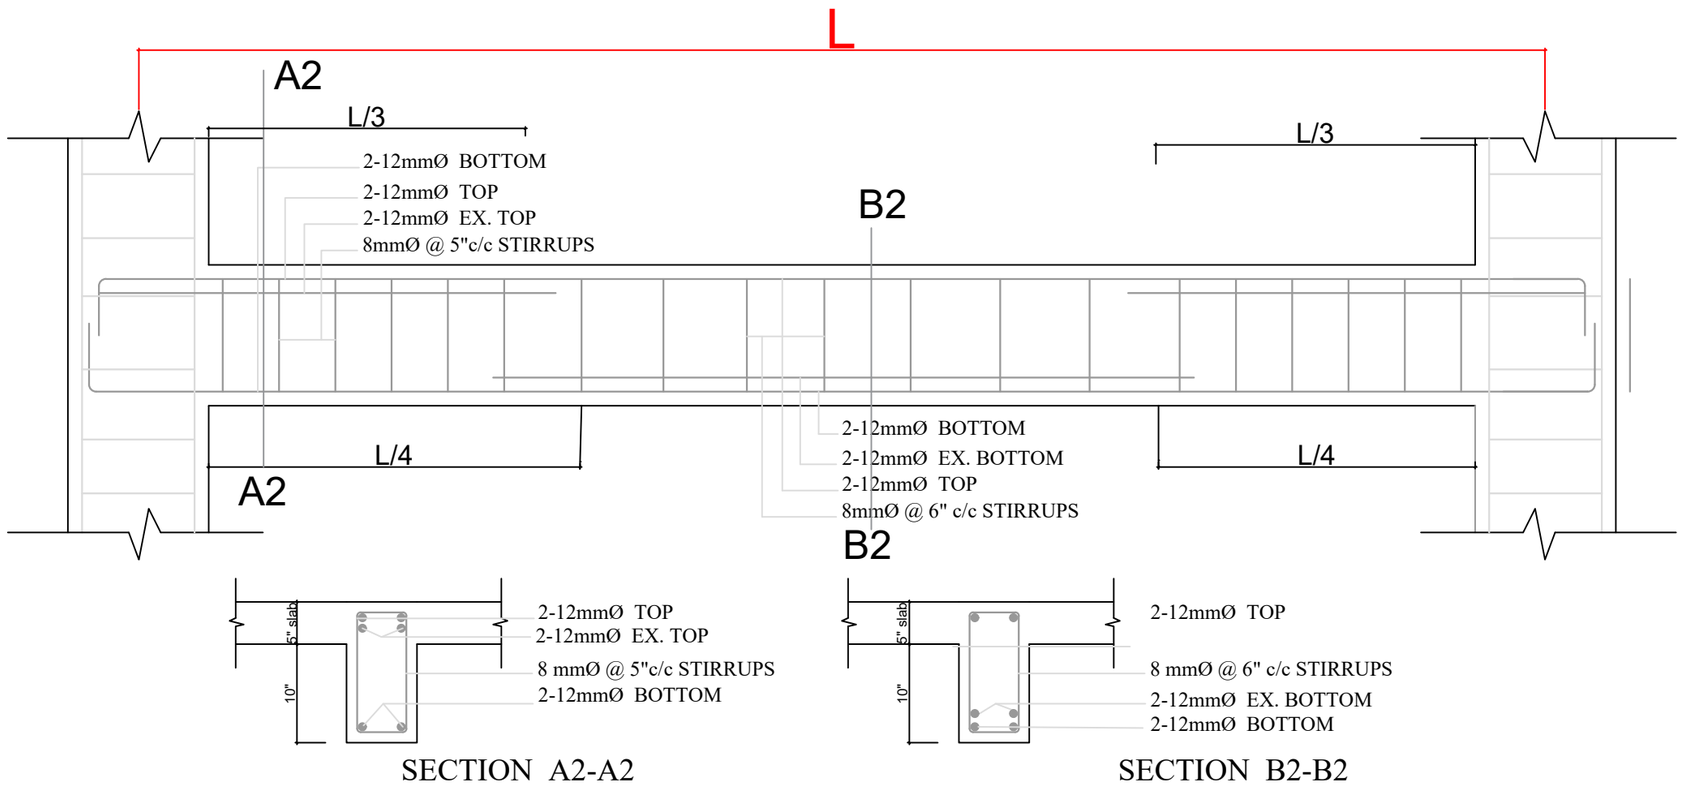

TYPICAL PLAN AND SECTION B-B'

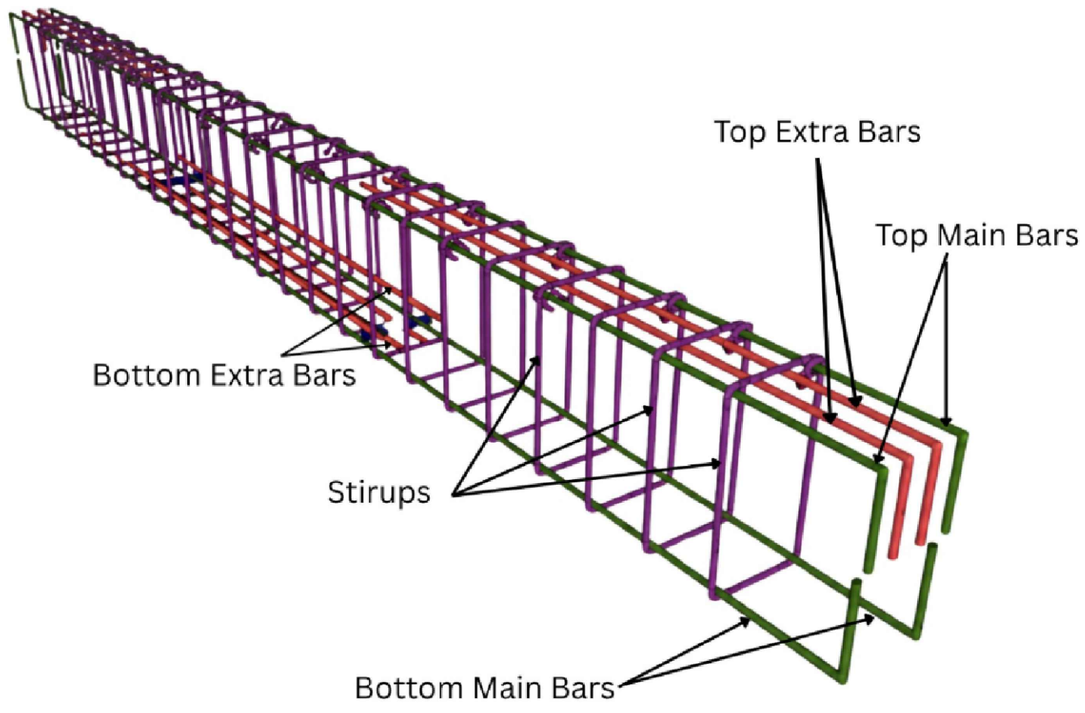


DESIGN DETAILS

1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.


2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE


Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.




PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	9.ROOF BEAM SCHEDULE AND SECTION
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

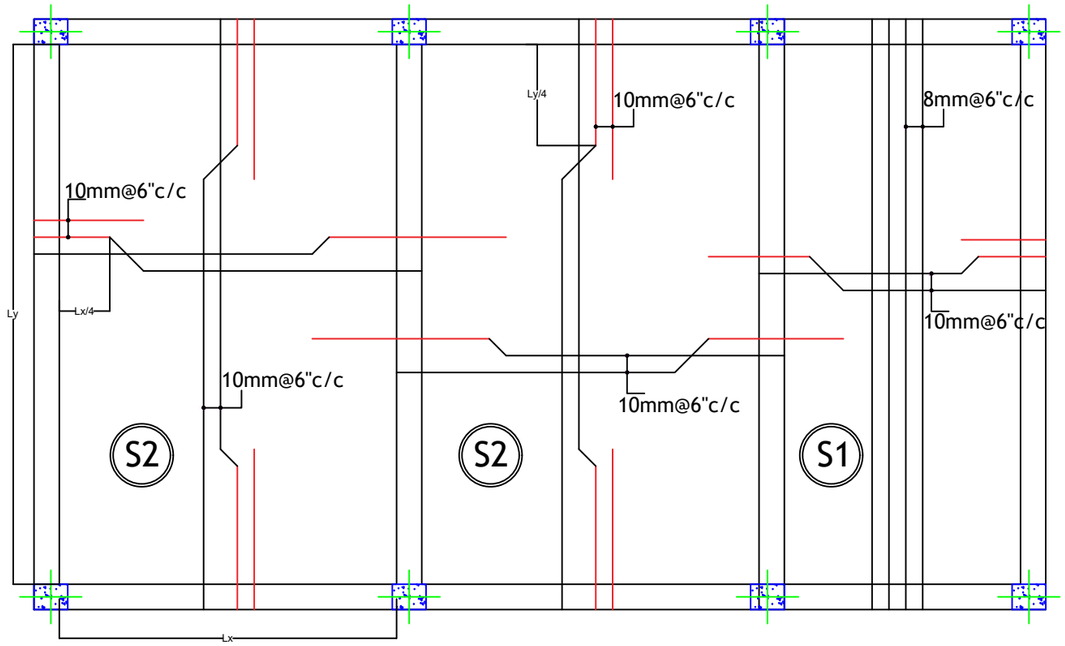


TYPICAL SECTION VIEW OF SLAB PANEL

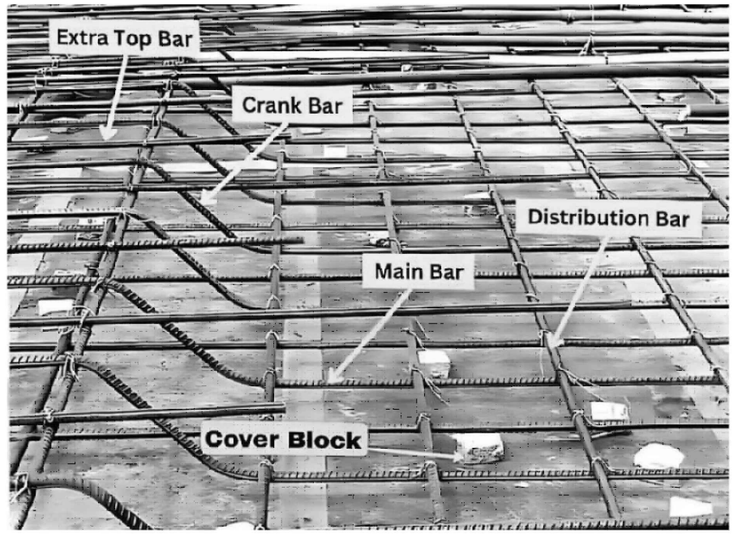

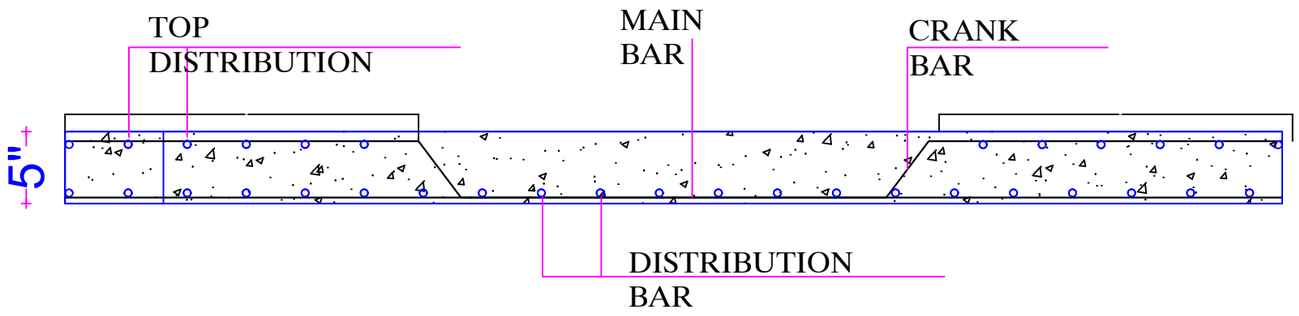

TYPICAL SECTION VIEW OF SLAB PANEL

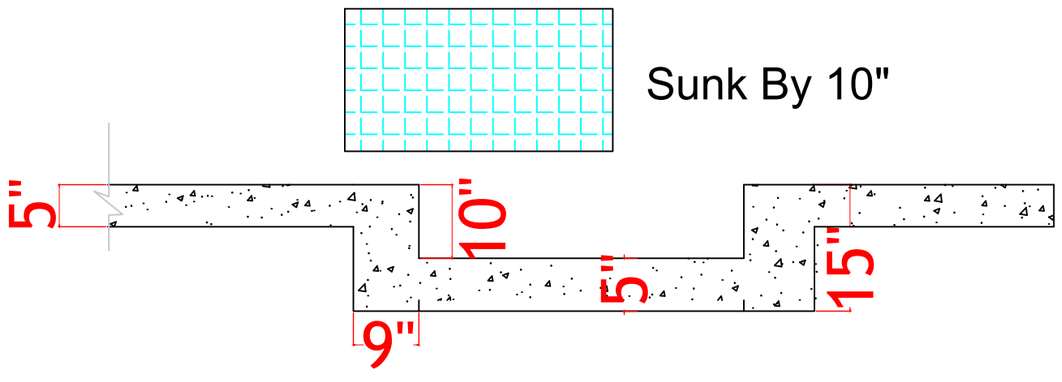


SUNKEN SLAB AT BEAM BOTTOM

DESIGN DETAILS


1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .


NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.




PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	10.SLAB PLAN AND SECTION
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

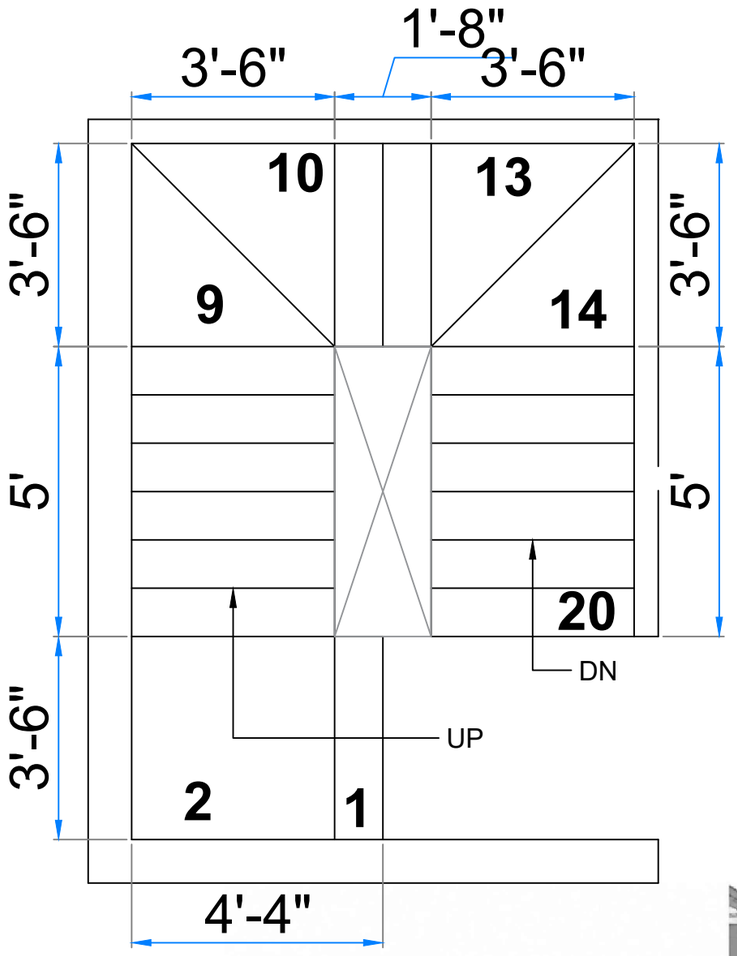

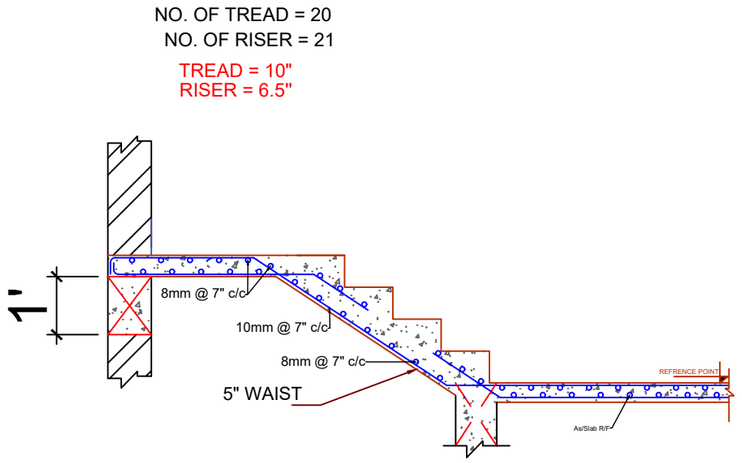

TYPICAL WAIST STAIRCASE RCC DETAILS

HEIGHT 11'- 0" + 5" SLAB = 11'-5"

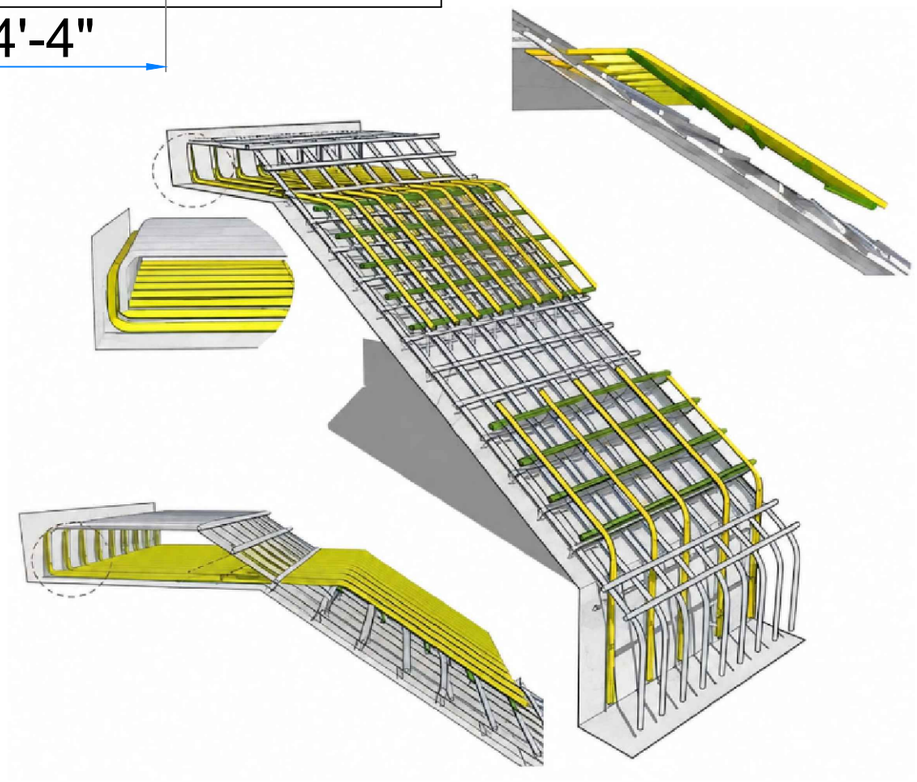


DESIGN DETAILS


1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .


NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.




PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	11.STAIRCASE DETAIL
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

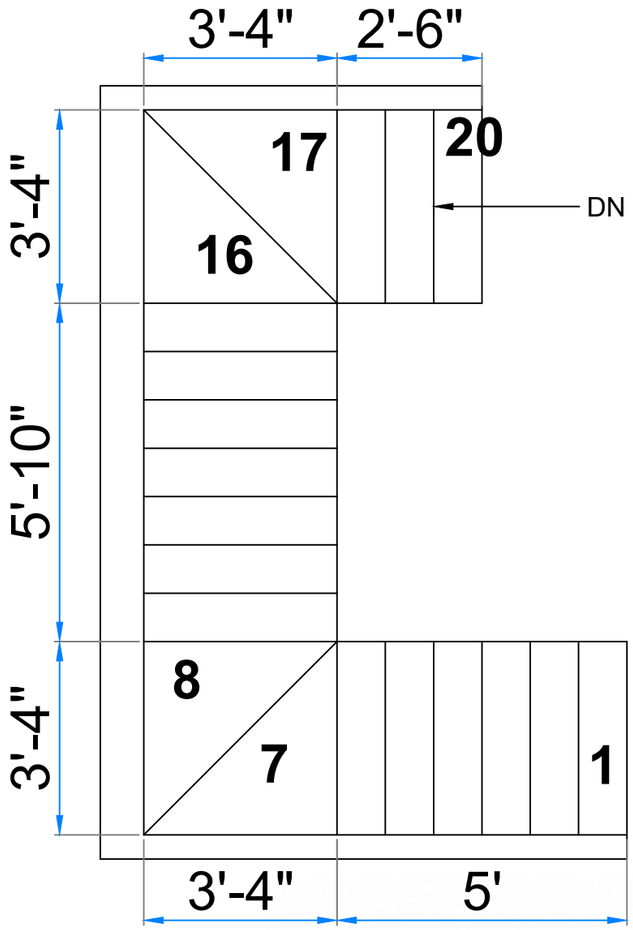

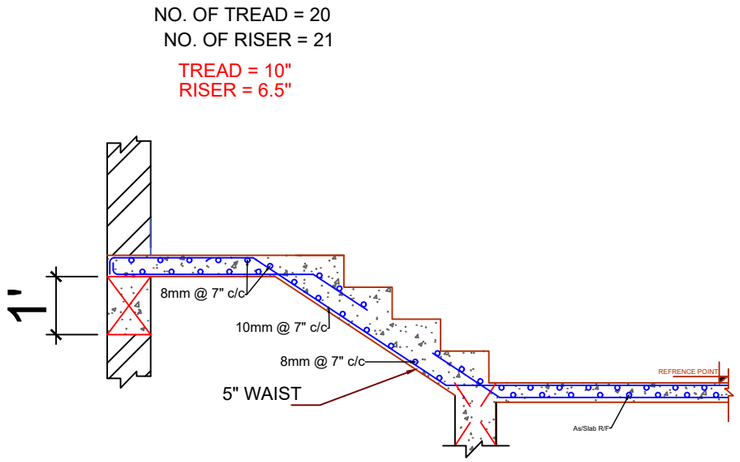

TYPICAL WAIST STAIRCASE RCC DETAILS

HEIGHT 11'- 0" + 5" SLAB = 11'-5"

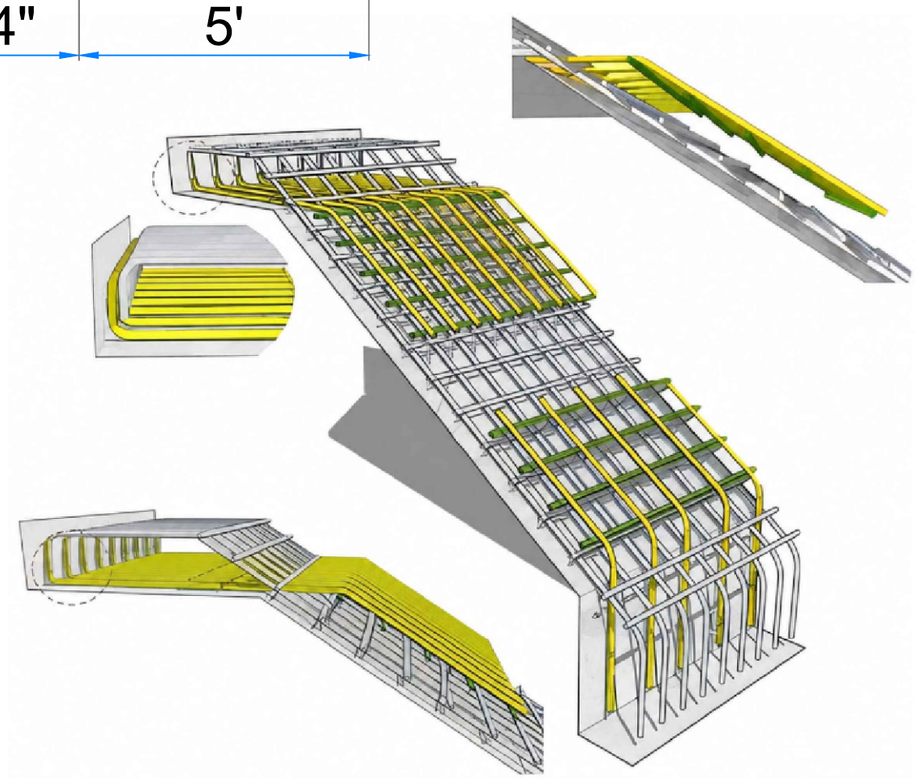

DESIGN DETAILS


1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.

PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	11.STAIRCASE DETAIL
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

LINTEL DETAILS

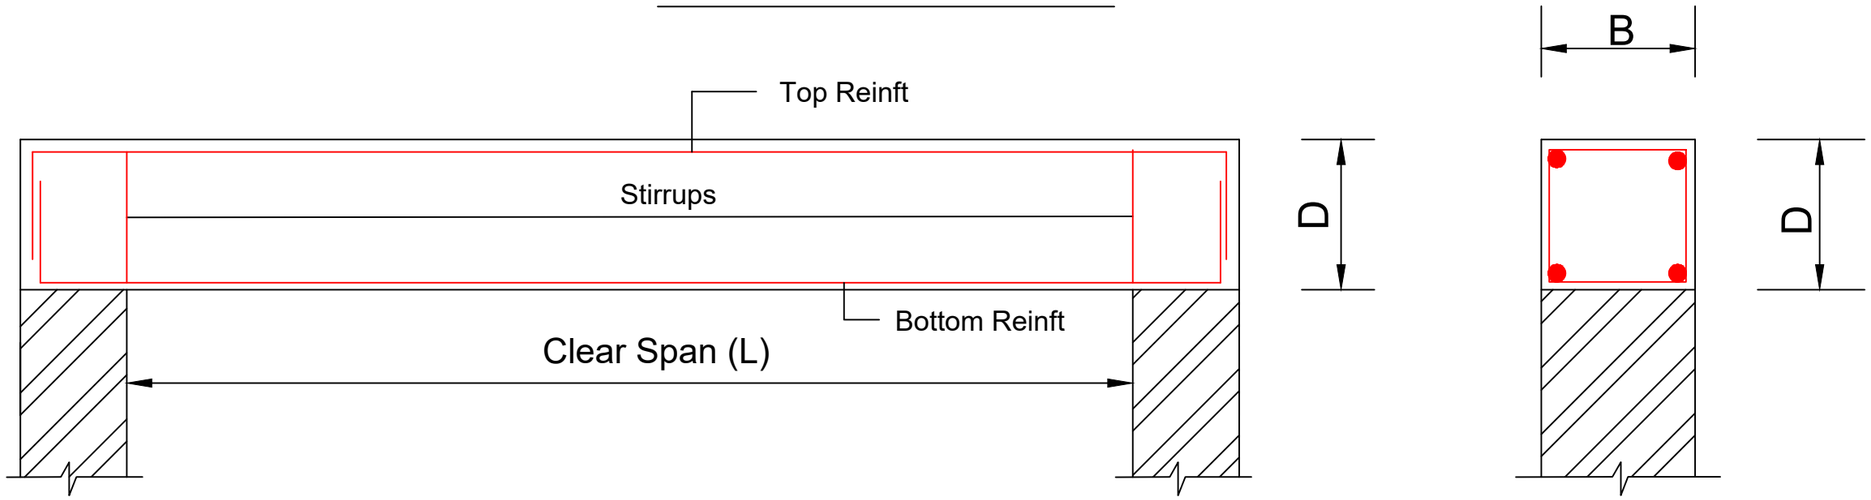

Clear Span (L) (in)	Breadth(B) (in)	Depth(D) (in)	Top Reinft	Bottom Reinft	Links/ Stirrups
3'	9"/5"	4"-5"	2 NOS 10 TMT	2 NOS 10 TMT	8MM RINGS - @ 150MM c/c
3' - 6'	9"/5"	5"	2 NOS 12 TMT	2 NOS 12 TMT	8MM RINGS - @ 150MM c/c
6' - 12'	9"/5"	6"	2 NOS 12 TMT	2 NOS 12 TMT	8MM RINGS - @ 150MM c/c
12' - 14'	9"/5"	7"	3 NOS 12 TMT	3 NOS 12 TMT	8MM RINGS - @ 150MM c/c

NOTE: LINTEL WILL BE AT 7' TO 8' HEIGHT ON ALL THE WALLS AS PER NEED

NOTE: IF WALL BREADTH IS 9" THAN 9" WILL BE THE BREADTH OF LINTEL BEAM AND IF WALL BREADTH IS 5" THAN BREADTH OF LINTEL BEAM WILL BE 5".


DESIGN DETAILS

1.CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.

2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.



PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	12.LINTEL DETAIL
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu

#. CONCRETE.

AS PER IS 456 : 2000

IS 456-2000 CODE FOR PCC AND RCC .

THE MAXI. SIZES OF AGGREGATE USED IN RCC IS LIMITED TO 20 MM

HOWEVER 10 mm ,15 mm are also used, in some expectations 25 mm is also used .

#. REINFORCING STEEL

1. AS PER IS 800-2007
2. REINFORCEMENT SHALL BE USED TMT BARS .
3. TMT Bars - Thermo-Mechanical Treated Bars STEEL
4. TMT BAR GRADE Fe-500, Fe-550D OR HIGHER GRADE STEEL.
5. TMT steel bars from different brands like TATA, Jindal, JSW and more

#. TWO LAYERS OF BITUMENOUS PAPER TO BE PROVIDED ON SUPPORTS UNDER SLABS, BEAMS AND LINTELS.

#. STRUCTURE DRAWINGS ARE DESIGN ACCORDING TO IS CODE .

.LAPPING LENGTH SHOULD BE PROVIDED 48D -50D (D-DIA OF BAR) ,

#. MINIMUM SPACING BETWEEN LONGITUDINAL BARS SHOULD BE 2 INCHES OR 50 MM .

NOTE- **Types of Formwork** (Formwork removal time after casting of Concrete)

1. Vertical Formwork of Column, beam, and wall - 16 Hours to 24 hours
2. Props removal for beams and arches
#. Span length up to 6m -14 Days
#. Span length beyond 6m -21 Days
3. Props removal for slab
#. Span length up to 4.5m -7 days
#. Span length beyond 4.5m -14 days

NOTE- **Curing Time For :**


1. PCC (Plain Cement Concrete) - 14 days
2. RCC (Reinforced Cement Concrete) :- 10 days
3. FLOORING :- 10 days
4. Plastering & Pointing : - 7 days
5. Brick & Stone Work :- 7 days

DESIGN DETAILS

1. CLEAR COVER TO REINFORCEMENT FOR FOOTINGS 40 mm, COLUMNS 25 mm, BEAMS 25 mm, SLAB 20 mm Grade Rcc of concrete is M-20.
2. Reinforcement steel to be used is a IS1786 and grade of steel should be Fe -500 or Higher.
3. All the precautions such as Water cement ratio and workability of the concrete should be ensured at the site.
4. The lap length of 50D should be ensured
5. The plinth beam should be tested or pedestal only
6. The plinth beam should be in perfect horizontal beam .

NOTE

Though the structural design was prepared as per room dimension it is important to check the center lines with respect to sizes of rooms before proceeding for excavation.



PROJECT :	Proposed Residential Layout For Mr Indrajeet Sir
TITLE :	13.CONTRACTOR NOTES
Date of Issue	Sep 21, 2026
CHECKED By	Er FAiz
Drawn By	Er Priyanshu