

# Enhanced Performance Measurement and Liveness Monitoring in Segment Routing Networks

*draft-gandhi-spring-sr-enhanced-plm-01*

*Rakesh Gandhi - Cisco Systems ([rgandhi@cisco.com](mailto:rgandhi@cisco.com)) - Presenter*

*Clarence Filsfils - Cisco Systems ([cfilsfil@cisco.com](mailto:cfilsfil@cisco.com))*

*Navin Vaghamshi - Reliance ([Navin.Vaghamshi@ril.com](mailto:Navin.Vaghamshi@ril.com))*

*Moses Nagarajah - Telstra ([Moses.Nagarajah@team.telstra.com](mailto:Moses.Nagarajah@team.telstra.com))*

# Agenda

- Requirements and Scope
- Summary
- Next Steps

# Requirements and Scope

## Requirements:

- Performance Delay Measurement & Liveness Monitoring in SR networks
  - ✓ End-to-end P2P/P2MP SR paths
  - ✓ Applicable to SR-MPLS/SRv6 data planes
  - ✓ Support ECMP SR paths
- Running single protocol for liveness detection and performance measurement in SR networks
  - ✓ Simplify deployment and reduce operational complexity
- No endpoint dependency
  - ✓ Stateless on endpoint (e.g. endpoint unaware of the probe protocol)
  - ✓ Higher scale and faster detection interval (e.g. packets not punted out of fast-path)


## Scope:

- RFC 5357 (TWAMP Light) defined probe messages
- RFC 8762 (STAMP) defined probe messages
- User-configured IP/UDP path for probe messages

# History of the Draft


- March 2020
  - Draft was published
- April 2020
  - Presented *version 00* in IETF MPLS WG Virtual Meeting

# Liveness and Performance Monitoring of SR Policy

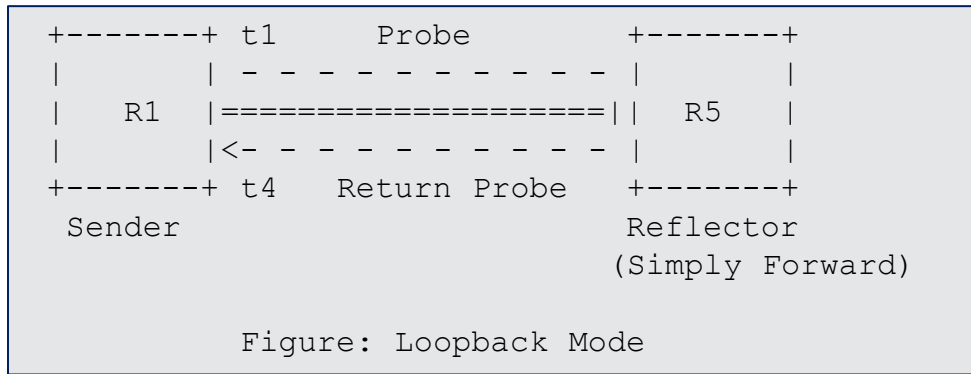

- Use PM probes (TWAMP Light/STAMP delay measurement messages) in Loopback Mode
- Probe messages sent using Segment List(s) of the SR Policy Candidate Path(s)
- Probe messages are not punted on the reflector out of fast-path
- Return path can be IP or SR
- Liveness failure is notified when consecutive N number of probe messages are not received back at the sender
- Round-trip delay ( $t4 - t1$ ) metrics are notified when consecutive M number of probe messages have delay values exceed the configured thresholds

# Enhanced Liveness and Performance Monitoring of SR Policy

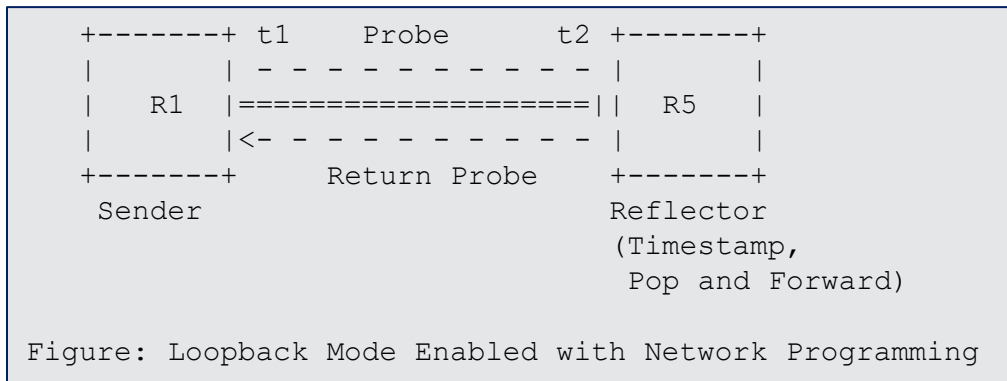

- Use PM probes in loopback mode enabled with network programming function
  - The network programming function optimizes the "operations of punt, add receive timestamp and inject the probe packet" on the reflector node
- The reflector node adds the receive timestamp in the payload of the received TWAMP Light or STAMP probe message without punting the probe message
  - Only adds the receive timestamp if the source address in the probe message matches the local node address
- Liveness failure is notified when consecutive N number of probe messages are not received back at the sender
- One-way delay ( $t2 - t1$ ) metrics are notified when consecutive M number of probe messages have delay values exceed the configured thresholds

# Probe Message – Enhanced Loopback Mode

- Sender adds the Transmit Timestamp
- Reflector adds the Receive Timestamp at fixed offset locally provisioned (consistently in the network)
  - E.g. offset-byte 16 from the start of the payload

```
+-----+
| Sequence Number |
+-----+
| Transmit Timestamp |
+-----+
| Error Estimate | MBZ |
+-----+
| Receive Timestamp |
+-----+
| Sender Sequence Number |
+-----+
| Sender Timestamp |
+-----+
| Sender Error Estimate | MBZ |
+-----+
| Sender TTL |
+-----+
| ~ |
| Padding |
+-----+
```

Figure: TWAMP Light Probe Message Format

```
+-----+
| Sequence Number |
+-----+
| Transmit Timestamp |
+-----+
| Error Estimate | SSID |
+-----+
| Receive Timestamp |
+-----+
| Sender Sequence Number |
+-----+
| Sender Timestamp |
+-----+
| Sender Error Estimate | MBZ |
+-----+
| Sender TTL | Padding |
+-----+
```

Figure: STAMP Probe Message Format

# SR-MPLS with Timestamp and Forward Function

```
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               | TC  |S|          TTL          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
.
.
.
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               | TC  |S|          TTL          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          Timestamp Label (TBA1)          | TC  |S|          TTL          |
+-----+-----+-----+-----+-----+-----+-----+-----+
| IP Header                                                                |
.  Source IP Address = Reflector IPv4 or IPv6 Address                    .
.  Destination IP Address = Sender IPv4 or IPv6 Address                  .
.  Protocol = UDP                                                          .
.
+-----+-----+-----+-----+-----+-----+-----+-----+
| UDP Header                                                                |
.  Source Port = As chosen by Sender                                      .
.  Destination Port = User-configured Port                                .
.
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Payload as defined in Section 4.2.1 of RFC 5357                        |
| Payload as defined in Section 4.2 of RFC 8762                          |
.
+-----+-----+-----+-----+-----+-----+-----+-----+
```

Example Probe Message for SR-MPLS with Timestamp Label

- Extended Special-purpose label (TBA1) is defined for Timestamp and Forward network function
- Reverse Path can be IP or SR-MPLS
- Source and Destination Addresses are swapped to represent the Reverse direction path



# SRv6 with Timestamp and Forward Function

```
| IP Header
. Source IP Address = Sender IPv6 Address
. Destination IP Address = Next IPv6 Address
.
+-----+
| SRH as specified in RFC 8754
. <Segment List>
. END.TSF with Target SID
.
+-----+
| IP Header
. Source IP Address = Reflector IPv6 Address
. Destination IP Address = Sender IPv6 Address
.
+-----+
| UDP Header
. Source Port = As chosen by Sender
. Destination Port = User-configured Port
.
+-----+
| Payload as defined in Section 4.2.1 of RFC 5357 |
| Payload as defined in Section 4.2 of RFC 8762
.
+-----+
```


### Example Probe Message for SRv6 with Endpoint Function

- Endpoint Function END.TSF is defined for Timestamp and Forward and carried for the Reflector node SID
- Reverse path can be IP
  - Reflector node removes SRH
- Reverse path can be SR
  - Reverse direction SR path carried in SRH
  - Reflector node does not remove the SRH
- Source and Destination Addresses are swapped to represent the Reverse direction path in the inner IPv6 header

# ECMP Support for SR Paths

- SR Paths can have ECMP between the ingress and transit nodes, between transit nodes and between transit and egress nodes.
- Sending PM probe queries that can take advantage of the hashing function in forwarding plane.
- Existing forwarding mechanisms are applicable to PM probe messages. Examples are:
  - For IPv4
    - Sweeping destination address in IPv4 header (e.g. 127/8) if return path is SR-MPLS
  - For IPv6
    - Sweeping flow label in IPv6 header

# Example Provisioning Model

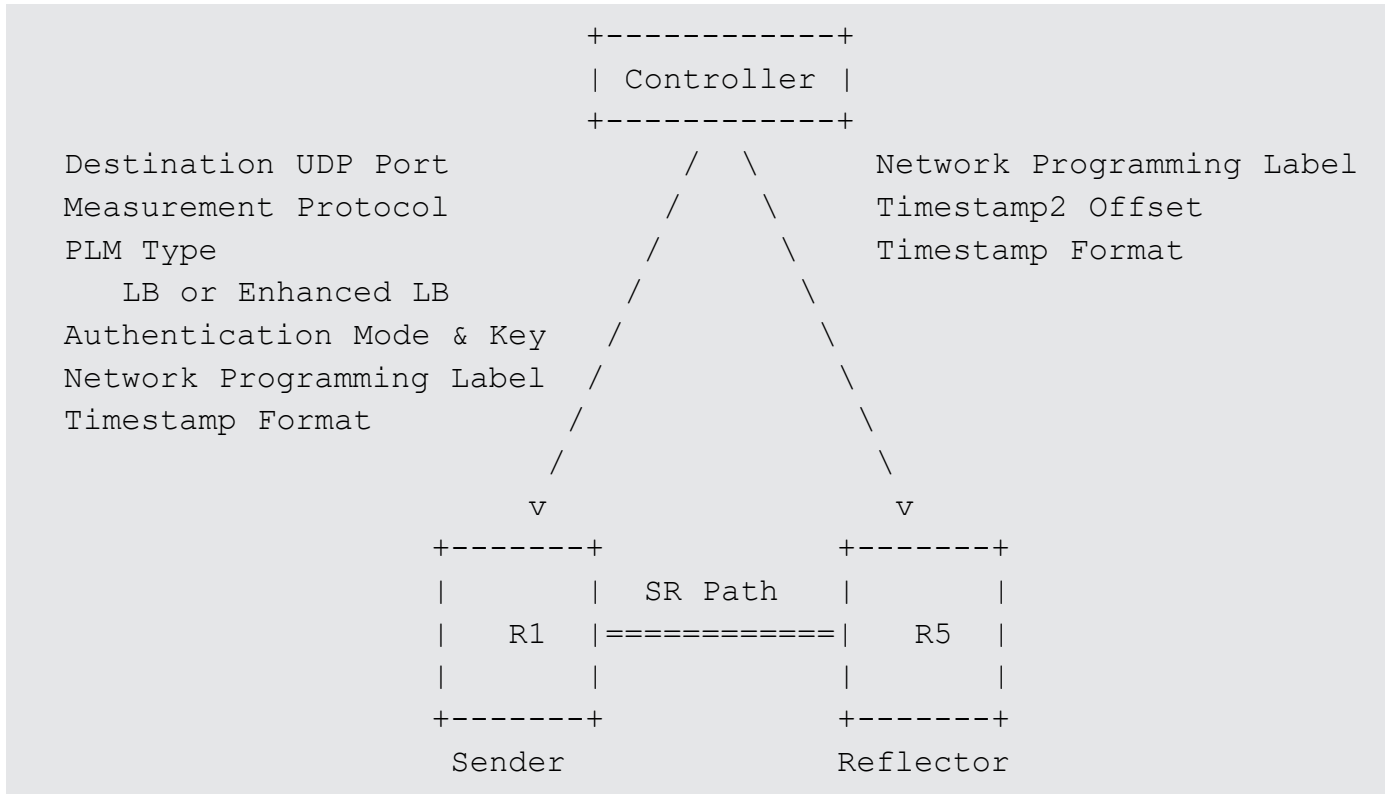

# Next Steps

- Welcome your comments and suggestions
- Requesting WG adoption

# Thank you