

# Simple TWAMP (STAMP) Extensions for Segment Routing Networks

*draft-gandhi-ippm-stamp-srpm-01*

*Rakesh Gandhi - Cisco Systems ([rgandhi@cisco.com](mailto:rgandhi@cisco.com)) - Presenter*

*Clarence Filsfils - Cisco Systems ([cfilsfil@cisco.com](mailto:cfilsfil@cisco.com))*

*Daniel Voyer - Bell Canada ([daniel.voyer@bell.ca](mailto:daniel.voyer@bell.ca))*

*Mach(Guoyi) Chen - Huawei ([mach.chen@huawei.com](mailto:mach.chen@huawei.com))*

*Bart Janssens - Colt ([Bart.Janssens@colt.net](mailto:Bart.Janssens@colt.net))*

# Agenda

- Requirements and Scope
- Summary of Extensions
- Next Steps

# Requirements and Scope

## Requirements:

- Support in-band Delay Measurement
- Support stand-alone Direct Measurement Test Packet for Packet Loss
- Support links and SR paths

## Goals:

- Eliminate per session provisioning on Session-Reflector
- No control-channel signaling for sessions
- Support hardware implementation - very high scale for number of sessions and faster detection interval

## Scope:

- STAMP [RFC 8762]
- STAMP TLVs [draft-ietf-ippm-stamp-option-tlv]

# Review Comments

1. Draft status:
  - a) Draft defines extensions for RFC 8762 - STAMP
    - Updates RFC 8762 due to new field (control code) in the test packet
2. Extensions specific to SR?
3. Editorial
  - a) Define Abbreviations (BSID, SRH, HMAC-SHA)
  - b) Use Test packet, Session-Sender, Session-Reflector terms
  - c) Show entire test packet with session-sender control code field
  - d) Indicate new packet loss packet is for direct measurement
  - e) Move Receive Counter and other Reply test packet fields to Section 4.1 from 3.2
    - Explain how the counters and sequence numbers are used to do loss measurement

# STAMP - Session-Sender Control Code Field

## Session-Sender Control Code


0x0: Out-of-band Reply Requested.

This is the existing behavior.

0x1: In-band Reply Requested.

Indicates that this test packet has been sent over a bidirectional path and the reply is required over the same path in the reverse direction.

0x2: No Reply Requested.

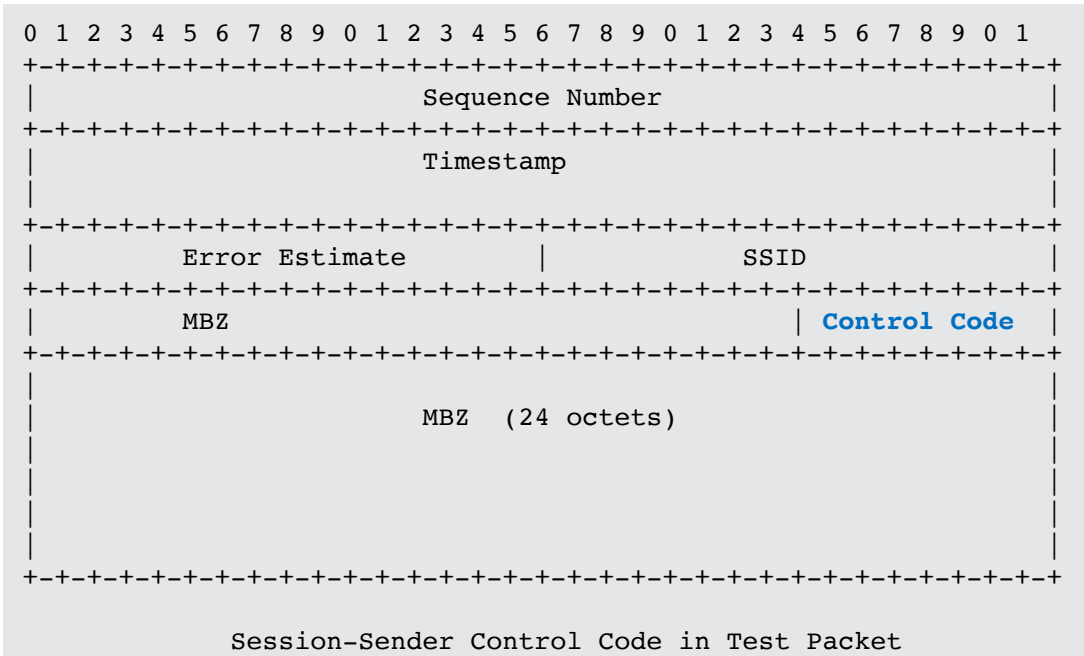

# STAMP - Session-Sender Control Code Field

- Two-way measurement mode for links
  - Reflector needs to send reply on the same link (**in-band**) (symmetric delay on forward and reverse link)
- No way of knowing if one-way or two-way mode from the received STAMP test packet
- Not scalable to configure for each (session id, source-address) on session-reflector (can have an order of 1K links)
  - Cannot always send reply on the same incoming interface as the STAMP test packet reply may need to be IP routed

# STAMP - Return Path TLV

## Return Path TLV (value TBA2):

### Sub-TLVs Types:

- Type (value 1): Return Address. Target node address for the reply; different than the Source Address in the test packet
- Type (value 2): SR-MPLS Label Stack of the Reverse SR Path
- Type (value 3): SR-MPLS Binding SID [draft-ietf-pce-binding-label-sid] of the Reverse SR Policy
- Type (value 4): SRv6 Segment List of the Reverse SR Path
- Type (value 5): SRv6 Binding SID [draft-ietf-pce-binding-label-sid] of the Reverse SR Policy



Figure: Return Path TLV

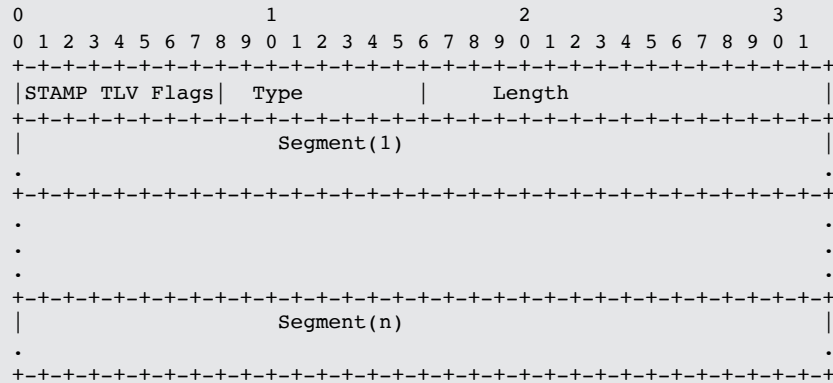


Figure: Segment List Sub-TLV in Return Path TLV

# STAMP - Return Path TLV


- For Bidir SR Policy, reply test packet needs to be sent (**in-band**) on the reverse SR Policy
- Bidir SR Path (forward and reverse) dynamically computed using CSPF by the head-end node
  - Path can change often based on topology change, link/node failure in the network, etc.
- No signaling in SR, possible to use PCE
- Need per session state on session-reflector node to store reverse paths (each session-id, source-address) – order of 10Ks SR Policy (that can have active and standby candidate-paths and each can have multiple segment-lists)
- In SR, state is in the packet



# STAMP - Destination Node Address TLV

## Destination Node Address TLV (value TBA1):

- Indicates the address of the intended recipient node of the test packet.
- The Session-Reflector node **MUST NOT** send reply if it is not the intended destination node of the test packet.
- Useful when test packet is sent with 127/8 destination address (e.g. sweeping ECMP paths).

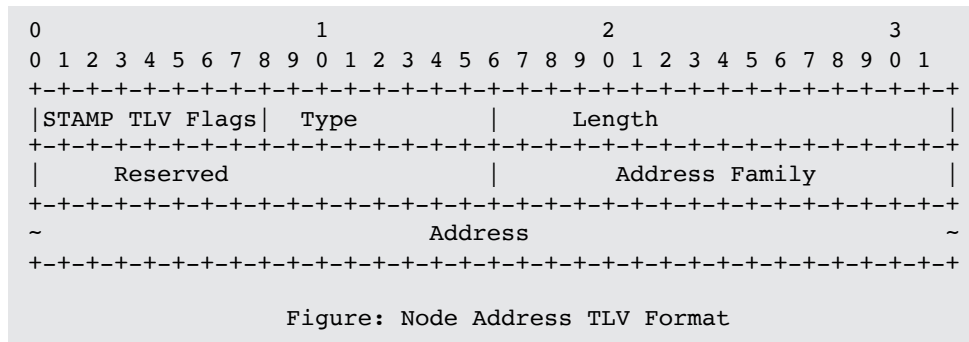

# Stand-alone Direct Measurement Test Packet

- Stand-alone Direct Measurement test packet defined
  - Hardware efficient counter-stamping
    - Well-known locations for transmit and receive traffic counters
- Direct Measurement packet is also defined for authenticated mode
- User-configured destination UDP **Port2** is used for identifying direct measurement test packets
- Does not modify the existing STAMP procedure as different destination UDP port is used for direct measurement test packets

## Flags

- X set to 1 for 64-Bit Counter, set to 0 for 32-Bit Counter
- B set to 1 for Byte Counter, set to 0 for Packet Counter
- T set to 1 for Sender-DSCP scoped Counter

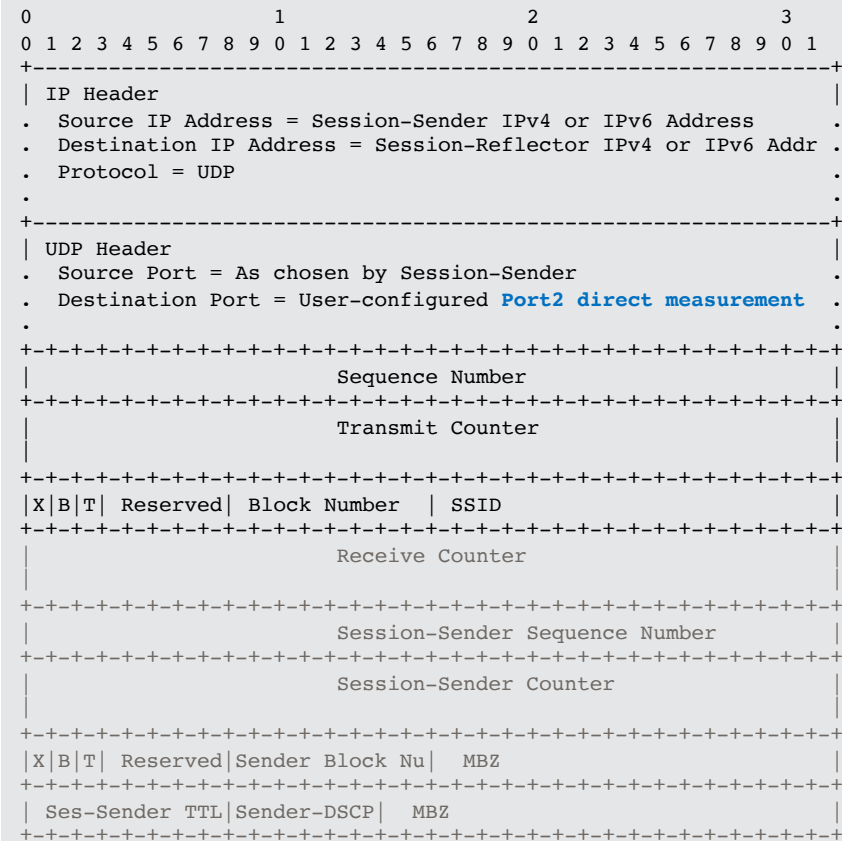


Figure: Session-Reflector Direct Measurement Test Packet

# Direct Measurement TLV vs. Direct Measurement Test Packet

## STAMP Direct Measurement TLV


1. Suitable for collecting data packet counters from control plane (distributed forwarding plane)
2. Direct Measurement TLV supports **32-bit packet** counters
3. Does not support per-traffic class direct measurement (DSCP TLV processing not specified for Counters)
4. STAMP TLV processing in hardware
5. Counter not at fixed location
6. Counter location deeper into the packet (Eth 18, IPv6 40, UDP 8, STAMP 44, TLV Type 4, Total = 114 Byte) – load into write-able memory
7. Hardware needs to write both timestamp and counter in the injected packet – not capable
8. Session-reflector hardware to parse STAMP TLVs in receive packets to decide if receive counter to be punted to the control-plane

## Direct Measurement Test Packet

1. Suitable for collecting data packet counters from hardware – inline counter-stamping (for P2P connections)
2. Direct Measurement Test Packet supports **32-bit packet and byte** counters
3. Direct Measurement Test Packet supports **64-bit packet and byte** counters
4. Direct Measurement Test Packet identifies the block number of the counters - used for alternate marking method (RFC 8321)
5. Per traffic-class counter collection (per traffic-class loss measurement) (e.g., drop best effort traffic)
6. No TLV processing in hardware
7. Two-way direct measurement for links with reply packet with transmit counter at the same location – important property for hardware counter-stamping
8. Counter at fixed location
9. Counter location earlier into the packet (Eth 18, IPv6 40, UDP 8, Seq 4, Total = 70 Byte)

# Link Loss Direct Measurement

## - Inline Counter-stamping in Hardware

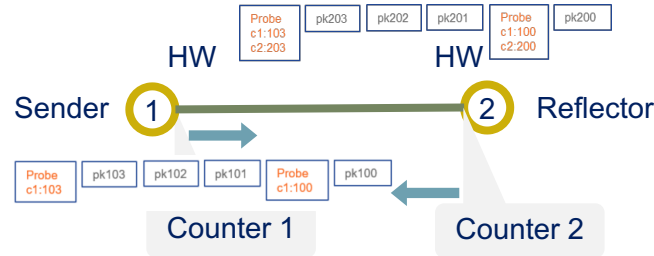

- Advertise extended TE metrics – link loss percentage
  - RFC 8570 (IS-IS)
  - RFC 7471 (OSPF)
  - RFC 8571 (BGP-LS)

- One Way Packet Loss %
 
$$= 100 * ((C1(t) - C1(t-1)) - (C2(t) - C2(t-1))) / (C1(t) - C1(t-1))$$

$$= 100 * ((103 - 100) - (203 - 200)) / (103 - 100)$$

$$= 0$$
- Traffic Counters – counter-stamping in hardware

|   |             |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |  |
|---|-------------|---|---|---|---|---|---|---|---|--------|---|---|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|--|
| 0 | 1           | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8         | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |  |
| + | -           | + | - | + | - | + | - | + | - | +      | - | + | - | + | - | + | - | +         | - | + | - | + | - | + | - | + | - | + | - | + | - |  |  |  |
|   | Type        |   |   |   |   |   |   |   |   | Length |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |  |
| + | -           | + | - | + | - | + | - | + | - | +      | - | + | - | + | - | + | - | +         | - | + | - | + | - | + | - | + | - | + | - | + | - |  |  |  |
|   | A  RESERVED |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   | Link Loss |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |  |
| + | -           | + | - | + | - | + | - | + | - | +      | - | + | - | + | - | + | - | +         | - | + | - | + | - | + | - | + | - | + | - | + | - |  |  |  |

# Next Steps

- Welcome your comments and suggestions
- Requesting WG adoption

# Thank you

# STAMP Test Packet with Direct Measurement TLV

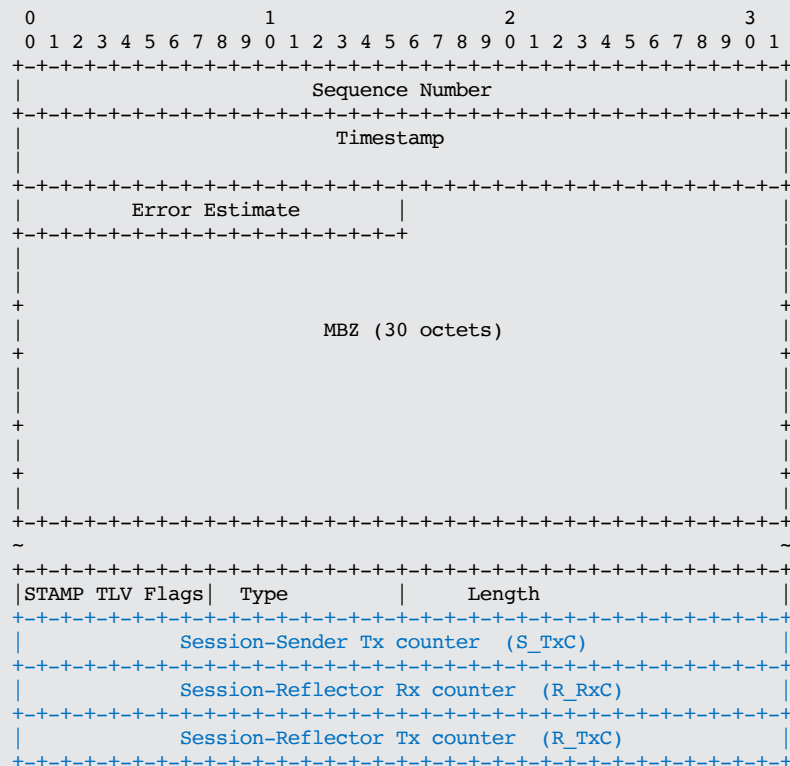


Figure: Session-Sender Test Packet Format

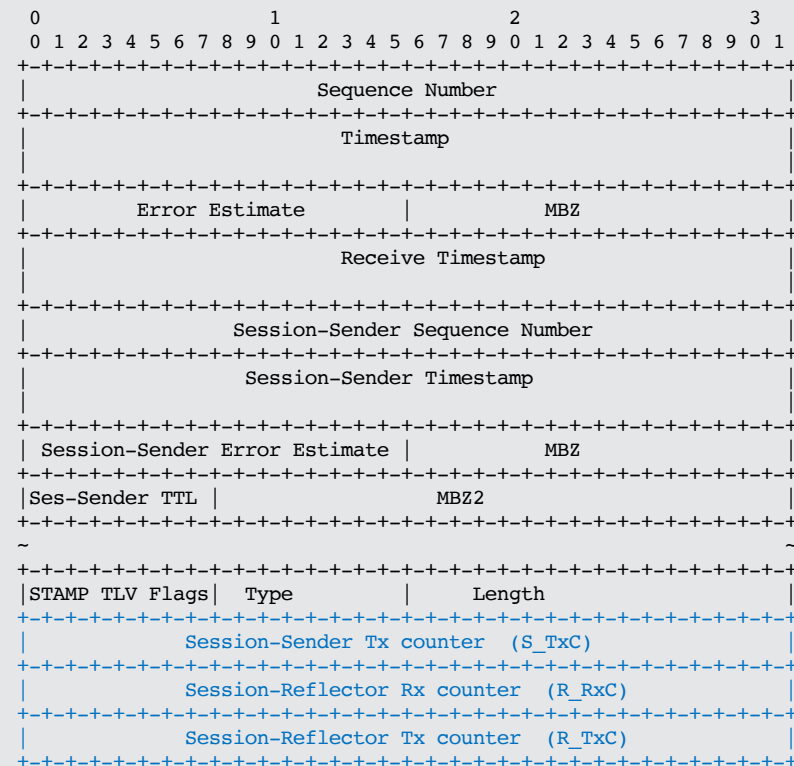


Figure: Session-Reflector Test Packet Format