
4) How to configure static Route & Default Route to the Routers

Step 1:- Create the topology with 2 subnetworks. Apply the basic configuration to all hosts & interfaces

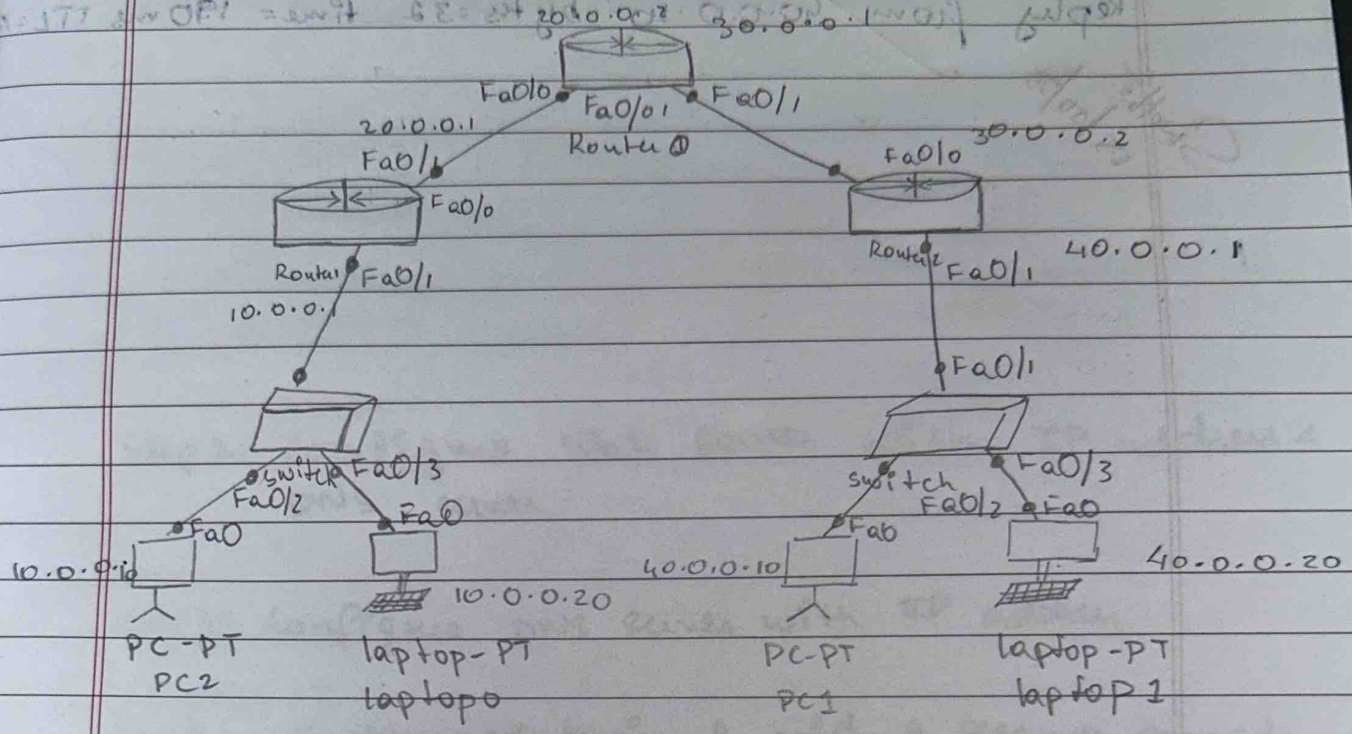

Step 2: Configure static route on R2 to route packets for 10.0.0.0 & 40.0.0.0 networks using the commands in CLI.

Step 3: Now we are going to configure default route on R1 & R3. So the routers forward packets to assigned ip address next hop address.

Step 4: Now check the routing table of R1, R2, R3

~~Step 5:~~

Step 5: Now ping from 10.0.0.10 to 40.0.0.10 in cmd & with PDU, you will get the reply.

Output :-

PC> ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data

Reply from 40.0.0.10 : bytes=32 time = 151ms TTL=
Reply from 40.0.0.10 : bytes = 32 time=157ms TTL=
Reply from 40.0.0.10 : bytes =32 time = 172ms TTL=
Reply from 40.0.0.10 : bytes =32 time = 190 ms TTL=

Sruthi
05/10/26