
2. Configure IP address to routers in packet tracer. Explore the following messages: Ping responses, destination unreachable, request timed out, reply.

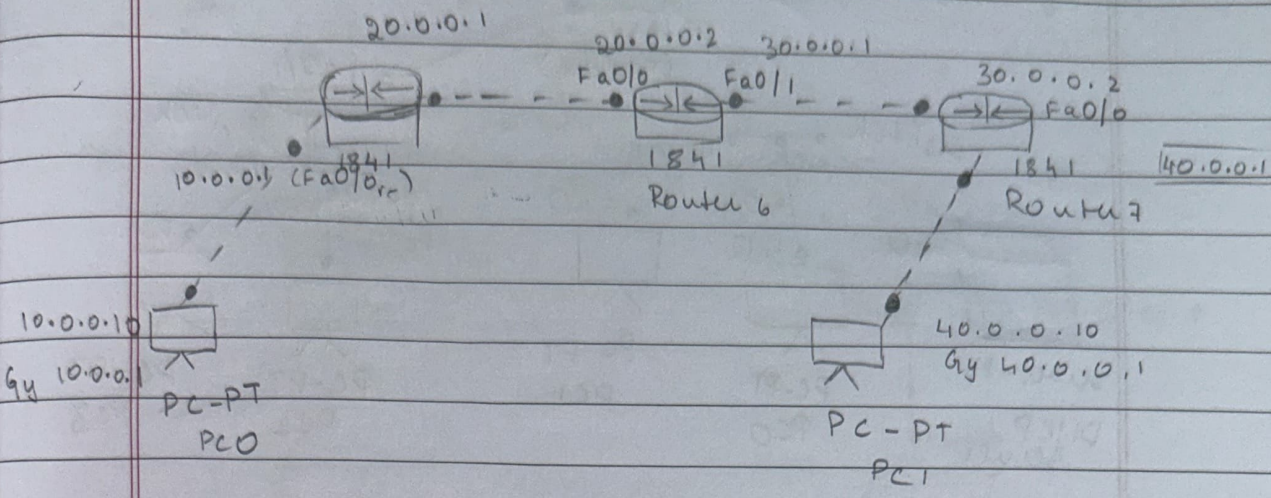

~~Host~~ ~~IP address~~ ~~Subnet mask~~
~~Route~~

PC > ping 10.0.0.6
Pinging 10.0.0.6 with 32 bytes of data
Request timed out
Request timed out
PC> ping 40.0.0.10
pinging 40.0.0.10 with 32 bytes of data
Reply from 10.0.0.1 : Destination host unreachable
Reply from 10.0.0.1 : Destination host unreachable
PC > ping 10.0.0.1
pinging 10.0.0.1 with 32 bytes of data
Replay from 10.0.0.1: bytes = 32 time=24 ms TTL=255
Replay from 10.0.0.1 : bytes = 32 time = 31ms TTL=255
Replay from 10.0.0.1 : bytes=32 time=31ms TTL=25
Reply from 10.0.0.1 : bytes = 32 time = 30ms TTL=25
Ping statistics for 10.0.0.1
Packets: sent = 4, Received=4, lost=0 (0% loss),
Approximate round trip times in ms:-
Minimum = 24ms, Maximum = 31ms, Avg = 29ms

18/09/26