



# Miniature USB socket 4-pin female SMT

Order code: **24-0356**

## 1 Specifications:

Current rating: 0.5A/pin max.

Voltage rating: 30V (DC)

Dielectric withstanding voltage: 100VAC 1 minute

Contact resistance: 50mΩ max.

Insulation resistance: 100mΩ min.




Temperature range: -20°C to +70°C

## 2 Materials:



Housing: High temperature plastic

Shell: Copper alloy


Contact: Copper alloy

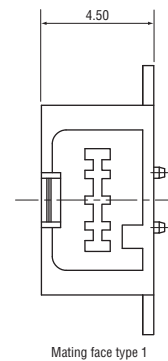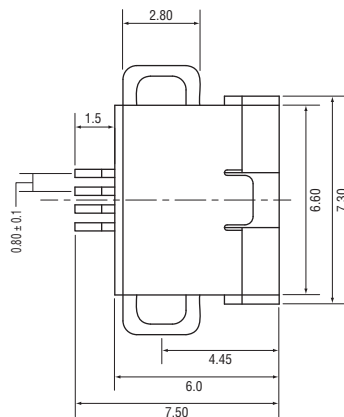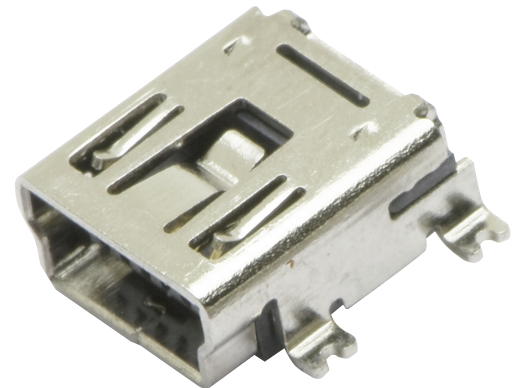

Mating face type 1



Mating face type 2

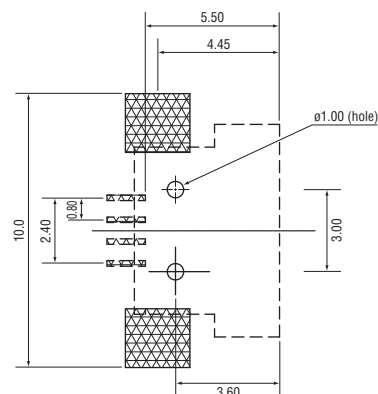

Recommend PCB Layout (tolerance = ±0.05)