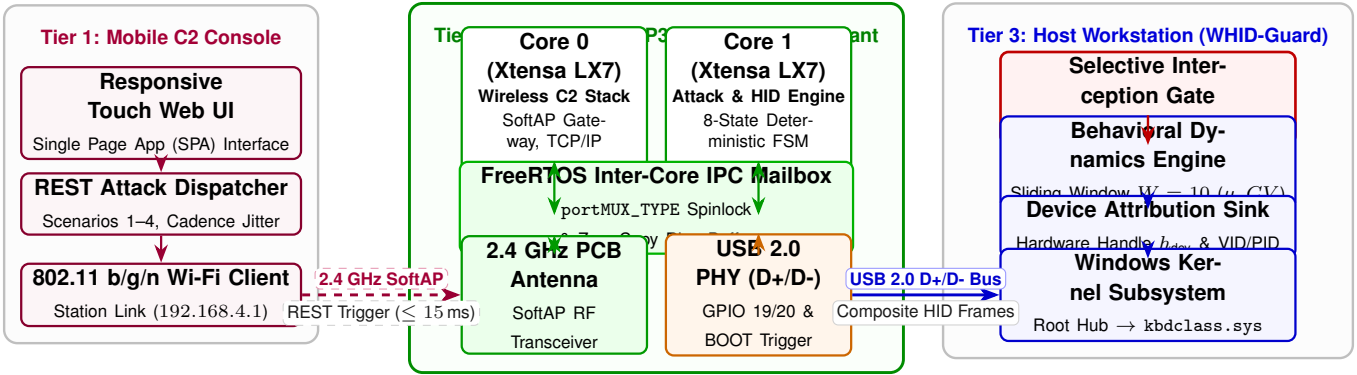

Tier 1: Mobile C2 Console
Responsive Touch Web UI
Single Page App (SPA) Interface
REST Attack Dispatcher
Scenarios 1–4, Cadence Jitter
802.11 b/g/n Wi-Fi Client
Station Link (192.168.4.1)
2.4 GHz SoftAP
REST Trigger (≤ 15 ms)
Core 0 (Xtensa LX7)
Wireless C2 Stack
SoftAP Gate-way, TCP/IP
Core 1 (Xtensa LX7)
Attack & HID Engine
8-State Deter-ministic FSM
FreeRTOS Inter-Core IPC Mailbox
portMUX_TYPE Spinlock
2.4 GHz PCB Antenna
SoftAP RF Transceiver
USB 2.0 PHY (D+/D-)
GPIO 19/20 & BOOT Trigger
USB 2.0 D+/D- Bus
Composite HID Frames
Tier 3: Host Workstation (WHID-Guard)
Selective Inter-ception Gate
Behavioral Dy-namics Engine
Device Attribution Sink
Hardware Handle & VID/PID
Windows Ker-nel Subsystem
Root Hub → kbdclass.sys