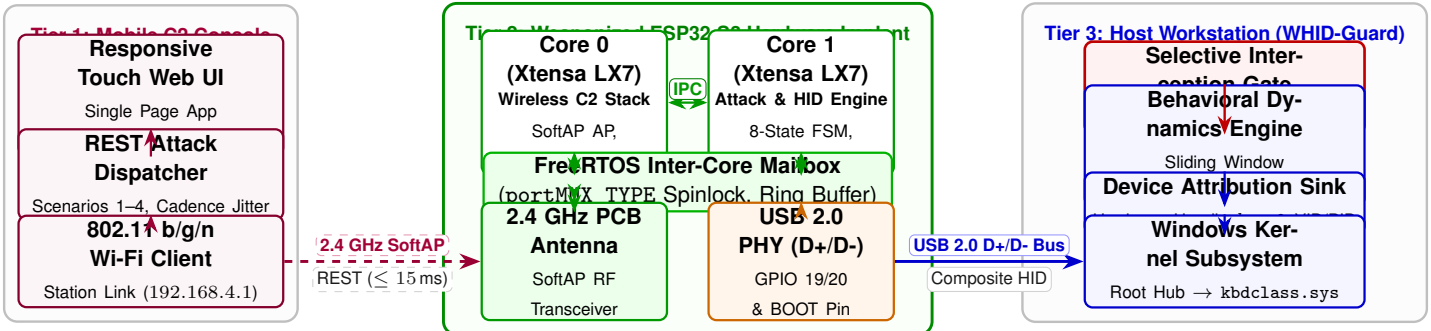

Responsive
Touch Web UI
Single Page App
REST Attack
Dispatcher
Scenarios 1–4, Cadence Jitter
802.11 b/g/n
Wi-Fi Client
Station Link (192.168.4.1)
2.4 GHz SoftAP
REST (≤ 15 ms)
Core 0
(Xtensa LX7)
Wireless C2 Stack
SoftAP AP,
IPC
Core 1
(Xtensa LX7)
Attack & HID Engine
8-State FSM,
FreeRTOS Inter-Core Mailbox
(portMUX_TYPE Spinlock, Ring Buffer)
2.4 GHz PCB
Antenna
SoftAP RF
Transceiver
USB 2.0
PHY (D+/D-)
GPIO 19/20
& BOOT Pin
USB 2.0 D+/D- Bus
Composite HID
Tier 3: Host Workstation (WHID-Guard)
Selective Inter-
Behavioral Dy-
namics Engine
Sliding Window
Device Attribution Sink
Windows Ker-
nel Subsystem
Root Hub → kbdclass.sys