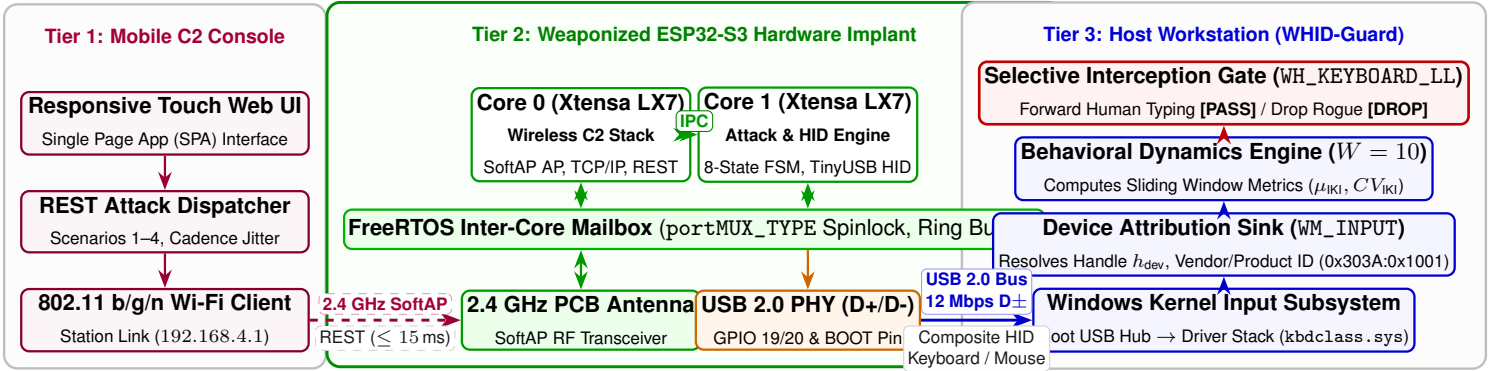

Tier 1: Mobile C2 Console
Responsive Touch Web UI
Single Page App (SPA) Interface
REST Attack Dispatcher
Scenarios 1–4, Cadence Jitter
802.11 b/g/n Wi-Fi Client
Station Link (192.168.4.1)
2.4 GHz SoftAP
REST (≤ 15 ms)
Tier 2: Weaponized ESP32-S3 Hardware Implant
Core 0 (Xtensa LX7)
Wireless C2 Stack
SoftAP AP, TCP/IP, REST
IPC
Core 1 (Xtensa LX7)
Attack & HID Engine
8-State FSM, TinyUSB HID
FreeRTOS Inter-Core Mailbox (portMUX_TYPE Spinlock, Ring Bu
2.4 GHz PCB Antenna
SoftAP RF Transceiver
USB 2.0 PHY (D+/D-)
GPIO 19/20 & BOOT Pin
USB 2.0 Bus
12 Mbps D±
Composite HID
Keyboard / Mouse
Tier 3: Host Workstation (WHID-Guard)
Selective Interception Gate (WH_KEYBOARD_LL)
Forward Human Typing [PASS] / Drop Rogue [DROP]
Behavioral Dynamics Engine (W = 10)
Computes Sliding Window Metrics (μIKI, CVIKI)
Device Attribution Sink (WM_INPUT)
Resolves Handle hdev, Vendor/Product ID (0x303A:0x1001)
Windows Kernel Input Subsystem
oot USB Hub → Driver Stack (kbdclass.sys)