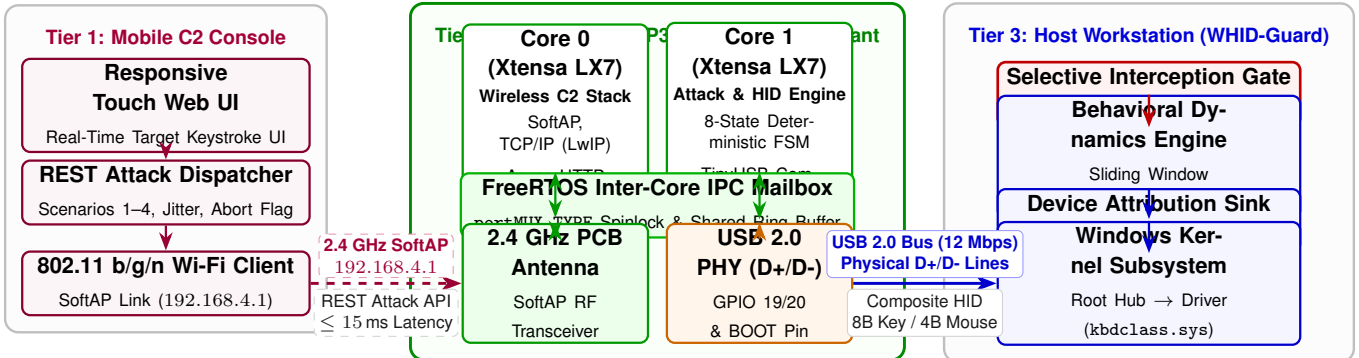

Tier 1: Mobile C2 Console
Responsive Touch Web UI
Real-Time Target Keystroke UI
REST Attack Dispatcher
Scenarios 1–4, Jitter, Abort Flag
802.11 b/g/n Wi-Fi Client
SoftAP Link (192.168.4.1)
2.4 GHz SoftAP
192.168.4.1
REST Attack API
≤ 15 ms Latency
Core 0 (Xtensa LX7)
Wireless C2 Stack
SoftAP, TCP/IP (LwIP)
Core 1 (Xtensa LX7)
Attack & HID Engine
8-State Deterministic FSM
FreeRTOS Inter-Core IPC Mailbox
2.4 GHz PCB Antenna
SoftAP RF Transceiver
USB 2.0 PHY (D+/D-)
GPIO 19/20
& BOOT Pin
USB 2.0 Bus (12 Mbps)
Physical D+/D- Lines
Composite HID
8B Key / 4B Mouse
Tier 3: Host Workstation (WHID-Guard)
Selective Interception Gate
Behavioral Dynamics Engine
Sliding Window
Device Attribution Sink
Windows Kernel Subsystem
Root Hub → Driver
(kbdclass.sys)