

Instrumental (CMOS) Characterization and Atmospheric Extinction Calculation using GIT

PH556 - Astrophysics Autumn '25

Prof. Varun Bhalerao, Dept. of Physics, IIT Bombay

Team GARAMA


Anvit Khade (23B1828)

Ronit Gajbhiye (23B1837)

Gokularamanan RS (23B1854)

Arya Joshi (23B1853)


Image source: Growth India

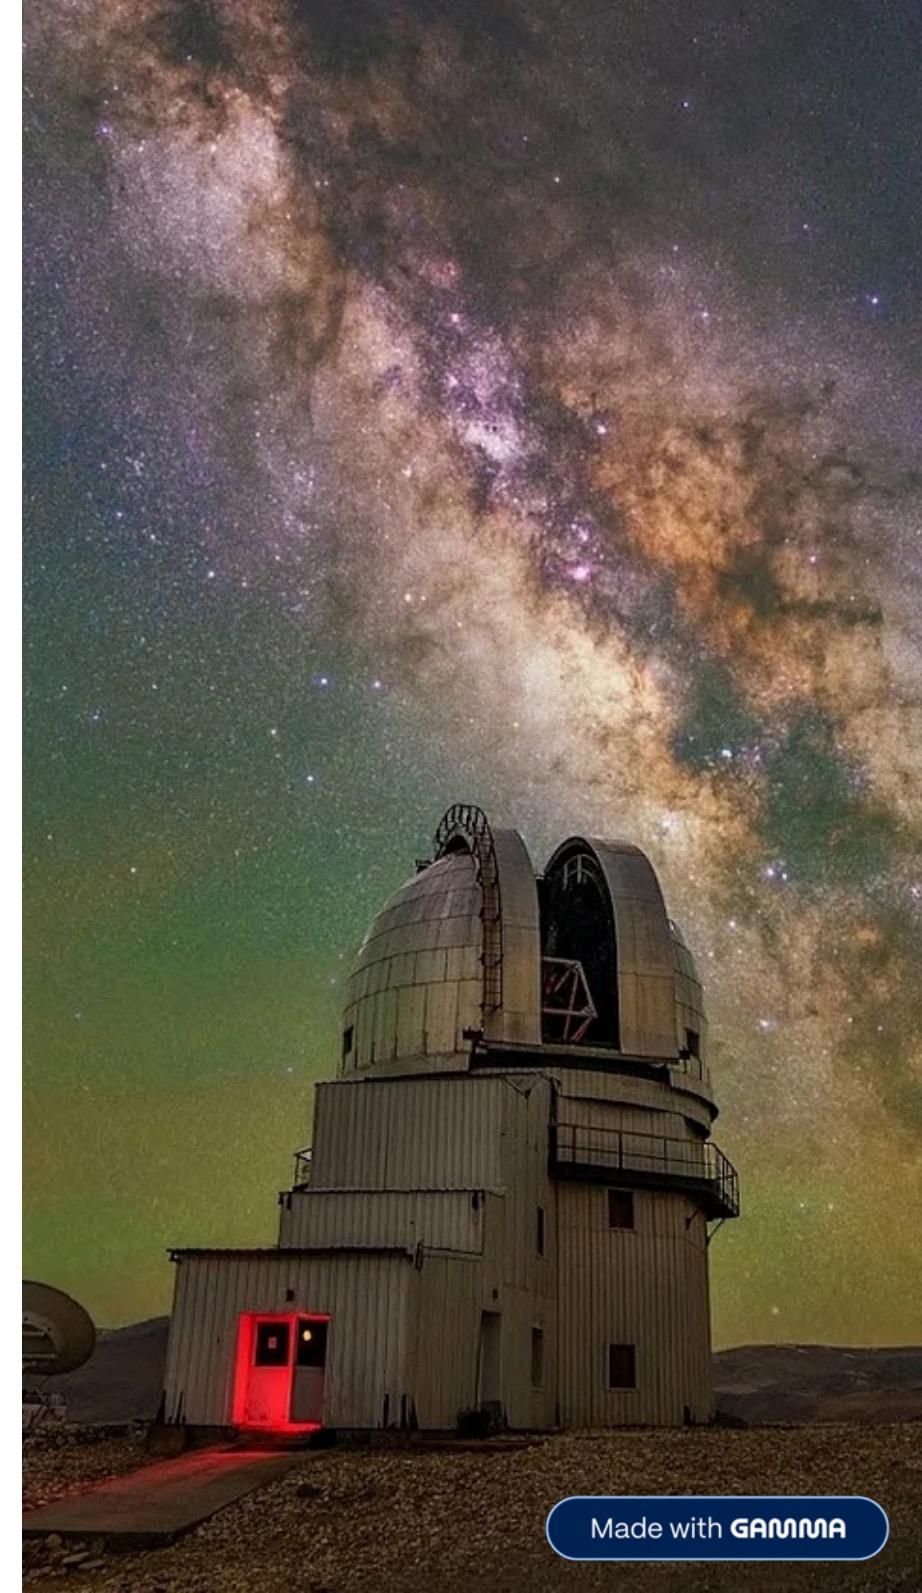

CMOS Imaging Principles and Application

The Complementary Metal-Oxide-Semiconductor (CMOS) sensor (**SBIG STC 428 FW**) is an advanced detector for astronomical photometry and imaging.

- Converts incident photons into measurable electronic charge with on-chip amplification.
- Offers low noise, high speed readout, and excellent dynamic range.
- Essential for precise measurement of celestial object brightness with reduced power consumption.

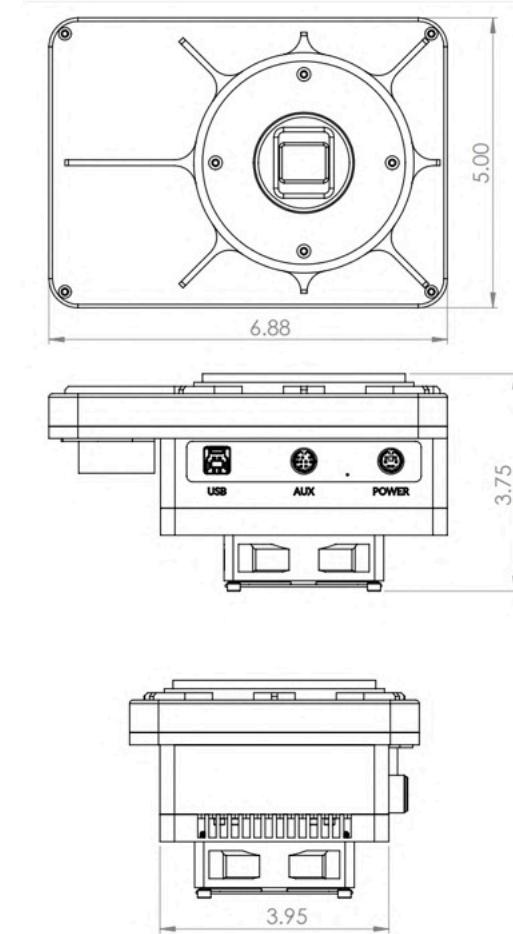

- The values we obtained differed from those reported in *data sheet*. This variation is precisely why we performed the CMOS characterization.

Source: [SBIG STC 428 FW Datasheet¹](#)

Key Parameters for Detector Calibration



Gain

Conversion factor from electrons (e^-) to Analog-to-Digital Units (ADU).



Dark Current


Thermal generation of charge in the absence of light; corrected via dark frames.



Readout Noise

Electronic noise introduced during charge transfer and measurement.

Histograms of Calibration Frames

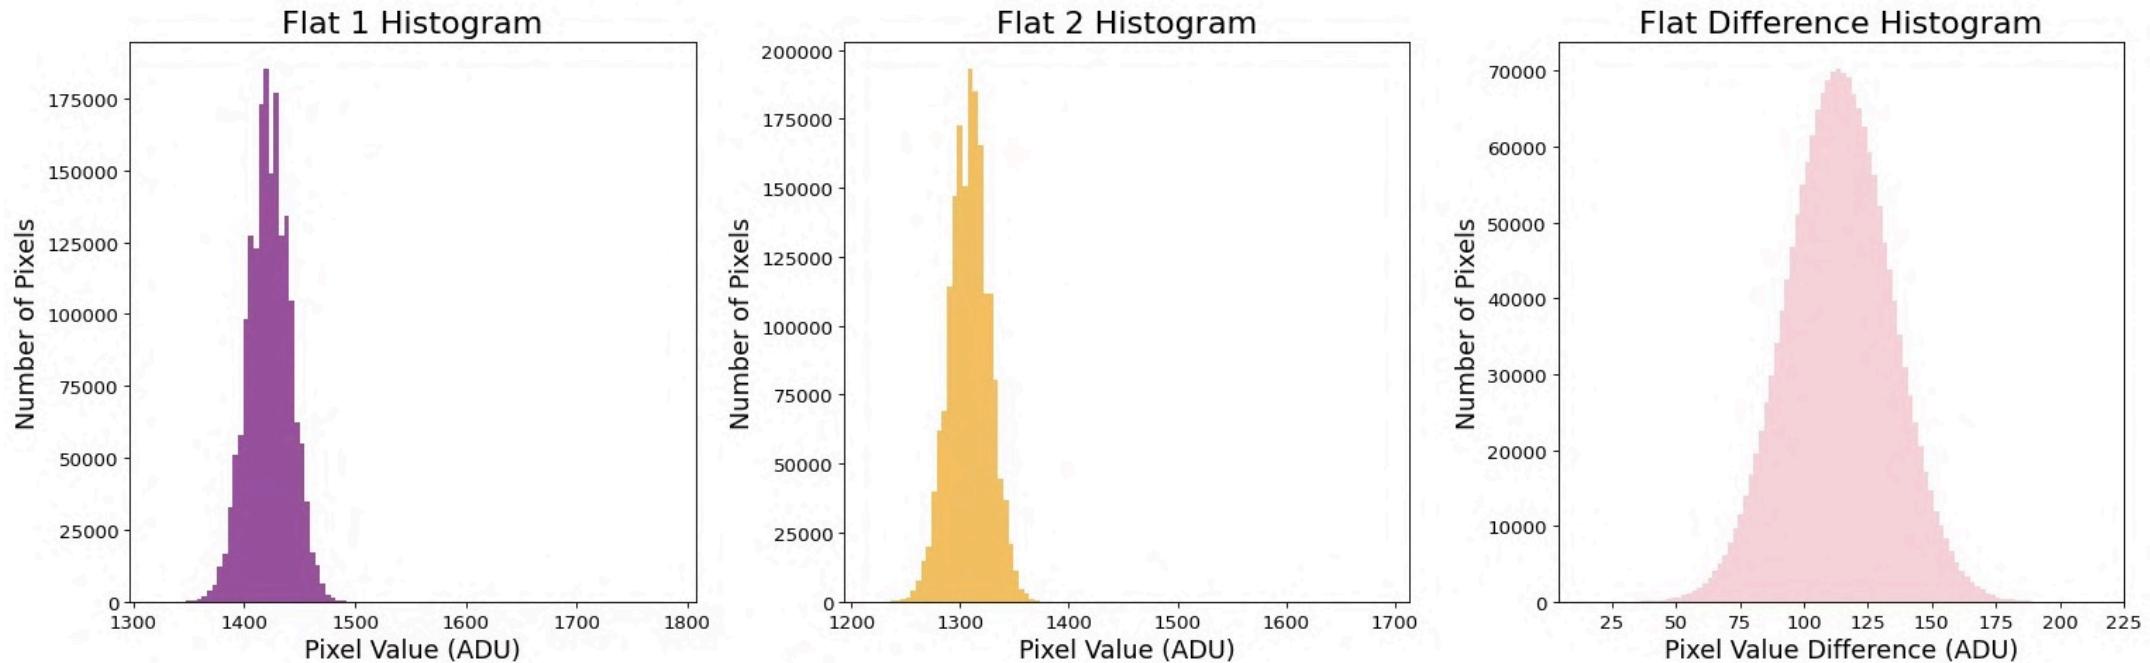

Gain determination methods

Mean Variance Method

Gain is measured by linear fitting a line to a scatter plot of noise variance vs signal mean from paired flats.

$$\text{Gain} = \frac{1}{m}$$

$$\text{Error : } \delta g = \frac{\delta m}{m^2}$$

Monitors Method


The Monitors Method calculates gain from **multiple independent measurements** using pairs of flat and bias frames, then take the mean and standard deviation.

$$\text{Gain} = \frac{(\overline{F_1} + \overline{F_2}) - (\overline{B_1} + \overline{B_2})}{\sigma_{(F_1 - F_2)}^2 - \sigma_{(B_1 - B_2)}^2}$$

$$\text{Error : } \sigma_G = \frac{N}{D} \sqrt{\left(\frac{\sigma_N}{N}\right)^2 + \left(\frac{\sigma_D}{D}\right)^2}$$

Gain results

Results of Mean Variance Method

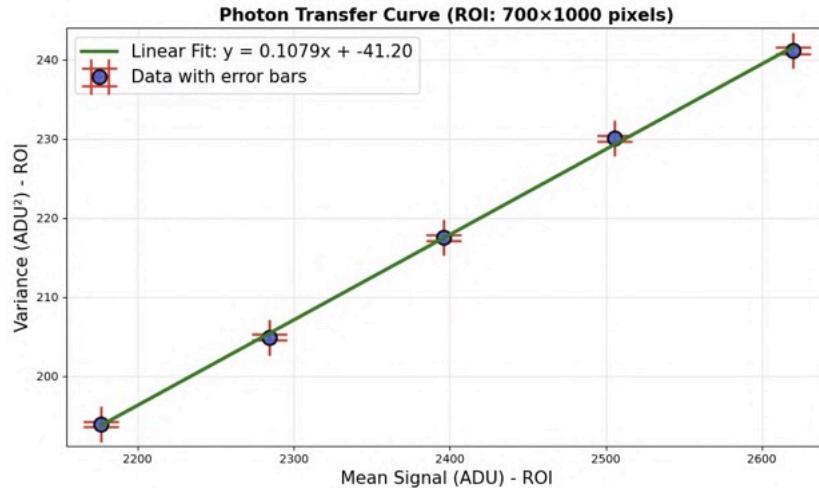

$$\text{Gain} = 9.26 \pm 0.14 e^-/\text{ADU}$$

Results of Monitors Method

Bias Statistics (ROI with σ -clipping):

Bias_1 mean: 241.06 ADU

Bias_2 mean: 241.06 ADU

$$\sigma_{(\text{diff_bias})}^2 = 0.93 \text{ ADU}^2$$

Flat statistics chosen pair wise

$$\text{Gain} = 9.94 \pm 0.06 e^-/\text{ADU}$$

Part I: CMOS Characterization

Read Noise

$$\text{Read noise} = \frac{\text{Gain} \times \sigma(B_1 - B_2)}{\sqrt{2}}$$

$$\Delta(\text{Read noise}) = \frac{G \sigma(B_1 - B_2)}{\sqrt{2}} \sqrt{\left(\frac{\Delta G}{G}\right)^2 + \left(\frac{\Delta \sigma(B_1 - B_2)}{\sigma(B_1 - B_2)}\right)^2}$$

Mean Variance Method

$$\text{Read Noise} = 6.32 \pm 0.10 e^- RMS$$


Monitors Method

$$\text{Read Noise} = 6.78 \pm 0.04 e^- RMS$$

Dark Current

$$\text{Dark Current} = \text{gain} \times \text{slope}$$

$$\delta(\text{Dark Current}) = \text{Dark Current} \times \sqrt{\left(\frac{\delta\text{Gain}}{\text{Gain}}\right)^2 + \left(\frac{\delta\text{Slope}}{\text{Slope}}\right)^2}$$

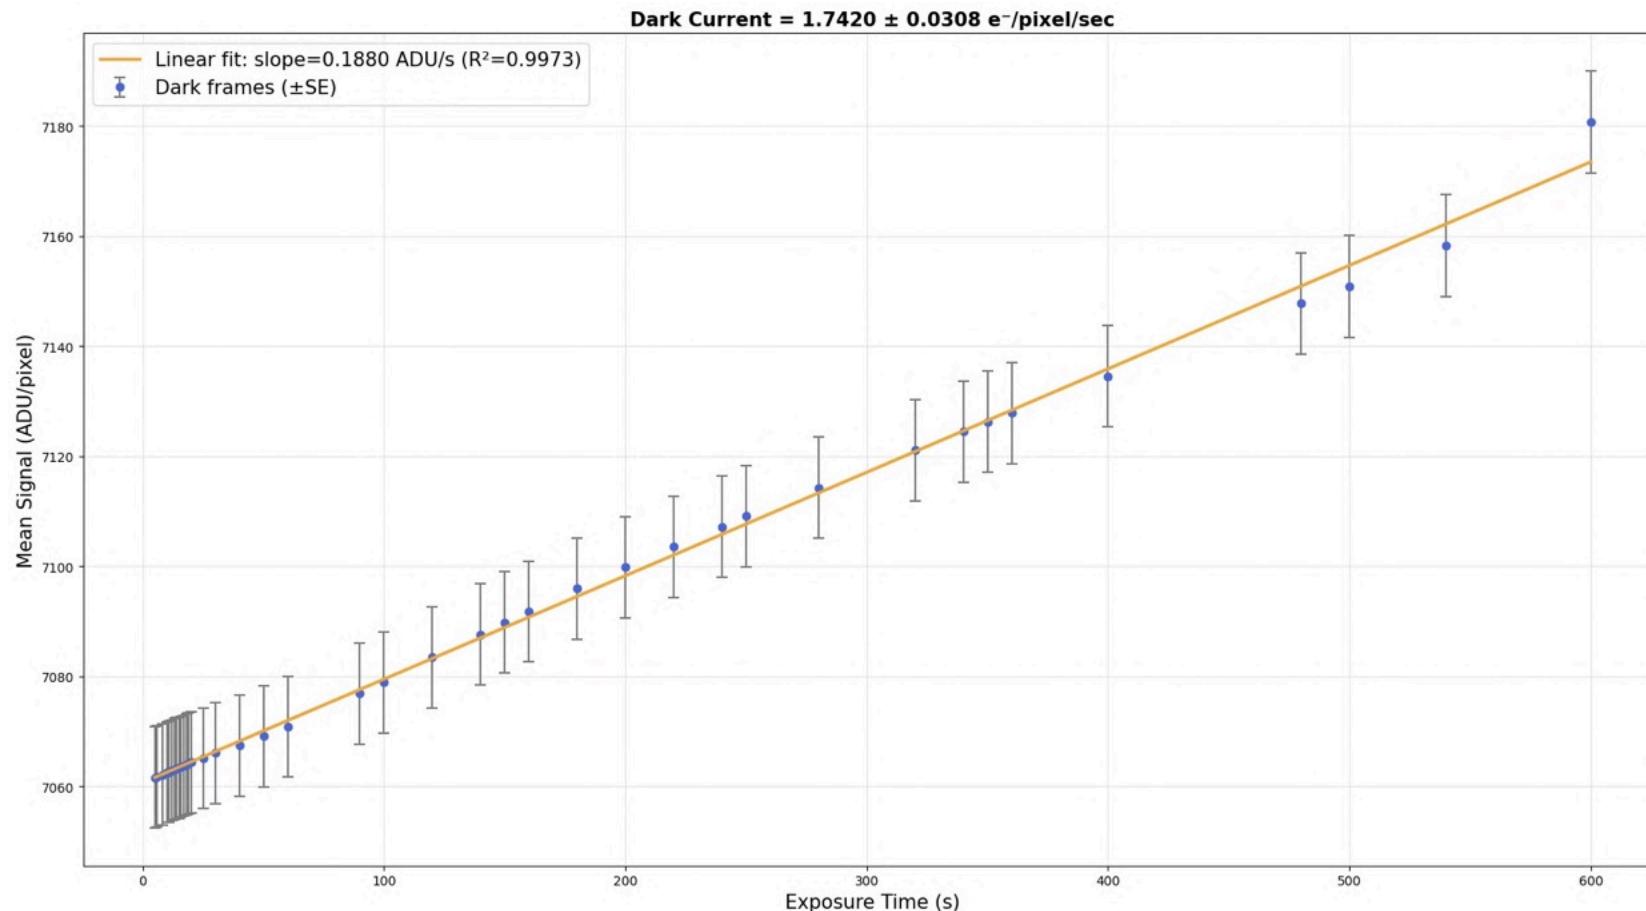

$$\text{Dark Current} = 1.74 \pm 0.03 e^-/\text{pixel/sec}$$


Part II: Atmospheric Extinction coefficient calculation

Impact of Earth's Atmosphere

Atmospheric extinction is the dimming of light as it passes through the atmosphere.

A correction is required for accurate photometry.

Attenuation of source light due to atmosphere

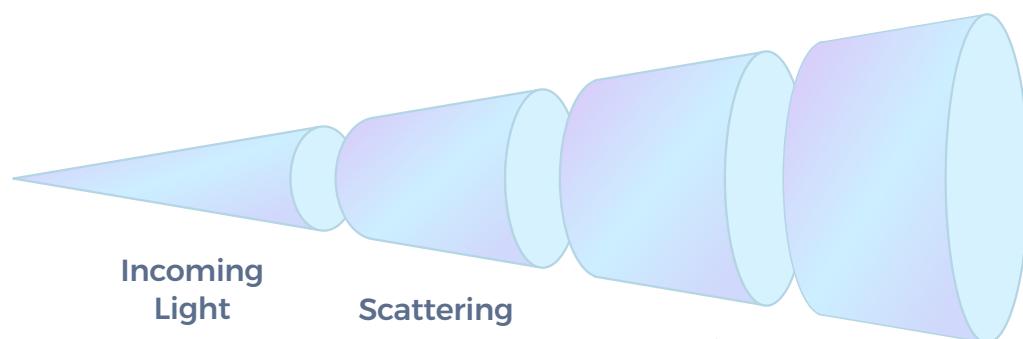

Incoming Light

Initial light source entering the medium.

Scattering

Light deviates from its straight trajectory.


Absorption

Light energy is converted into other forms.

Dimmed Signal

The resulting attenuated light is observed.

Airmass variation with zenith angle

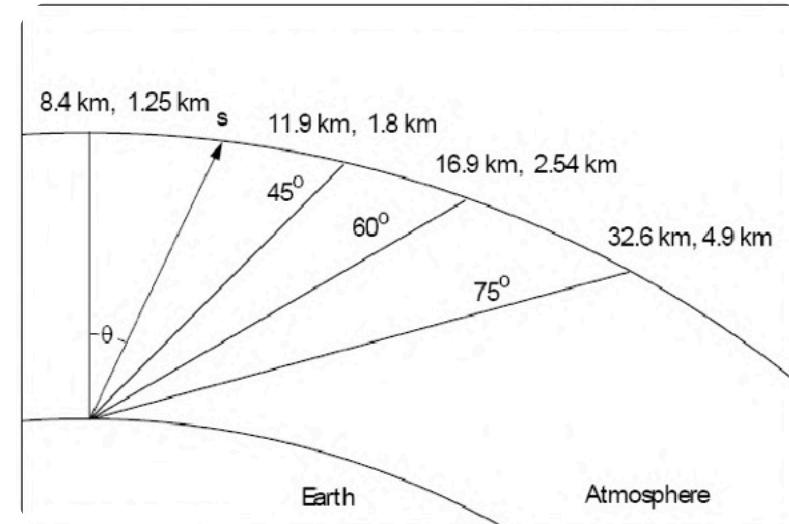

Undege, Cagatay. (2009). Modeling daytime and night illumination.

This effect is wavelength-dependent and varies with atmospheric conditions and the observer's zenith angle.

Extinction Coefficient and Airmass

The Extinction Equation (Bouguer's Relation)

$$m(\lambda, Z) = m_0(\lambda) + 1.086 \cdot k_\lambda \cdot \sec(Z)$$


k_λ = Extinction Coefficient

$m(\lambda, z)$ = Observed Magnitude

$\sec(Z)$ = Airmass in Atmosphere

Z = Zenith Angle = $90^\circ -$ Altitude

Equation Reference : Stalin et. al

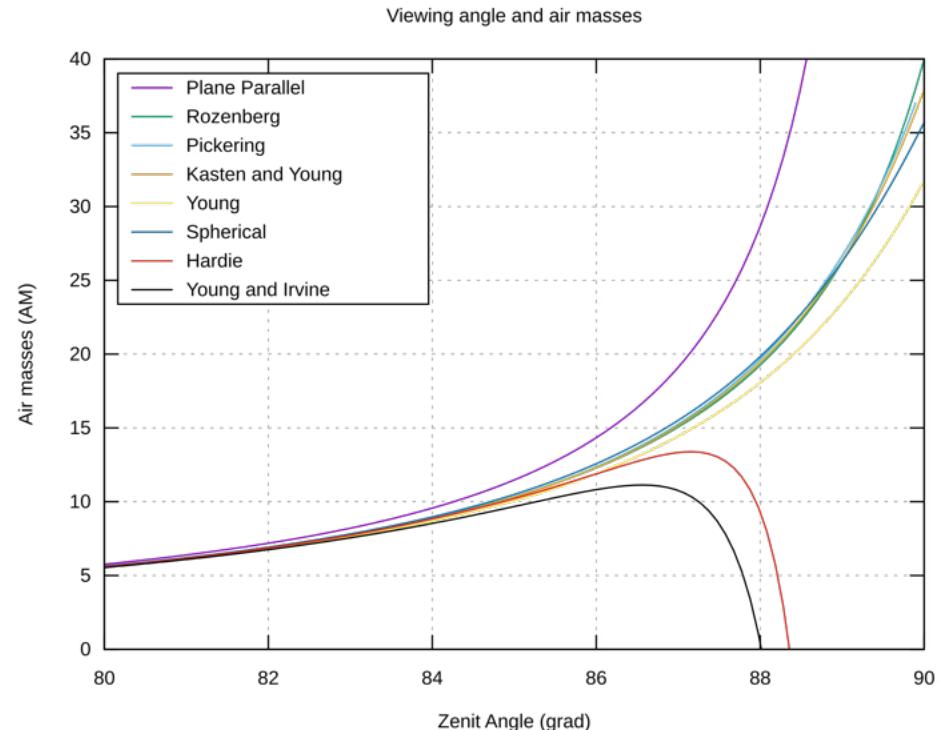

By Amishaa - Own work, CC BY-SA 4.0,
<https://commons.wikimedia.org/w/index.php?curid=127852654>

Part II: Atmospheric Extinction coefficient calculation

Extinction coefficient results from Stalin et al. (2008)

Table 1. The calculated and measured values of the extinction coefficients in mag/airmass at Hanle

| Filter | λ_{0A} | k_{Ray} | k_{aer} | k_{oz} | k_{sum} | Observed |
|--------|----------------|-----------|-----------|----------|-----------|-----------------|
| U | 3650 | 0.3307 | 0.0099 | 0.0008 | 0.3414 | 0.36 ± 0.07 |
| B | 4400 | 0.1522 | 0.0085 | 0.0005 | 0.1612 | 0.21 ± 0.04 |
| V | 5500 | 0.0610 | 0.0071 | 0.0262 | 0.0943 | 0.12 ± 0.04 |
| R | 7000 | 0.0229 | 0.0059 | 0.0036 | 0.0324 | 0.09 ± 0.04 |
| I | 8800 | 0.0091 | 0.0049 | 0.0000 | 0.0140 | 0.05 ± 0.03 |

NOTE: The paper has data for UBVRI filters, however, GIT operates with UGRIZ (SDSS) filters

Part II: Atmospheric Extinction coefficient calculation

Processing Pipeline



Target Selection

Select a dense region in the sky with a large number of stars, like a star cluster with a culmination point at high altitude



Data Acquisition

Take exposures of the targets uniformly spaced in airmass



Plotting Magnitude Variation

Plot observed magnitude vs. airmass for each filter band.




Extinction Coefficient Calculation

The slope of the linear fit determines the atmospheric extinction coefficient (k_λ)


Part II: Atmospheric Extinction coefficient calculation

Target - NGC 1039 Spiral Cluster

Selected 20 (A-T) stars for cluster method to determine atmospheric coefficient

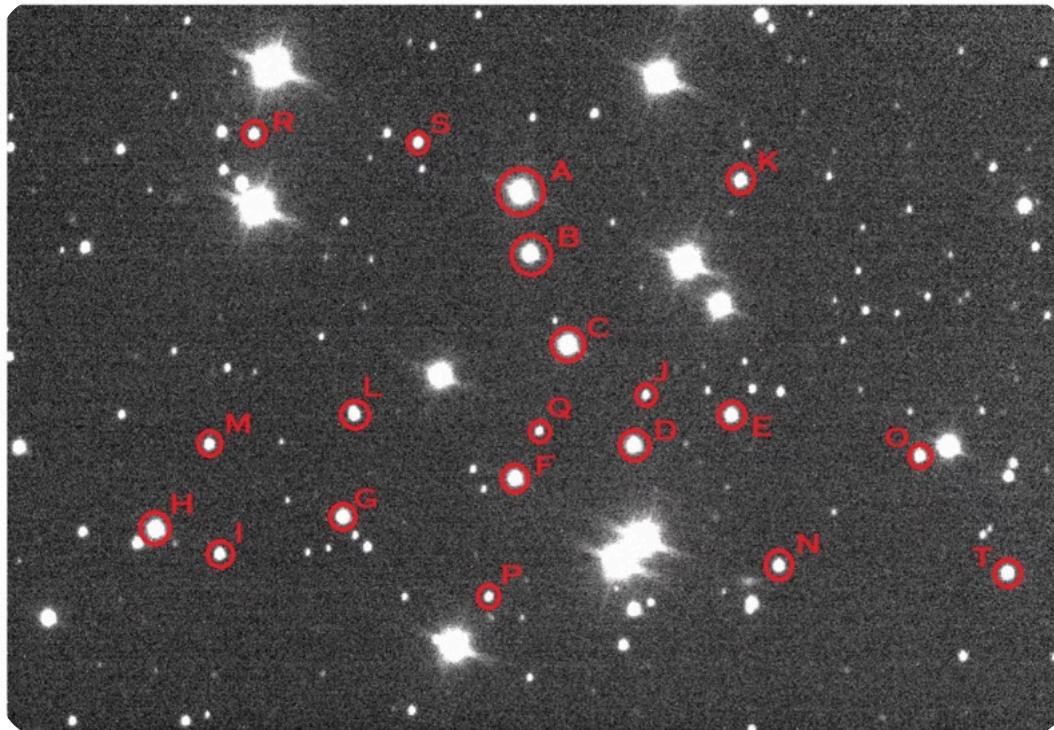



g-band Image of the star cluster

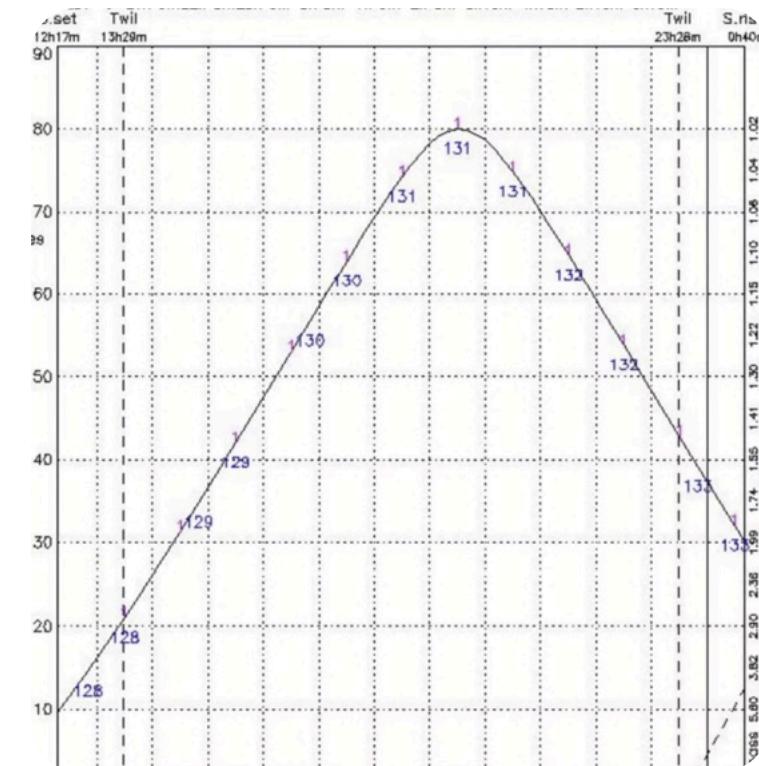

Altitude variation of the target

Part II: Atmospheric Extinction coefficient calculation


Extinction coefficient plots for UGRIZ filters

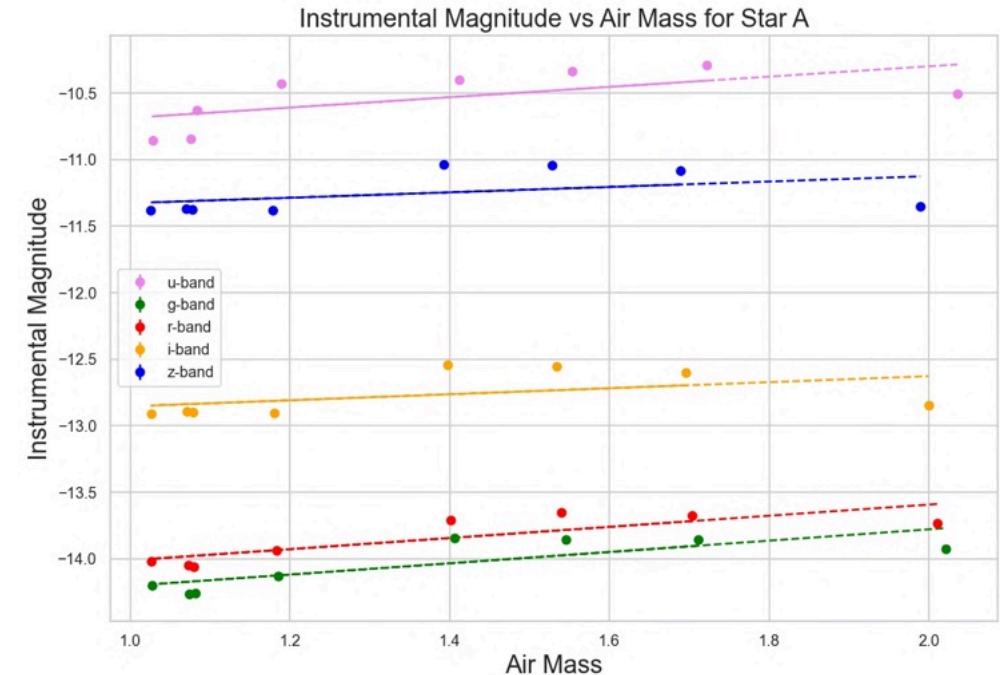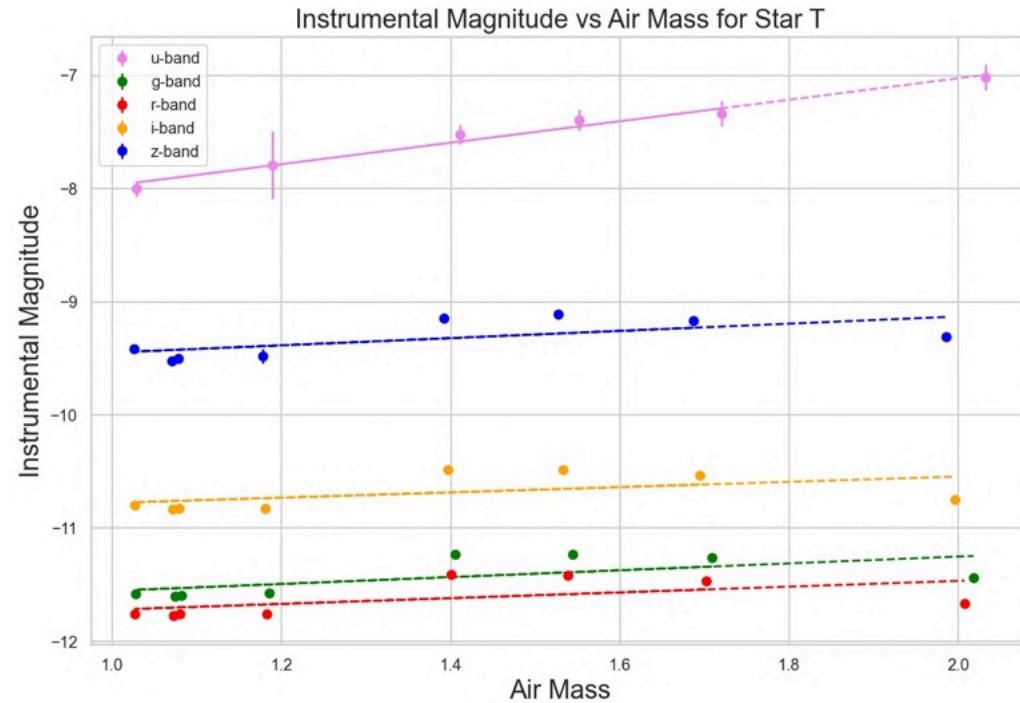

'Note: Error bars are present, albeit very small to physically see due to the y-axis scale

Part II: Atmospheric Extinction coefficient calculation


Variation of Extinction Coefficient Across Filters

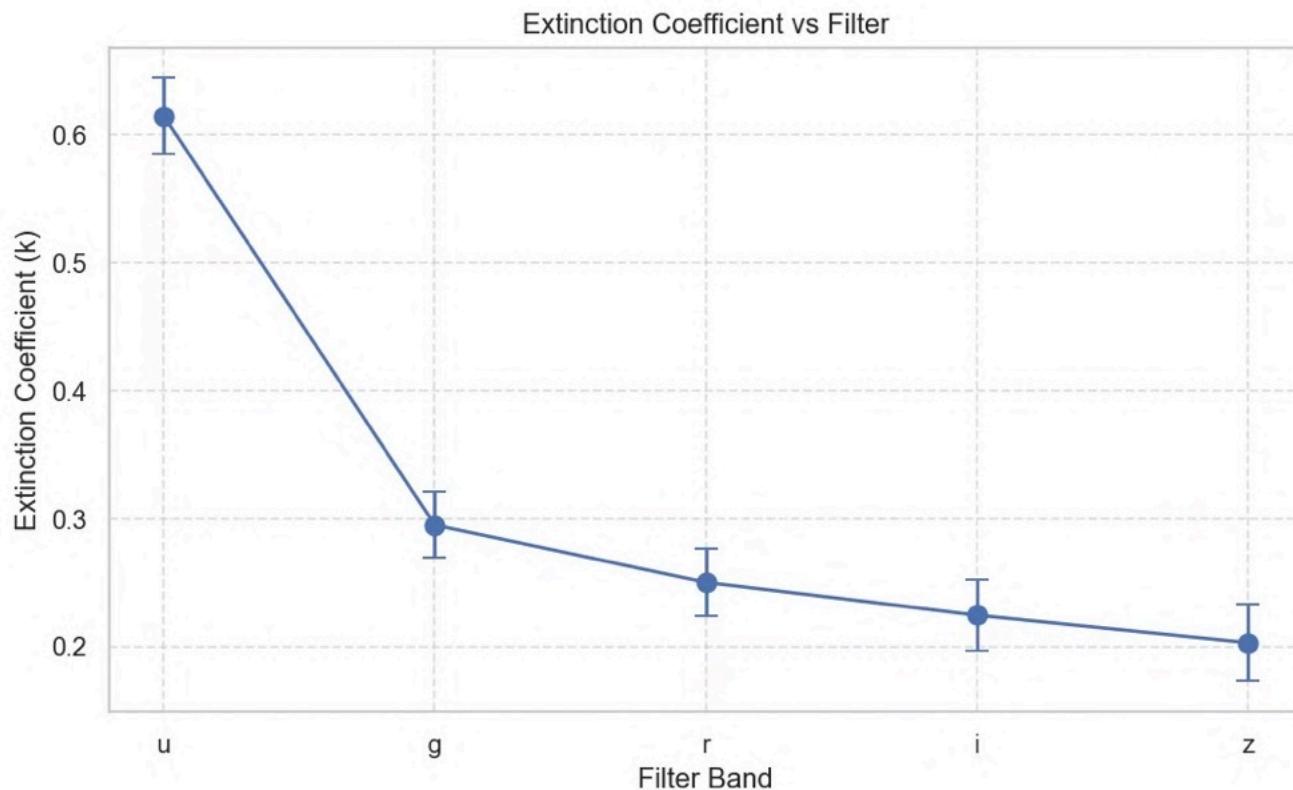

| Band | Average Extinction Coefficient | Error |
|------|--------------------------------|--------|
| u | 0.6149 | 0.0299 |
| g | 0.2951 | 0.0260 |
| r | 0.2502 | 0.0266 |
| i | 0.2246 | 0.0275 |
| z | 0.2030 | 0.0299 |

Part III: Sources of Error

→ I - CMOS Sensor Noise

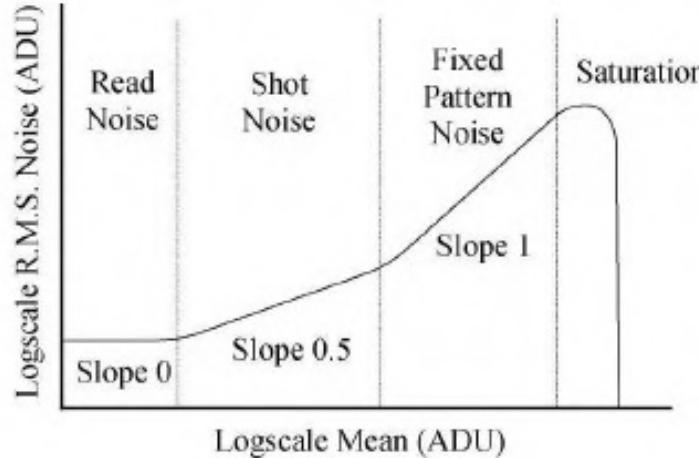


1. **Intrinsic sensor noise** (Read noise, shot noise, fixed pattern noise) - fundamental limitations in CMOS image sensors
2. **Vignetting and dust motes in flat fields** - spatial non-uniformity rejected by selecting central ROI (700×1000 pixels)
3. **Hot and cold pixels in dark frames** - outlier pixels rejected by 3σ sigma clipping
4. **Temperature-dependent dark current** - doubles every $5-8^\circ\text{C}$, requires temperature stability ($\pm 0.1^\circ\text{C}$)

Stewart, Graeme & Bates, Richard & Blue, A & Clark, A & Dhesi, S. & Maneuski, Dima & Marchal, Julien & Steadman, P & Tartoni, N & Turchetta, Renato. (2011). Comparison of a CCD and an APS for soft X-ray diffraction. *Journal of Instrumentation*. 6. C12062. 10.1088/1748-0221/6/12/C12062.

Part III: Sources of Error

→ II - Atmospheric conditions

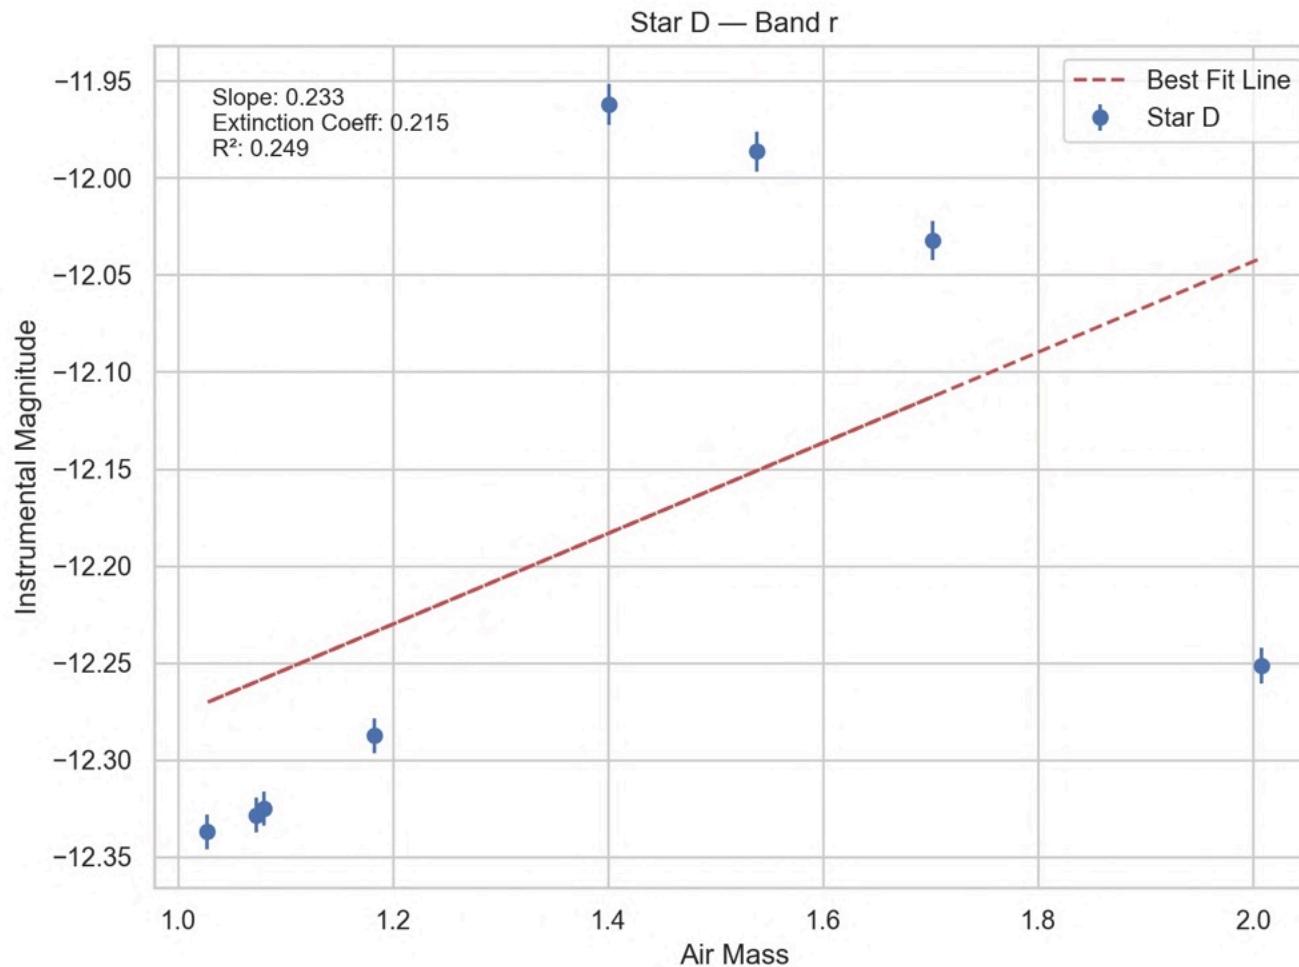

We see that over the air mass of 1.4 (below the altitude of 45 degrees), the stars become noticeably fainter - this could be attributed to:

1. Atmospheric seeing effects, Sky transparency changes (thin clouds/haze)
2. Real physical variations in atmospheric conditions (changing aerosol content, water vapor, temperature)
3. Variable airglow contributions to sky brightness

Challenges Faced

1. The first epoch of data we received had unusable images -
 - At one altitude, the dome failed to open, resulting in no visible stars.
 - At another altitude, a tracking issue caused all stars to appear as trails.
 - Two altitudes (77° and 78°) were too close to each other, effectively giving only a single data point instead of two distinct ones.
 - The u-band images were underexposed, leading to fields with nearly no stars in them.
2. In CMOS Characterization, we surprisingly got a high gain compared to the datasheet, which also resulted in increased dark current.

Page 17

References

1. Stalin et al. (2008) <https://arxiv.org/pdf/0809.1745>
2. [Benn, C.R., & Ellison, S.C., 1998, New Astronomy Review 42, 503](#)
3. [Determination of the STIS CCD Gain](#)
4. [CMOS Sensor \(of GIT's secondary camera\) Datasheet¹ - https://diffractionlimited.com/wp-content/uploads/2024/12/Diffraction-Data-Sheet-STC-428-FW.pdf](#)
5. CMOS Characterization & Noise Reduction - https://isl.stanford.edu/~abbas/group/papers_and_pub/hui_thesis.pdf
6. Hayes, D. S., & Latham, D. W. (1975). [A rediscussion of the atmospheric extinction and the absolute spectral - energy distribution of Vega. The Astrophysical Journal](#), 197, 593-601

GitHub Repo of raw & processed data, code and outputs:

The screenshot shows a GitHub repository card for 'The_GARAMA_Project' by user 'ramanan849'. The card includes the repository name, a star icon indicating 2 stars, the owner's profile picture, and a brief description: 'Atmospheric Extinction Coefficient Calculation and CMOS Characterization'. To the right, there is a link to the GitHub page for the repository, which also displays the same information.

ramanan849 / [The_GARAMA_Project](#) 2 ★

Atmospheric Extinction Coefficient Calculation and CMOS Characterization

 ramanan849

GutHub

[GitHub – ramanan849/The_GARAMA_Project: Atmospheric Extinction C...](#)

Atmospheric Extinction Coefficient Calculation and CMOS Characterization
ramanan849/The_GARAMA_Project


Datasheet of CMOS Sensor



TECHNICAL SPECIFICATIONS

| | |
|------------------------------|---|
| A/D Converter | 12-bit with High Gain / Low Gain modes |
| Binning Modes | 1x1, 2x2 |
| Computer Interface | USB 3.0 (USB 2.0 compatible) |
| Cooling Delta | Approximately 30°C |
| Dark Current | 0.1 e-/p/s at -5°C |
| Exposure | 0.001 – 3600 seconds |
| Filter Size | 36mm / 1.25" |
| Filter Wheel Option | STC-428-FW includes 8-slot carousel |
| Imaging / Pixel Array | 3208 x 2200 pixels |
| Imaging Sensor | Sony IMX428 CMOS sensor |
| OS Compatibility | Windows 10 or 11 |
| Peak QE | 78% typical |
| Pixel Size | 4.5 x 4.5 µm |
| Power | 12VDC, 4A max |
| Read Noise (Typical) | 1.9 e- High Gain, 2.5 e- Med Gain, 5 e- Low Gain |
| Sensor Size | 14.4 mm X 9.9 mm |
| Shutter | Global Shutter (electronic), Opaque Slot on Filter Wheel for Dark Frames, Optional Mechanical Dark Shutter |
| Temperature Regulation | Yes |
| SENSOR SPECIFICATIONS | |
| 17.6 mm diagonal | 80 dB dynamic range |
| Typical QE: | <ul style="list-style-type: none">Red (635-700 nm) ~ 63%Green (520-560 nm) ~ 78%Blue (450-490 nm) ~ 75% |

SBIG® STC-428-Series

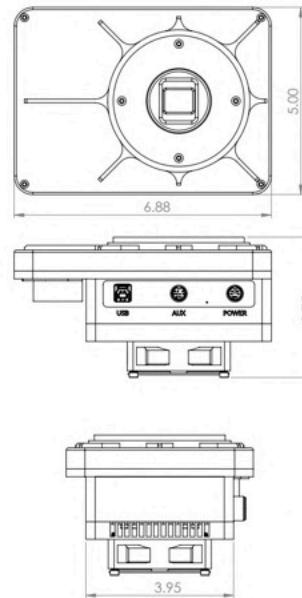

Thank You!