



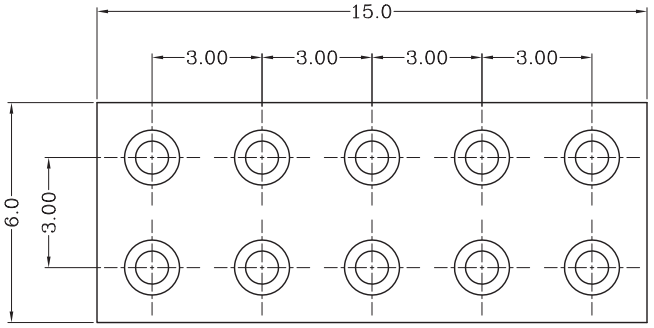




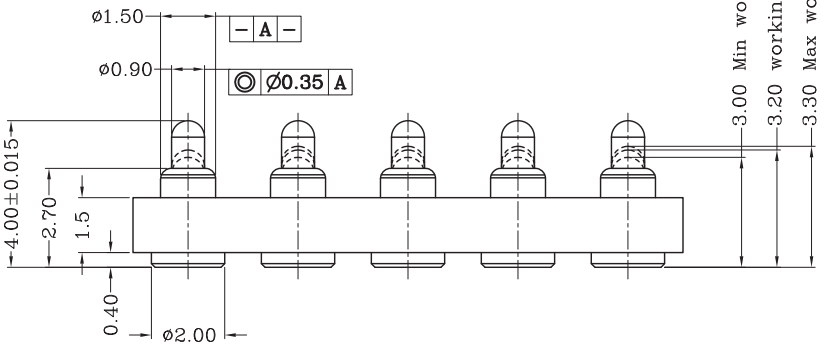



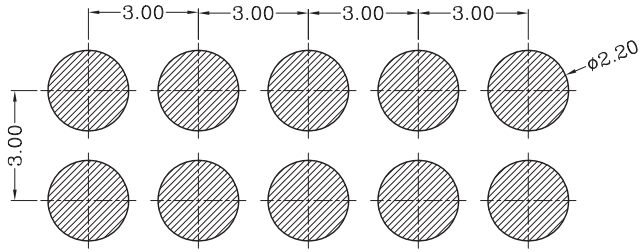

RECOMMEND PCB LAYOUT(TOP VIEW)

Notes:
1 Dimensions shall be interpreted per ASME Y14.5M
2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards
<2.2>Warning:Working height are not permitted to be less than Min working height
3 Electrical performance
<3.1>Current rating: 2.0A
<3.2>Voltage rating: 36VAC/DC
<3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
<3.4>Insulation Resistance:100MOhm minimum
4 Environmental performance
<4.1> RoHS compliant
<4.2>Operating Temperature range:−40°C~+85°C
<4.3>Withstanding High Temperature:260°C/10Sec
5 Packaging:Carrier tape

Table 1:Mechanical performance		
Working Height	3.20mm	85gf Min
Durability	10000 Cycles Min.	

Item	Part Name	Q'TY	Material	Finish
4	Body	8pcs	Leaded Brass	Au 0.1um min plated over 1.4um min Ni
3	Plunger	8pcs	Leaded Brass	Au 0.4um min plated over 1.4um min Ni
2	Spring	8pcs	Stainless steel wire	−−−−−−−−
1	Housing	1pcs	High temp.Plastic; UL94 V−0 Color Black	−−−−−−−−

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE:---	First angle projection
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

EC-300059901001