







Product NO.		RHT-605-5472			
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
RL 0	First issue	Gavin	2022/03/24	JTM.KING	

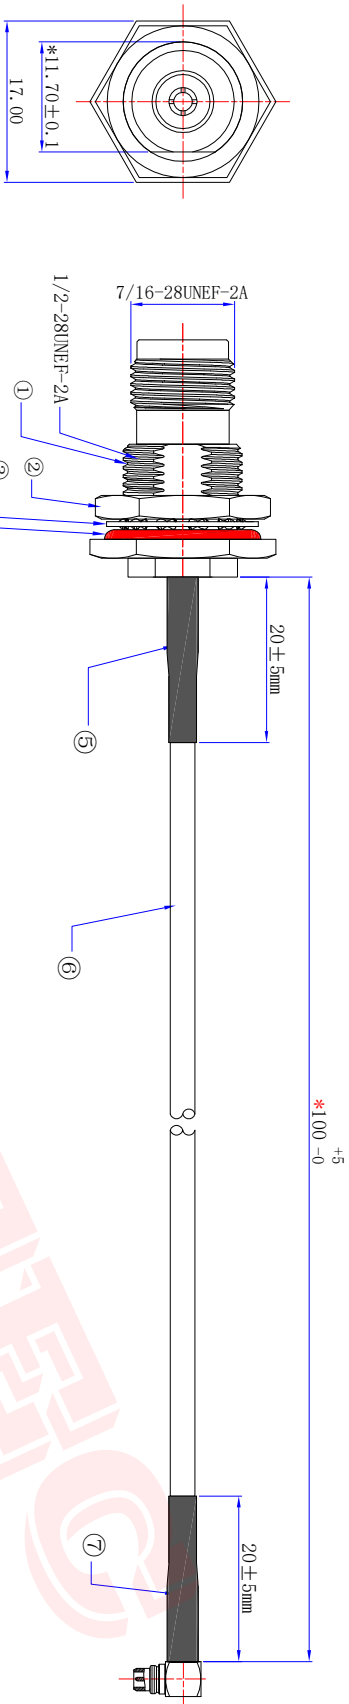

RECOMMENDED
MOUNTING HOLE

Specifications:
IMPEDANCE: 50 Ohms
Frequency range:0~3GHz
Working voltage:500V rms @ sea level
Insulation resistance:5000 MOhms min
Temperature range:-20℃ TO +105℃

RENHOTEC GROUP												
 仁昊伟业 RENHOTEC												
			-TOLERANCES- UNLESS OTHERWISE SPECIFIED									
			UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.35mm 30 –120mm ± 0.30mm									
			PART DESCRIPTION: WATERPROOF TNC JACK TO MMCX PLUG FOR RG174 CABLE									
Appr: JIM KING			P/N: RHT-605-5472									
Check:			Date		Scale		Unit		Type		Page	
Draw: Gavin			2022.03.24		Free		MM		Z		1/1	
E												
7		R/A MMCX Plug		Brass, Gold plated		1						
6		Cable		RG174 Jacket: PVC Black, OD:2.6±0.2mm		1						
5		Heat shrinkable tube		Black, L=20mm		2						
4		Nut		Brass, Nickel plated		1						
3		Gasket		Iron, Nickel plated		1						
2		O-Ring		Rubber, Black		1						
1		Waterproof TNC Jack		Brass, Nickel plated		1						
No.		PART NAME		DESCRIPTION		QTY						