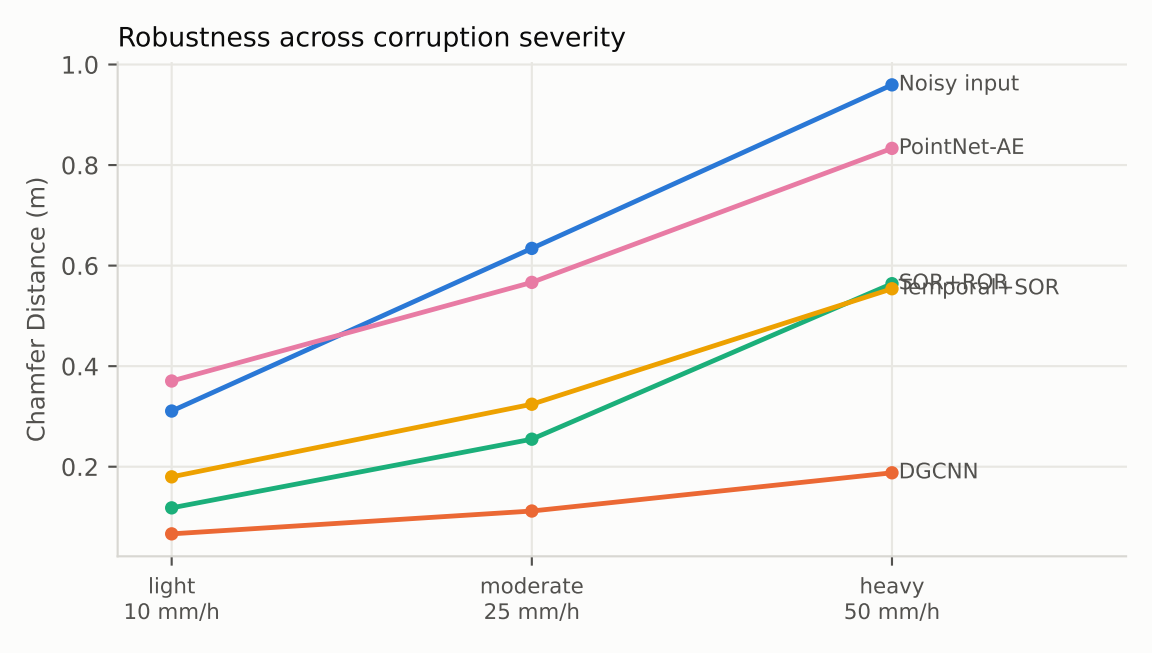
Robustness across corruption severity
Chamfer Distance (m)
1.0
0.8
0.6
0.4
0.2
Noisy input
PointNet-AE
SOR + ROR
Temporal + SOR
DGCNN
light
10 mm/h
moderate
25 mm/h
heavy
50 mm/h