

INTRODUCTION

1.1 Hypothesis

A smart traffic management system utilizing sensor data, communication and automated algorithms is to be developed to keep traffic flowing more smoothly. The aim is to optimally control the duration of green or red light for a specific traffic light at an intersection. The traffic signals should not flash the same stretch of green or red all the time, but should depend on the number of cars present. When traffic is heavy in one direction, the green lights should stay on longer; less traffic should mean the red lights should be on for longer time interval. This solution is expected to eliminate inefficiencies at intersections and minimize the cost of commuting and pollution.

1.2 Motivation

In 2014, 54% of the total global population was urban residents. The prediction was a growth of nearly 2% each year until 2020 leading to more pressure on the transportation system of cities. Additionally, the high cost of accommodation in business districts lead to urban employees living far away from their place of work/education and therefore having to commute back and forth between their place of residence and their place of work. More vehicles moving need to be accommodated over a

LITERATURE REVIEW

2.1 About IoT

The Internet of Things (IoT), also sometimes referred to as the Internet of Everything (IoE), consists of all the web-enabled devices that collect, send and act on data they acquire from their surrounding environments using embedded sensors, processors and communication hardware. These devices, often called "connected" or "smart" devices, can sometimes talk to other related devices, a process called machine-to-machine (M2M) communication, and act on the information they get from one another. Humans can interact with the gadgets to set them up, give them instructions or access the data, but the devices do most of the work on their own without human intervention. Their existence has been made possible by all the tiny mobile components that are available these days, as well as the always-online nature of our home and business networks. Connected devices also generate massive amounts of Internet traffic, including loads of data that can be used to make the devices useful, but can also be mined for other purposes. All this new data, and the Internet-accessible nature of the devices, raises both privacy and security concerns. But this technology allows for a level of real-time information that we have never had before. We can monitor our homes and families remotely to keep them safe. Businesses can improve processes to increase productivity and reduce material waste and unforeseen downtime. Sensors in city infrastructure can help reduce road congestion and warn us when infrastructure is in danger of crumbling. Gadgets

2.2 Advantages and Disadvantages of IoT

2.2.1 Advantages

Communication: IoT encourages the communication between devices, also famously known as Machine-to-Machine (M2M) communication. Because of this, the physical devices are able to stay connected and hence the total transparency is available with lesser inefficiencies and greater quality.

Automation and Control: Due to physical objects getting connected and controlled digitally and centrally with wireless infrastructure, there is a large amount of automation and control in the workings. Without human intervention, the machines are able to communicate with each other leading to faster and timely output.

Information: It is obvious that having more information helps making better decisions. Whether it is mundane decisions as needing to know what to buy at the grocery store or if your company has enough widgets and supplies, knowledge is power and more knowledge is better.

Monitor: The second most obvious advantage of IoT is monitoring. Knowing the exact quantity of supplies or the air quality in your home, can further provide more information that could not have previously been collected easily. For instance, knowing that you are low on milk or printer ink could save you another trip to the store in the near future. Furthermore, monitoring the expiration of products can and will improve safety.

Time: As hinted in the previous examples, the amount of time saved because of IoT could be quite large. And in today's modern life, we all could use more time.

Money: The biggest advantage of IoT is saving money. If the price of the tagging and monitoring equipment is less than the amount of money saved, then the Internet of Things will be very widely adopted. IoT fundamentally proves to be very helpful

2.2.2 Disadvantages

Compatibility: Currently, there is no international standard of compatibility for the tagging and monitoring equipment. I believe this disadvantage is the most easy to overcome. The manufacturing companies of these equipment just need to agree to a standard, such as Bluetooth, USB, etc. This is nothing new or innovative needed.

Complexity: As with all complex systems, there are more opportunities of failure. With the Internet of Things, failures could sky rocket. For instance, let's say that both you and your spouse each get a message saying that your milk has expired, and both of you stop at a store on your way home, and you both purchase milk. As a result, you and your spouse have purchased twice the amount that you both need. Or maybe a bug in the software ends up automatically ordering a new ink cartridge for your printer each and every hour for a few days, or at least after each power failure, when you only need a single replacement.

15 / 37

Privacy/Security: With all of this IoT data being transmitted, the risk of losing privacy increases. For instance, how well encrypted will the data be kept and transmitted with? Do you want your neighbors or employers to know what medications that you are taking or your financial situation? **Safety:** As all the household appliances, industrial machinery, public sector services like water supply and transport, and many other devices all are connected to the Internet, a lot of information

2.3 IoT in Traffic Management

Traffic management is one of the biggest infrastructure hurdles faced by developing countries today. Developed countries and smart cities are already using IoT and to their advantage to minimize issues related to traffic. The culture of the car has been cultivated speedily among people in all types of nations. In most cities, it is common for people to prefer riding their own vehicles no matter how good or bad the public transportation is or considering how much time and money is it going to take for them to reach their destination.

3.1 Hardware Components

1. **Microcontroller (*Arduino Mega 2560*):** The *Arduino Mega 2560* is a microcontroller board based on the *Atmega 2560*. It has 54 digital input/output pins (of which 15 can be used as PWM outputs), 16 analog inputs, 4 UARTs (hardware serial ports), a 16 MHz crystal oscillator, a USB connection, a power jack, an ICSP header, and a reset button. It contains everything needed to support the microcontroller; simply connect it to a computer with a USB cable or power it with a AC-to-DC adapter or battery to get started. The Mega 2560 board is compatible with most shields designed for the Uno and the former boards Duemilanove or Diecimila.



FIGURE 3.2: Arduino Uno.

3. LEDs: LEDs are used for the purpose of signaling according to the traffic condition.





FIGURE 3.4: IR Sensors.

5. Jumper Wires: It is used to connect the components to each other.



3.2 Software Requirement

1. Arduino IDE: The Arduino integrated development environment (IDE) is a cross-platform application (for Windows, MacOS, Linux) that is written in the programming language Java. It is used to write and upload programs to Arduino board.

The source code for the IDE is released under the GNU General Public License, version 2. The Arduino IDE supports the languages C and C++ using special rules of code structuring. The Arduino IDE supplies a software library from the Wiring project, which provides many common input and output procedures.

2. Proteus Design Suite: The Proteus Design Suite is a proprietary software tool suite used primarily for electronic design automation. The software is used mainly by electronic design engineers and technicians to create schematics and electronic prints for manufacturing printed circuit boards.

4.1 Existing System

The existing traffic system is generally controlled by the traffic police. The main drawback of this system controlled by the traffic police is that the system is not smart enough to deal with the traffic congestion. The traffic police official can either block a road for more amount of time or let the vehicles on another road pass by i.e. the decision making may not be smart enough and it entirely depends on the official's decision. Moreover, even if traffic lights are used the time interval for which the vehicles will be showed green or red signal is fixed. Therefore, it may not be able to solve the problem of traffic congestion. In India, it has been seen that even after the presence of traffic lights, traffic police officials are on duty, which means that in this system more manpower is required and it is not economical in nature.(Viswanathan and Santhanam, 2013)

4.3 Method

In this proposed system, the traffic lights are LEDs and the car counting sensor is an ultrasonic sensor. Both blocks are connected to a Microcontroller using physical wires. The Microcontroller is the traffic light controller which receives the collected sensor data and manages the traffic lights by switching between green, yellow and red. The Microcontroller computes the number of cars in the street of the intersection it is monitoring based on the distances measured by the ultrasonic sensor and the timing between those measurements. The Microcontroller then sends the number of cars every minute to the local server. This communication is done using the Microcontroller serial port. The local server exchanges the data received with the cloud server in order to better predict the changes in timings of the traffic light. This communication is done using Wi-Fi. More specifically, the cloud server uses an equation that takes the data received (number of cars) as input then determines the time interval of LEDs needed for a smooth traffic flow. This calculated time is then compared to the current actual time of the LEDs (this data is saved in a database on the cloud server). The server then comes up with a decision. If the current actual green time is less than the calculated time, the decision is to increase the green time, else to decrease the green time.(Chandana K K, 2013)

4.3.1 A View of Signals at Different Lanes

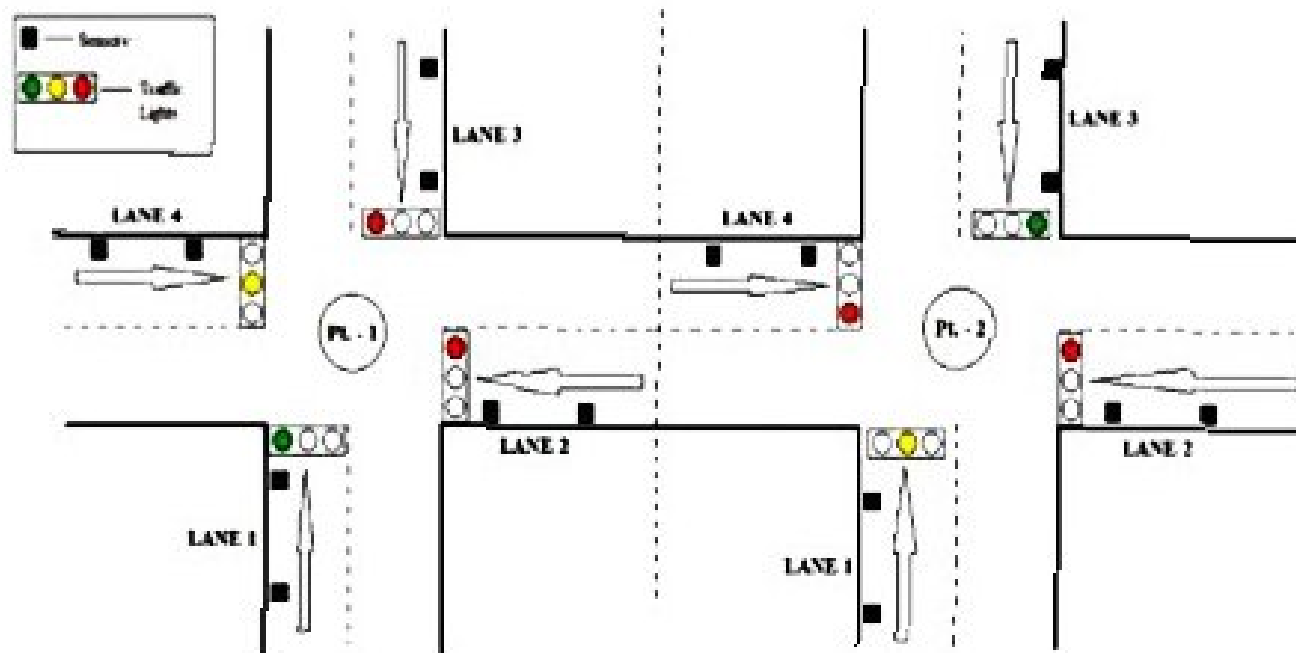


FIGURE 4.1: Control of previous Intersection

In the above figure, in Pt. - 1, LANE 1 is currently open with green signal and LANE 4 is ready with an yellow signal but LANE 2 and LANE 3 are blocked. In LANE 3, vehicle count is already greater than the threshold value, therefore the road coming to LANE 2 of Pt. - 1 is blocked in the Pt. - 2 itself. Thus re-routing them through another lanes. (Assuming that Pt. - 1 is the current intersection and Pt. - 2 is the previous intersection.)

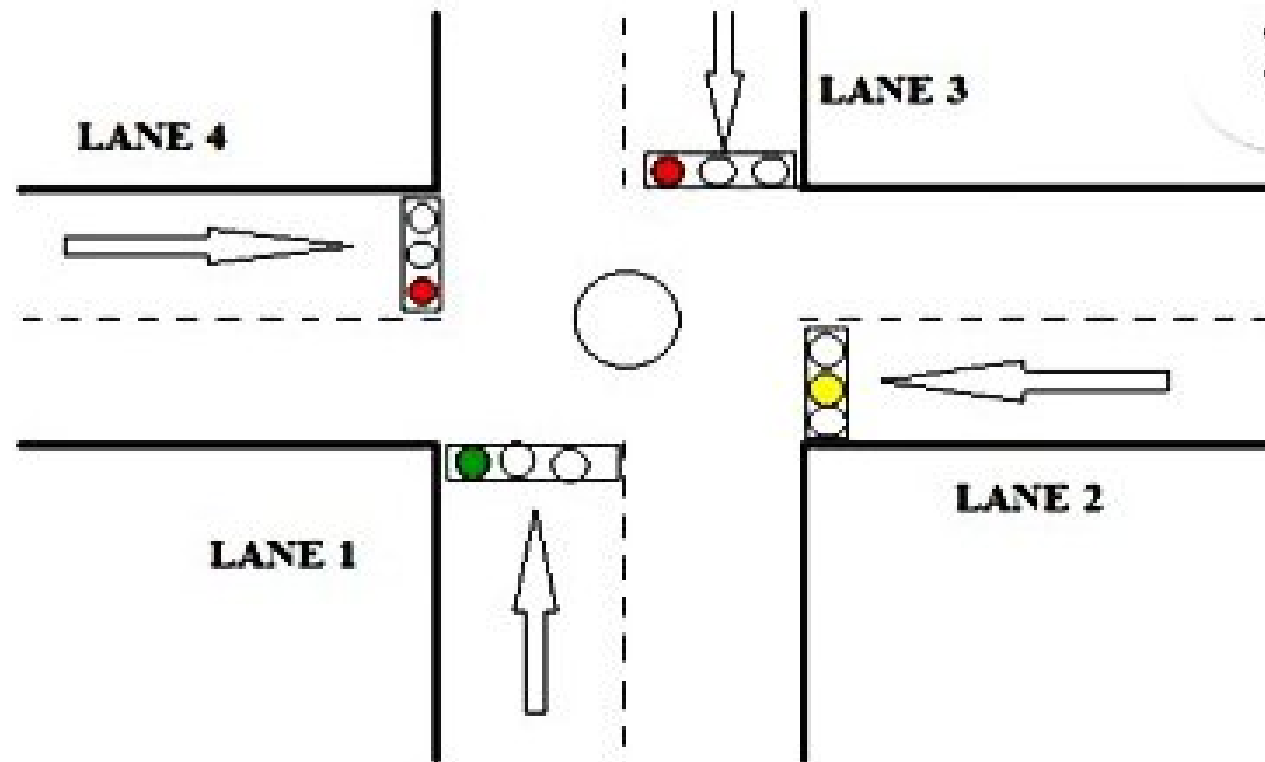


FIGURE 4.2: Signal at Lane 1

In the above figure, Lane 1 is open with green signal and other lanes are closed with red signal.

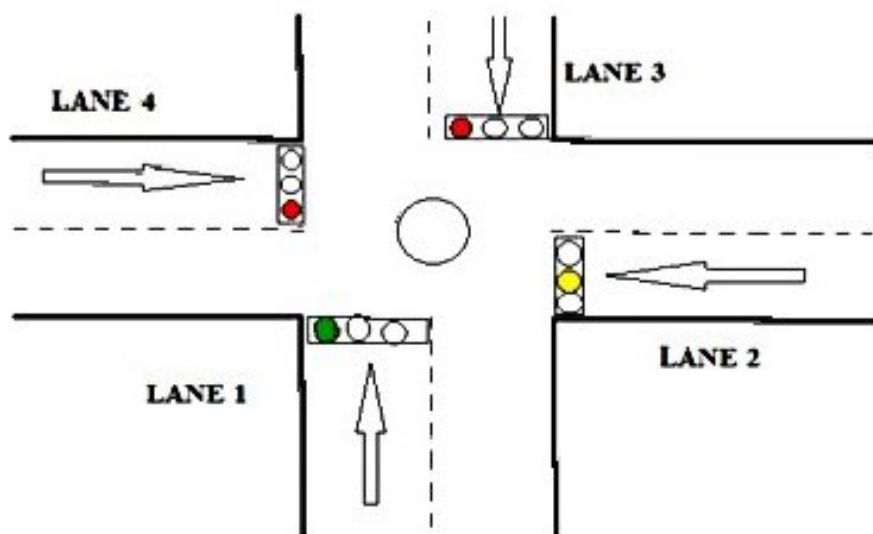


FIGURE 4.2: Signal at Lane 1

In the above figure, Lane 1 is open with green signal and other lanes are closed with red signal.

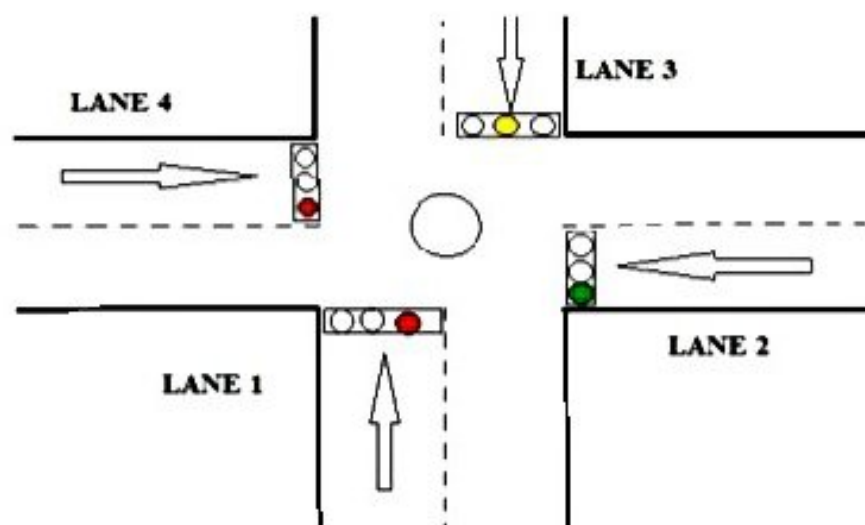


FIGURE 4.3: Signal at Lane 2

In the above figure, Lane 2 is open with green signal and other lanes are closed with red signal.



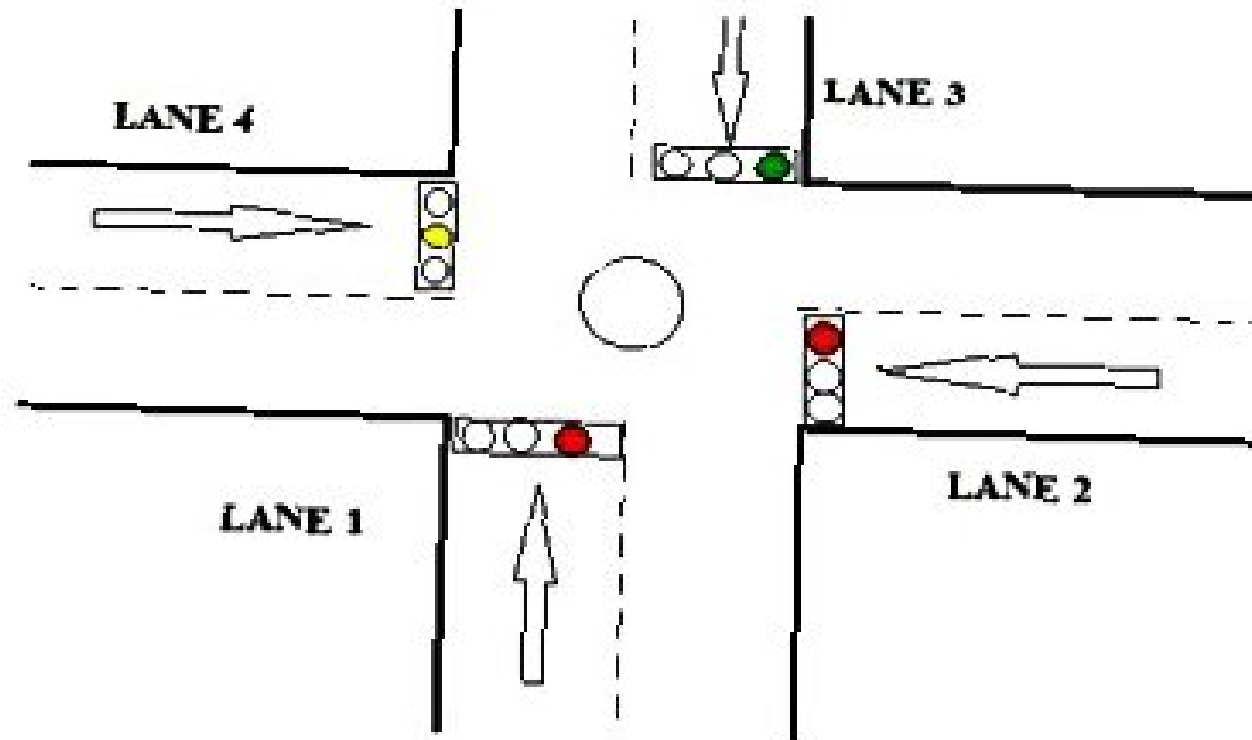


FIGURE 4.4: Signal at Lane 3

In the above figure, Lane 3 is open with green signal and other lanes are closed with red signal and after that Lane 4 will get the green signal automatically.

4.4.1 Flowchart

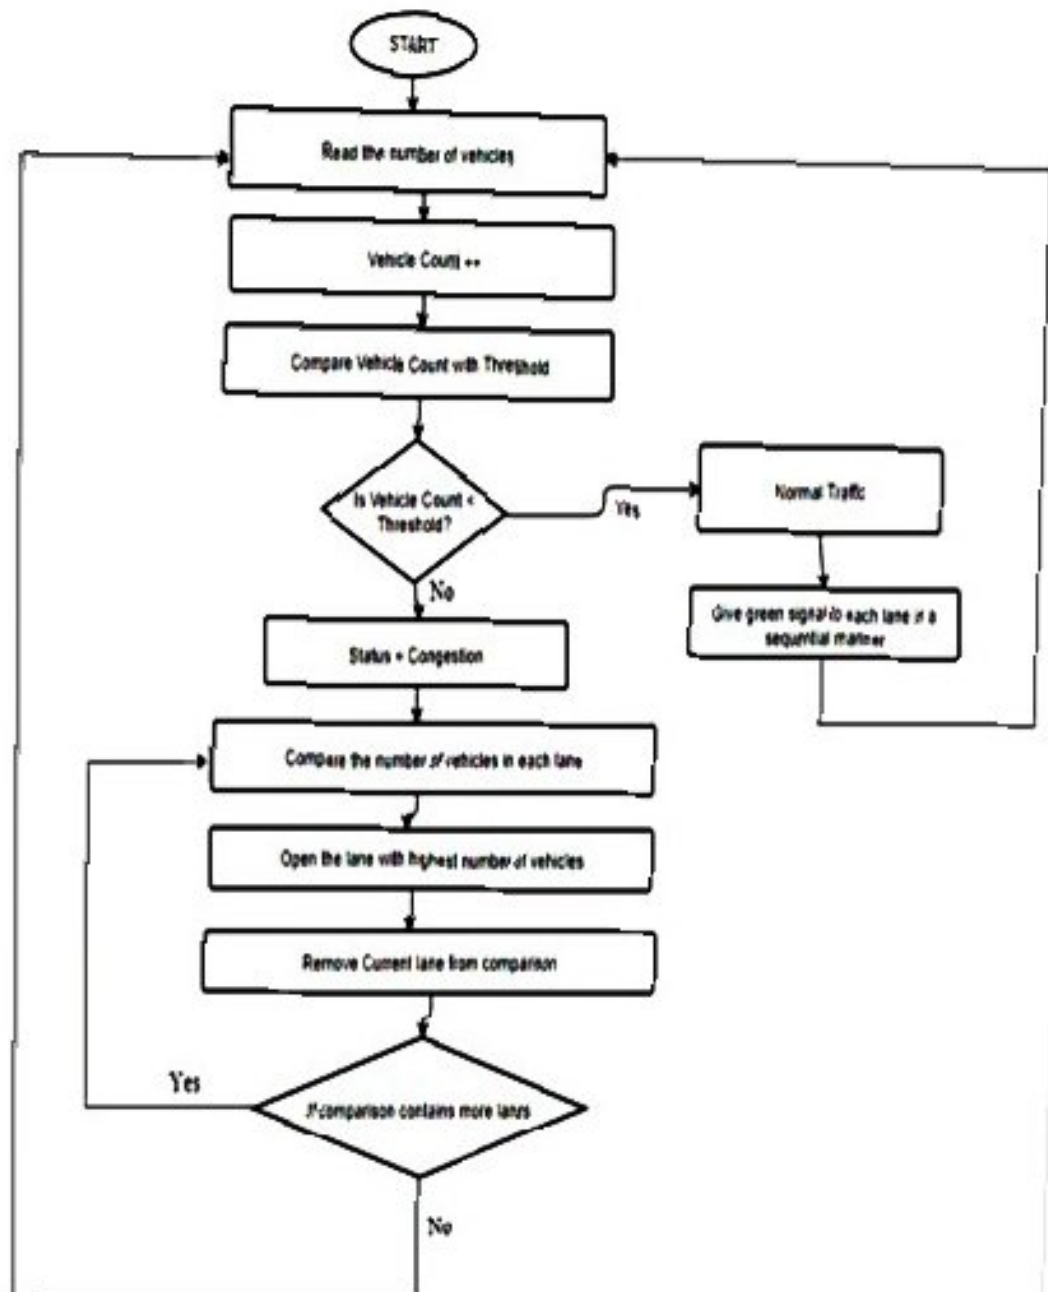

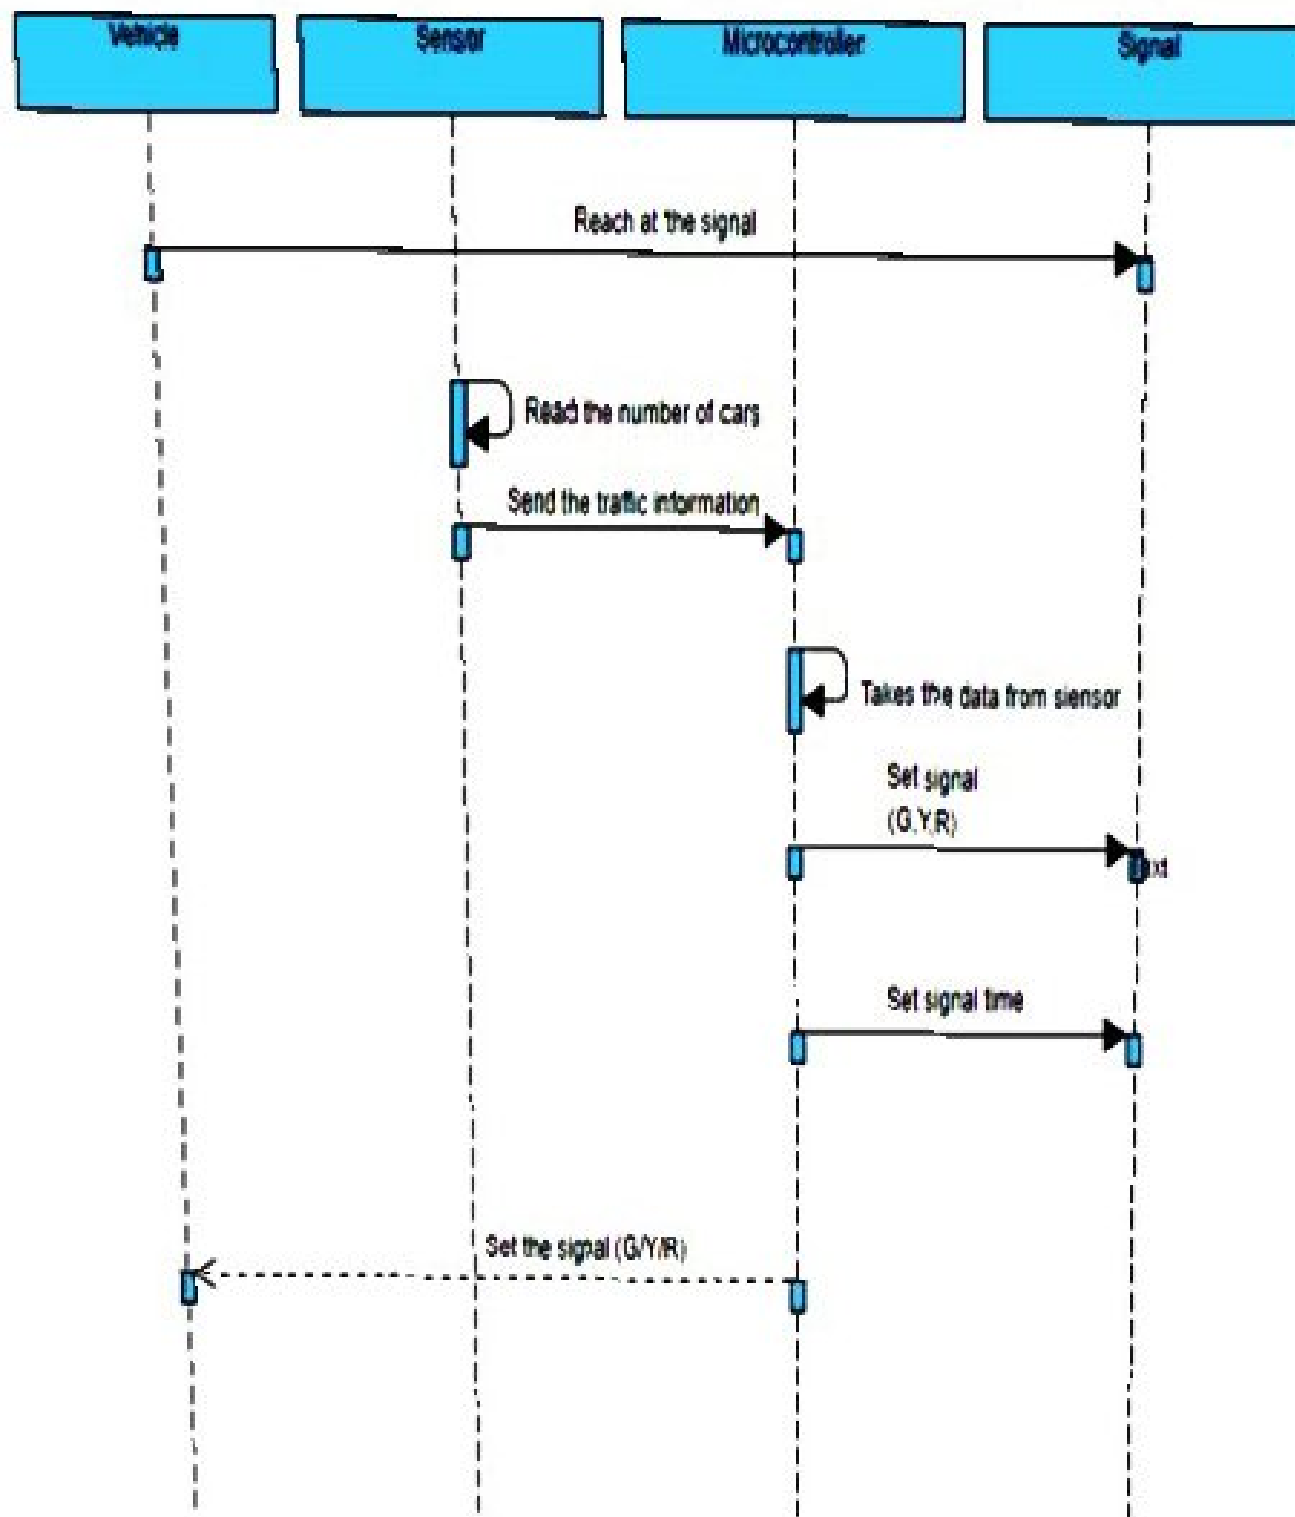

4.4.3 Use Case Diagram

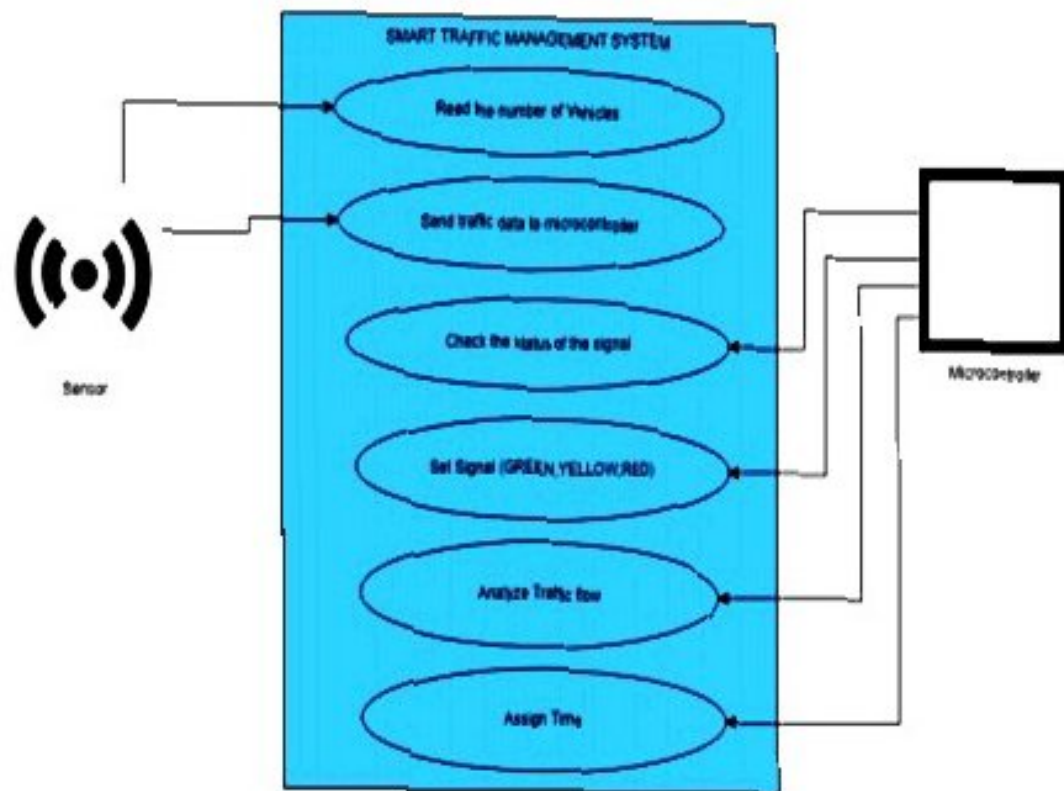


FIGURE 4.7: Use Case Diagram.

4.5 Algorithms

4.5.1 Vehicle Counter Algorithm

Assuming the objects detected by the IR Sensors to be vehicles,

```
int counter = 0;
```

```
int hitObject = false;
```

```
int val ;
```

Step 1: Read value from sensor (val). Sensor gives output 0 if car is detected and 1 if no car is detected.

4.5.2 Traffic Control Algorithm

No. of sensors = 8 and are denoted by S1, S2, S3, S4, S5, S6, S7, S8

No. of cars in Lane 1 (N1) = S1 - S2

No. of cars in Lane 2 (N2) = S3 - S4

No. of cars in Lane 3 (N3) = S5 - S6

No. of cars in Lane 4 (N4) = S7 - S8

$L_i = (L1, L2, L3, L4)$, $N_i = (N1, N2, N3, N4)$, $T_i = (T1, T2, T3, T4)$

Step 1: Start

Step 2: Sensors will read the no. of vehicles on each lane (i.e. L1, L2, L3, L4)

Step 3: if (Vehicle Count < Threshold)

Then status = Normal traffic. Turn on the green signal for all the lanes one after another in a sequential manner (L1-L2-L3-L4). When signal is green for one lane, the others will remain red.

Step 4: else status = congestion.

Step 5: COMPARE (N1, N2, N3, N4), Select the highest of the four (say N_i), turn on green signal for that lane (say L_i) for time (T_i). When time T_i ends, turn on the red signal.

Step 6: COMPARE (N2, N3, N4), Select the highest of the three (say N_i), turn on green signal for that lane (say L_i) for time (T_i). When time T_i ends, turn on the red signal.

Step 7: COMPARE (N3, N4), Select the highest of the two (say N_i), turn on green signal for that lane (say L_i) for time (T_i). When time T_i ends, turn on the red signal.

Step 8: The last remaining lane automatically gets selected and it is given the green signal for time T_i .

Step 9: Jump to Step 3.

RESULTS AND ANALYSIS

5.1 Results and Analysis

The proposed system helps in better time based monitoring and thus has certain advantages over the existing system like minimizing number of accidents, reducing fuel cost and is remotely controllable etc.

The proposed system is designed in such a way that it will be able to control the traffic congestion as well as track the number of vehicles. The administrator of the system can access local server in order to maintain the system.

Smart Traffic Management System has been developed by using multiple features of hardware components in IoT. Traffic optimization is achieved using IoT platform for efficient utilizing allocating varying time to all traffic signal according to available vehicles count in road path. Smart Traffic Management System is implemented to deal efficiently with problem of congestion and perform re-routing at intersections on a road.

This research presents an effective solution for rapid growth of traffic flow particularly in big cities which is increasing day by day and traditional systems have some limitations as they fail to manage current traffic effectively. Keeping in view the state of the art approach for traffic management systems, a smart traffic management system is proposed to control road traffic situations more efficiently and effectively. It changes the signal timing intelligently according to traffic density on the particular roadside and regulates traffic flow by communicating with local server more effectively than ever before. The decentralized approach makes it optimized and effective as the system works even if a local server or centralized server has crashed. The system also provides useful information to higher authorities that can be used in road planning which helps in optimal usage of resources. (Sabeen Javaid, 2018)