




COMMERCIAL BOATS

ASIS HDIB 280

Technical Specifications - Page 1/3

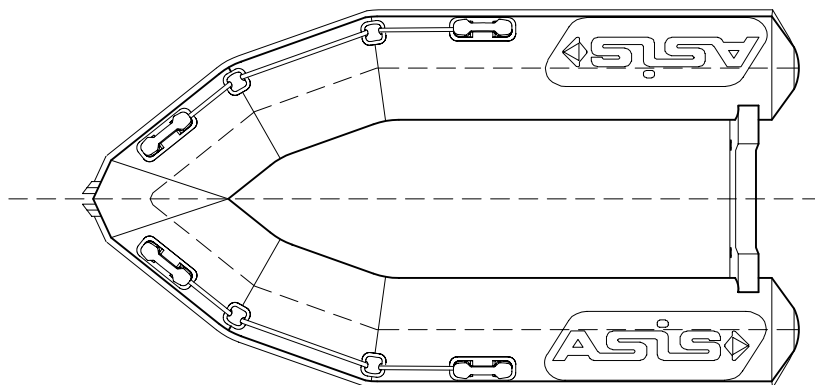

Dimensions

Overall length	2800mm
Overall Beam	1500mm
Internal Length	2130mm
Internal Beam	680mm
Weight Empty	53 Kg
Buoyancy Collar diameter	410mm


Capacity

Max No. of Persons*	4 Persons
Max Payload incl. Fuel*	375 Kg
Floor Board Usable Area	1.2 m2
Buoyancy Volume	721 L

* ISO 6185

Safety / Inflation

Number of Air Chambers	3 No.
Inflatable Keel	1 No.
Inflation Pressure	0.24 bar / 3.4 PSI
Intercommunication / Inflation Valves	4 No.
Pressure Release Valves	4 No.
Design Category (EC 94/25)	C

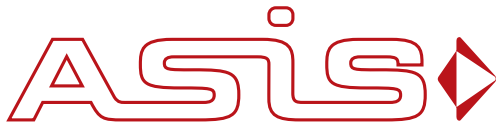

COMMERCIAL BOATS ASIS HDIB 280

Technical Specifications - Page 2/3

Engine Power	
Shaft Length (Single)	Short Shaft (15")
Recommended Power	20 Hp
Maximum Power	25 Hp
Maximum Engine Weight	50 Kg


Buoyancy Tube	
Standard Colors	Light Grey Color
Buoyancy Tube	Hypalon Neoprene 1670 Dtex
Keel Tube	Hypalon Neoprene 1670 Dtex
Floor	Hypalon Neoprene 1670 Dtex

Floor Board	
Roll up floorboard	Reinforced Aluminum Floor Board

Reinforcement	
Rubber Fender Strake all around the tube	2 No.
Flat Rubber Strake Underneath Keel	1 No.

Handling	
Exterior Life Line (Grab Rope)	1 Set
Bow Carrying Handle, Webbing on Hypalon	1 No.
Interior Handle, Webbing on Hypalon	3 Sets
S.S D-ring Patches	3 Sets

Transom	
Aluminum Heavy Duty Transom	1 No.
Deck Drains	1 No.

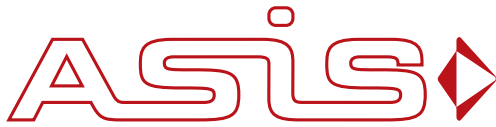

COMMERCIAL BOATS
ASIS HDIB 280

Technical Specifications - Page 3/3

Towing	
Bow Large Towing D-ring (S.S Heavy Duty D Ring)	1 No.
Aft Large Towing D-rings	2 No.
Transome Lifting Poiints (U-Bolts)	2 No.

Accessories	
Foot Pump	1 No.
Boat Carrying Bag	1 No.
Repair Kit	1 No.
Aluminum Oars	2 No.