




COMMERCIAL BOATS

ASIS HDIB 420

Technical Specifications - Page 1/3

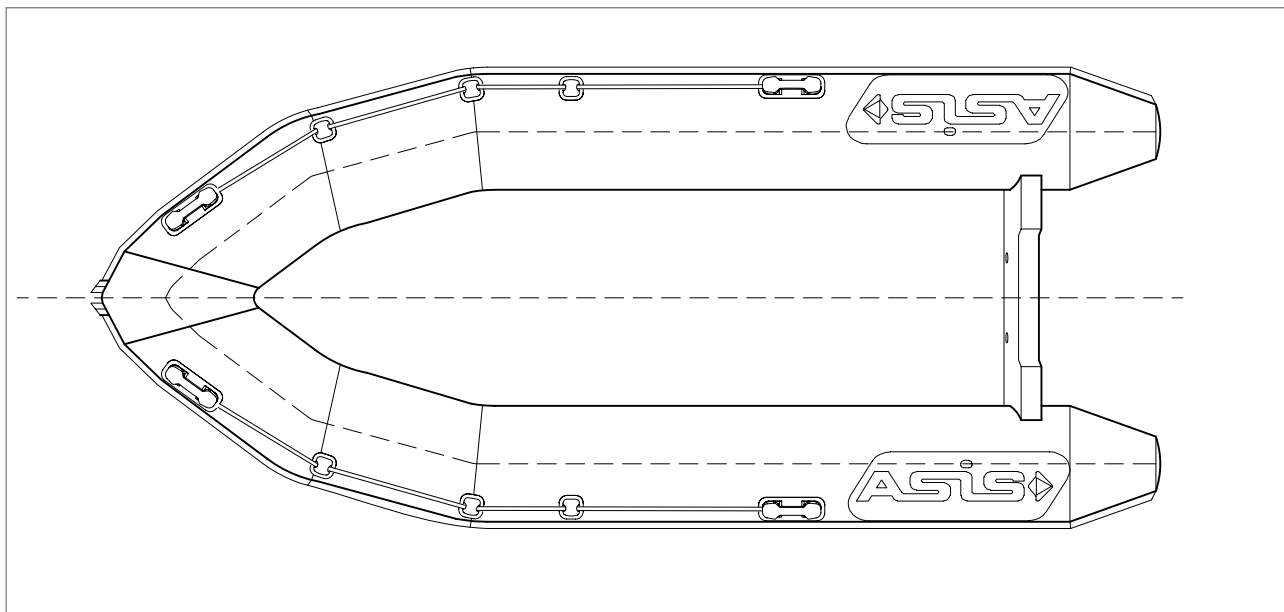


Dimensions	
Overall length	4200mm
Overall Beam	1736mm
Internal Length	3010mm
Internal Beam	815mm
Weight Empty	110 Kg
Buoyancy Collar diameter	450mm

Capacity	
Max No. of Persons*	7 Persons
Max Payload incl. Fuel*	1100 Kg
Floor Board Usable Area	2.3 m2
Buoyancy Volume	1373 L

* ISO 6185

Safety / Inflation	
Number of Air Chambers	4 No.
Inflatable Keel	1 No.
Inflation Pressure	0.24 bar / 3.4 PSI
Intercommunication / Inflation Valves	5 No.
Pressure Release Valves	5 No.
Design Category (EC 94/25)	C

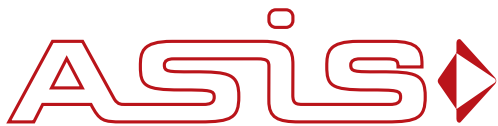

COMMERCIAL BOATS ASIS HDIB 420

Technical Specifications - Page 2/3

Engine Power	
Shaft Length (Single)	Short Shaft (15")
Recommended Power	40 Hp
Maximum Power	55 Hp
Maximum Engine Weight	120 Kg

Buoyancy Tube	
Standard Colors	Light Grey Color
Buoyancy Tube	Hypalon Neoprene 1670 Dtex
Keel Tube	Hypalon Neoprene 1670 Dtex
Floor	Hypalon Neoprene 1670 Dtex

Floor Board	
Roll up floorboard	Reinforced Aluminum Floor Board

Reinforcement	
Rubber Fender Strake all around the tube	2 No.
Flat Rubber Strake Underneath Keel	1 No.

Handling	
Exterior Life Line (Grab Rope)	1 Set
Bow Carrying Handle, Webbing on Hypalon	1 No.
Interior Handle, Webbing on Hypalon	5 Sets
S.S D-ring Patches	5 Sets

Transom	
Aluminum Heavy Duty Transom	1 No.
Deck Drains	1 No.



COMMERCIAL BOATS
ASIS HDIB 420

Technical Specifications - Page 3/3

Towing	
Bow Large Towing D-ring (S.S Heavy Duty D Ring)	1 No.
Aft Large Towing D-rings	2 No.
Transome Lifting Poiints (U-Bolts)	2 No.

Accessories	
Foot Pump	1 No.
Boat Carrying Bag	1 No.
Repair Kit	1 No.
Aluminum Oars	2 No.