




COMMERCIAL BOATS
ASIS HDIB 480

Technical Specifications - Page 1/3

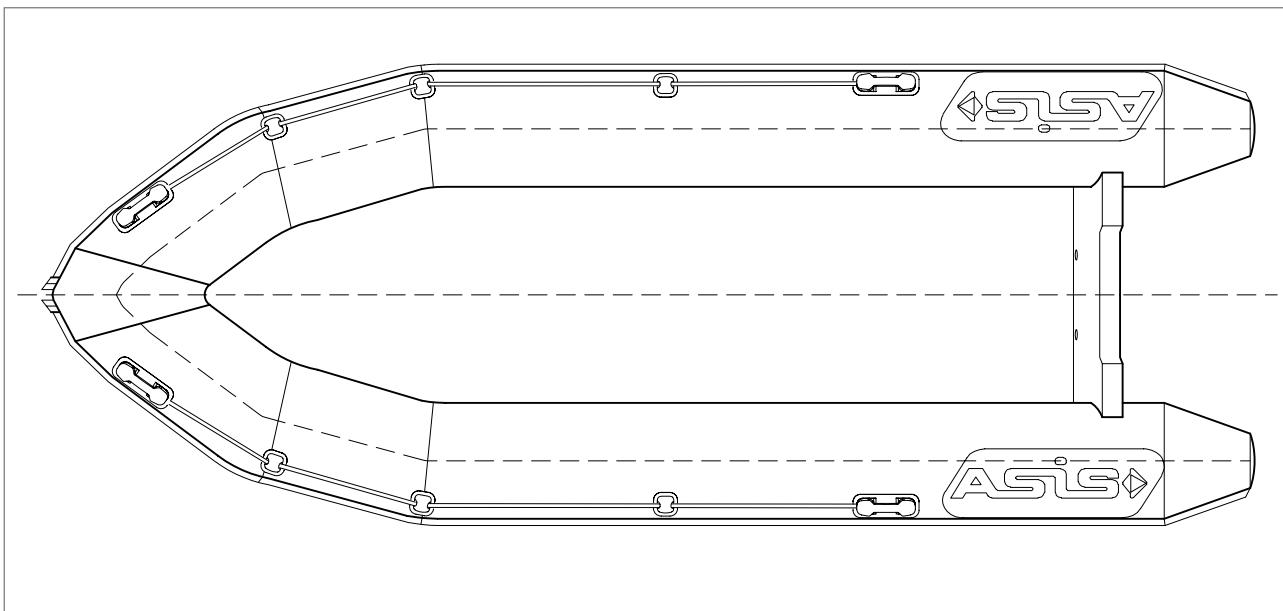

Dimensions

Overall length	4800mm
Overall Beam	1830mm
Internal Length	3430mm
Internal Beam	860mm
Weight Empty	125 Kg
Buoyancy Collar diameter	460mm

Capacity

Max No. of Persons*	10 Persons
Max Payload incl. Fuel*	1150 Kg
Floor Board Usable Area	2.7 m ²
Buoyancy Volume	1563 L

* ISO 6185

Safety / Inflation

Number of Air Chambers	4 No.
Inflatable Keel	1 No.
Inflation Pressure	0.24 bar / 3.4 PSI
Intercommunication / Inflation Valves	5 No.
Pressure Release Valves	5 No.
Design Category (EC 94/25)	C



COMMERCIAL BOATS

ASIS HDIB 480

Technical Specifications - Page 2/3

Engine Power	
Shaft Length (Single)	Short Shaft (15")
Recommended Power	50 Hp
Maximum Power	65 Hp
Maximum Engine Weight	120 Kg


Buoyancy Tube	
Standard Colors	Light Grey Color
Buoyancy Tube	Hypalon Neoprene 1670 Dtex
Keel Tube	Hypalon Neoprene 1670 Dtex
Floor	Hypalon Neoprene 1670 Dtex

Floor Board	
Roll up floorboard	Reinforced Aluminum Floor Board

Reinforcement	
Rubber Fender Strake all around the tube	2 No.
Flat Rubber Strake Underneath Keel	1 No.

Handling	
Exterior Life Line (Grab Rope)	1 Set
Bow Carrying Handle, Webbing on Hypalon	1 No.
Interior Handle, Webbing on Hypalon	5 Sets
S.S D-ring Patches	5 Sets

Transom	
Aluminum Heavy Duty Transom	1 No.
Deck Drains	1 No.

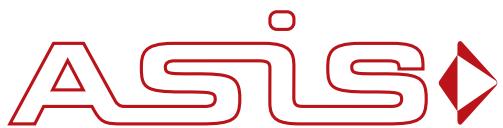

COMMERCIAL BOATS
ASIS HDIB 480

Technical Specifications - Page 3/3

Towing	
Bow Large Towing D-ring (S.S Heavy Duty D Ring)	1 No.
Aft Large Towing D-rings	2 No.
Transome Lifting Points (U-Bolts)	2 No.

Accessories	
Foot Pump	1 No.
Boat Carrying Bag	1 No.
Repair Kit	1 No.
Aluminum Oars	2 No.