



Aluminum D-Tube Boats	13m (Aluminum)
Hull and Deck	Aluminum (Foam-Shield® hull)
Length overall with engine: (m - ft./In.)	13 - 42'8"
Beam overall: (meter - feet/inches)	3.9 - 12'10"
Lightship Weight: (kgs -lbs)	6,765 - 14,914
Payload: (kgs - lbs)	2,315 - 5,104
D-Tube: (Hypalon 1670 Dtex)	Hyb Foam®
Tube Diameter: (meter - feet/inches)	0.56 - 1'10"
Recommended Power: (HP)	3x350
Max. Power allowed (HP)	3x450
Max. Speed: (km/h - mph)	109
Max. Fuel Capacity: (US Gallon)	317 (1200 L)
No of Pax	18
Propulsion	Outboard/Inboard

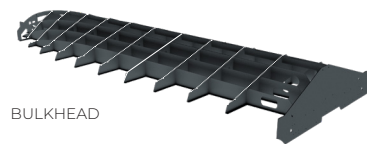

Infused waterproof foam

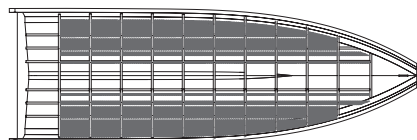

Our exclusive **Foam Shield® Aluminum hull** is manufactured using Marine grade aluminum providing strength, durability and corrosion resistance that maritime applications require. The hull is filled with infused waterproof foam to add rigidity, stability and floatability if a hull breach ever occurred. It also reduces vibration and dampens noise.

ASIS Boats uses CNC cutting machines to achieve outstanding quality and consistency of all Aluminum components.

Reverse Chines :




- Stability at rest
- Dryness of ride
- Lower planning speeds
- Enhanced directional stability

Lifting Strakes :

- Reduce the wetted surface area and drag to give more support to the hull

NOTE:

This material contains proprietary data belonging to ASIS Boats LLC. Unauthorized disclosure, use or reproduction will result in liability. ASIS Boats reverse the right to change the specifications of this technical data sheet without prior notice. For more information, log on to www.asisboats.com
All renderings shown are for illustration purposes only and may not be an exact representation of the product.

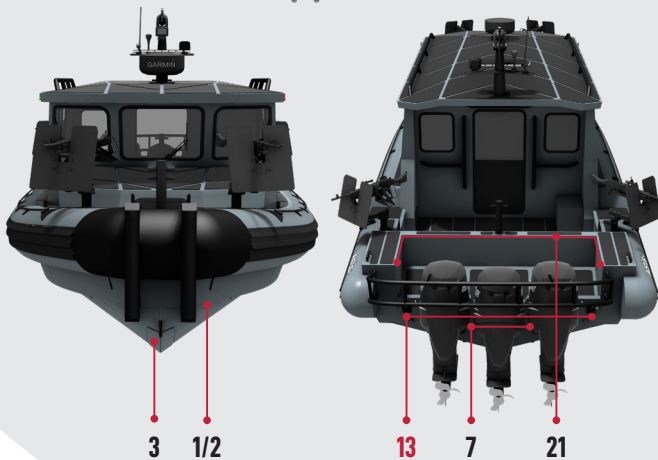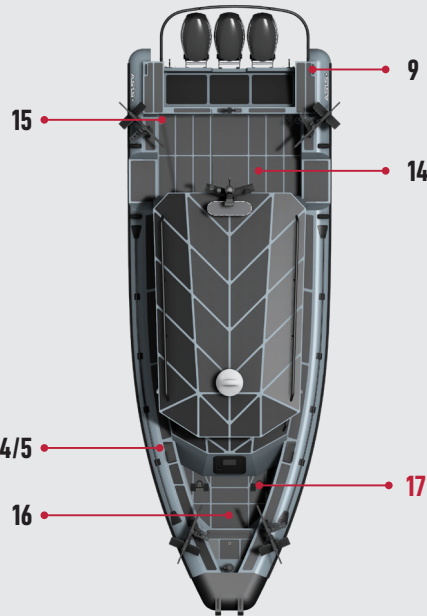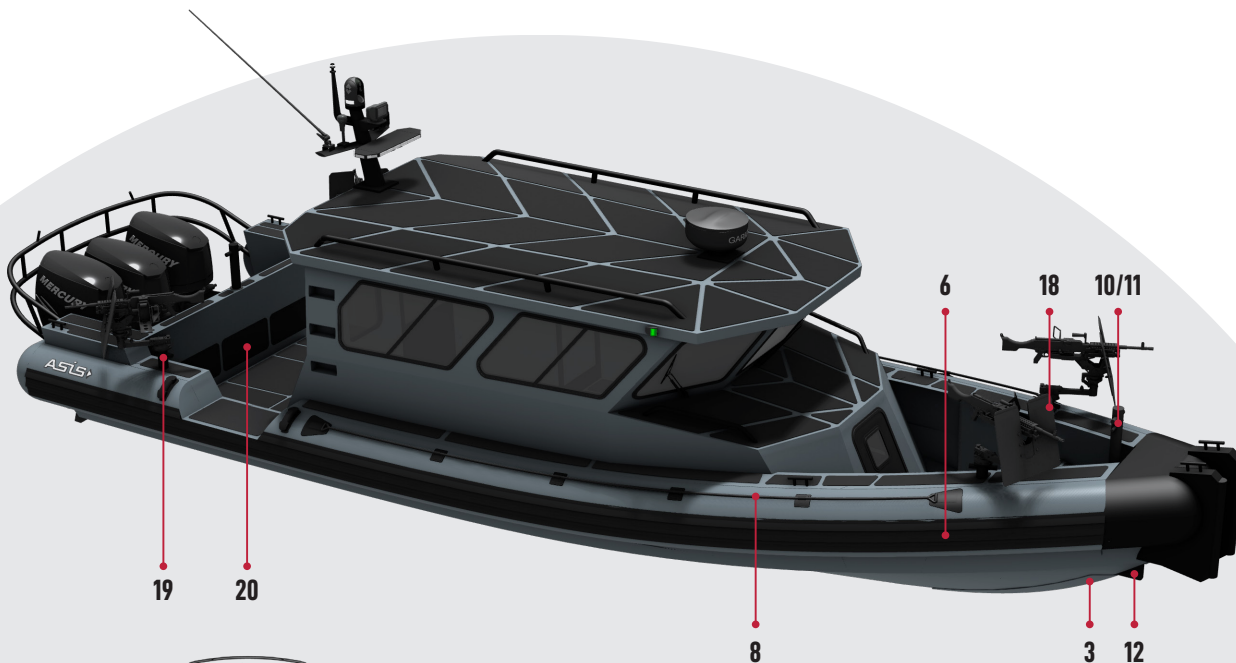

Standard Equipment

1. Marine grade heavy duty aluminum structure hull & deck
2. Foam shield® aluminum hull
3. Reinforced keel beaching plate (Keel guard)
4. Foam filled D-Tube
5. Tube material heavy duty hypalon 1670 dtex filled with PE foam*
6. EPDM rubber all-around rubbing strakes (double or triple)
7. Sacrificial hull anode(s)
8. External safety rope grab line
9. Aluminum cleats 4nos
10. Bow storage/anchor locker with door
11. Aluminum eye nut inside the anchor box
12. Reinforced bow towing eye
13. Heavy duty stainless steel transom tie-downs (fair lead) 2nos.
14. Non-slip painted deck surfacing
15. Self draining deck
16. Under-deck storages (2Nos)
17. S.S. heavy duty lifting points (2nos. on front & 2nos. on back)
18. Bow built-in Tow Posts with gun mounting plates (on gunwale).
19. Aft built-in Tow Posts with gun mounting plates.
20. Maintenance hatches at engine pit
21. Motorwell
 - Paddles 2nos.
 - Switch panel
 - LED navigation and anchor lights
 - Automatic bilge pumps 2nos. with float switch
 - Marine aluminum fuel tank with gauge and sender
 - Air pump
 - Repair kit

NOTE:

This material contains proprietary data belonging to ASIS Boats LLC. Unauthorized disclosure, use or reproduction will result in liability. ASIS Boats reverse the right to change the specifications of this technical data sheet without prior notice. For more information, log on to www.asisboats.com
All renderings shown are for illustration purposes only and may not be an exact representation of the product.