Floating Point

Adapted for CS367 @ GMU

Today: Floating Point

- Background: Fractional binary numbers
- IEEE floating point standard: Definition
- Example and properties
- Rounding, addition, multiplication
- Floating point in C
- Summary

Fractional binary numbers

- What is 1011.101_2?

Fractional Binary Numbers

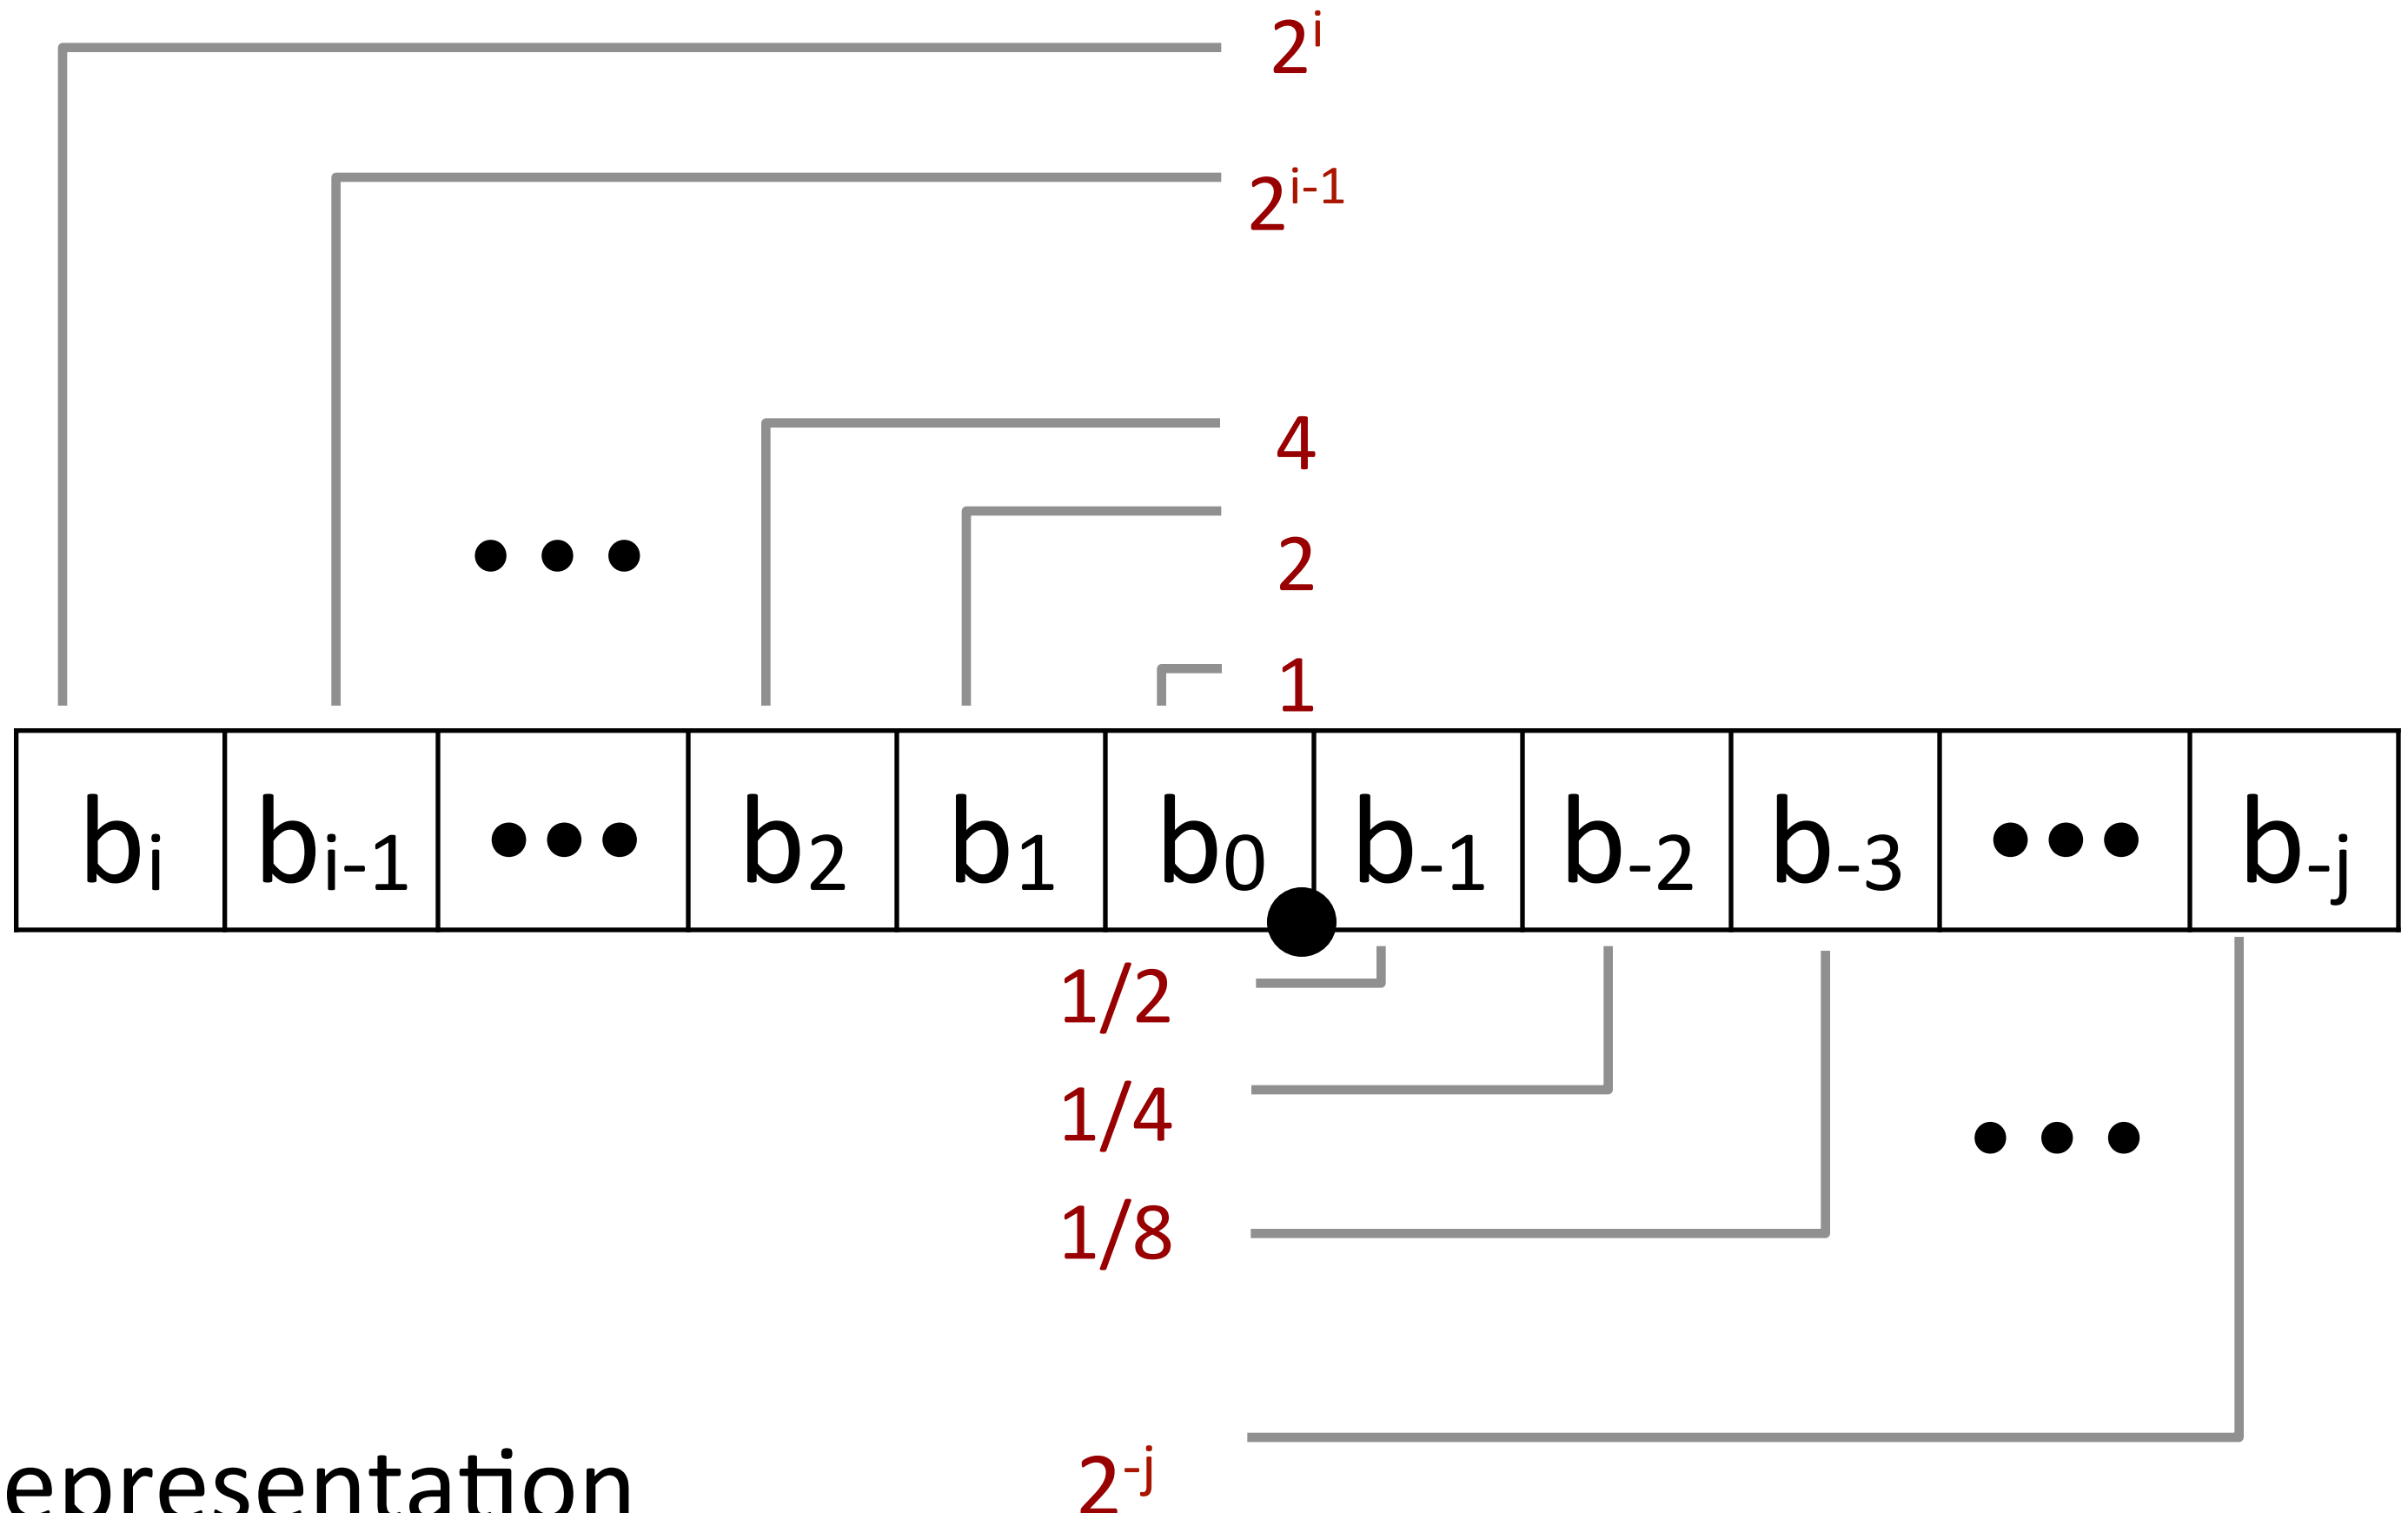

- **Representation**
  - Bits to right of "binary point" represent fractional powers of 2
  - Represents rational number:

$$\sum_{k=-j}^{i} b_k \times 2^k$$

Fractional Binary Numbers: Examples

- Value — Representation

Value	Representation
5 3/4	101.11_2
2 7/8	10.111_2
1 7/16	1.0111_2

- Observations
  - Divide by 2 by shifting right (unsigned)
  - Multiply by 2 by shifting left
  - Numbers of form $0.111111\ldots_2$ are just below 1.0
    - $1/2 + 1/4 + 1/8 + \ldots + 1/2^i + \ldots \rightarrow 1.0$
    - Use notation $1.0 - \varepsilon$

Representable Numbers

- Limitation #1
  - Can only exactly represent numbers of the form $x/2^k$
    - Other rational numbers have repeating bit representations
  - Value Representation
    - 1/3 `0.0101010101[01]`$\ldots_2$
    - 1/5 `0.001100110011[0011]`$\ldots_2$
    - 1/10 `0.0001100110011[0011]`$\ldots_2$
- Limitation #2
  - Just one setting of binary point within the *w* bits
    - Limited range of numbers (very small values? very large?)

Today: Floating Point

- Background: Fractional binary numbers
- IEEE floating point standard: Definition
- Example and properties
- Rounding, addition, multiplication
- Floating point in C
- Summary

IEEE Floating Point

- IEEE Standard 754
  - Established in 1985 as uniform standard for floating point arithmetic
    - Before that, many idiosyncratic formats
  - Supported by all major CPUs

- Driven by numerical concerns
  - Nice standards for rounding, overflow, underflow
  - Hard to make fast in hardware
    - Numerical analysts predominated over hardware designers in defining standard

Floating Point Representation

- Numerical Form:

$$(-1)^s \, M \;\; 2^E$$

  - Sign bit s determines whether number is negative or positive
  - Significand M normally a fractional value in range [1.0,2.0).
  - Exponent E weights value by power of two

- Encoding
  - MSB s is sign bit s
  - exp field encodes E (but is not equal to E)
  - frac field encodes M (but is not equal to M)

Precision options

- Single precision: 32 bits

1 8-bits 23-bits

- Double precision: 64 bits

1 11-bits 52-bits

- Extended precision: 80 bits (Intel only)

1 15-bits 63 or 64-bits

"Normalized" Values

$v = (-1)^s M 2^E$

- When: exp ≠ 000…0 and exp ≠ 111…1

- Exponent coded as a biased value: E = Exp – Bias
  - Exp: unsigned value of exp field
  - Bias = 2^{k-1} - 1, where k is number of exponent bits
    - Single precision: 127 (Exp: 1…254, E: -126…127)
    - Double precision: 1023 (Exp: 1…2046, E: -1022…1023)

- Significand coded with implied leading 1: $M = 1.xxx…x_2$
  - xxx…x: bits of frac field
  - Minimum when frac=000…0 (M = 1.0)
  - Maximum when frac=111…1 (M = 2.0 – ε)
  - Get extra leading bit for "free"

Normalized Encoding Example

$$v = (-1)^s \, M \, 2^E$$
$$E = \text{Exp} - \text{Bias}$$

- **Value:** `float F = 15213.0;`
  - $15213_{10} = 11101101101101_2$
    $= 1.1101101101101_2 \times 2^{13}$

- **Significand**

  M = $\texttt{1.}\underline{\texttt{1101101101101}}_2$

  `frac`= $\underline{\texttt{1101101101101}}\texttt{0000000000}_2$

- **Exponent**

  E = 13

  $Bias$ = 127

  Exp = 140 = $\texttt{10001100}_2$

- **Result:**

`0`	`10001100`	`11011011011010000000000`
`s`	`exp`	`frac`

Practice Problem

The bias of the exponent is always $2^{(e-1)}$-1, for e bits of exp. What is the bias for each width of floating points?

- **8 bit fp (one of many "minifloat" formats), with 4 exp bits**
- **16 bit fp ("binary16"), with 5 exp bits**
- **32 bit fp ("single precision"), with 8 exp bits**
- **64 bit fp ("double precision"), with 11 exp bits**
- **128 bit fp ("quadruple precision"), with 15 exp bits**

- **Why do you think the exponent is usually a small portion of the total available bits?**
  - What would happen if we had mostly exp and very little frac?

Practice Problem

Identify the values represented by these 8-bit floating point values. All are normalized. 1 sign bit, 4 exp bits, 3 frac bits. Bias = $2^{(4-1)}$-1 = 8-1=7.

- **0 1001 010**
- **1 0111 100**
- **0 1110 000**

14

Denormalized Values

$v = (-1)^s M\ 2^E$
$E = 1 - \text{Bias}$

- Condition: exp = 000…0

- Exponent value: E = 1 – Bias (instead of E = 0 – Bias)
- Significand coded with implied leading 0: $M = 0.xxx…x_2$
  - `xxx…x`: bits of `frac`
- Cases
  - `exp` = **000…0**, `frac` = **000…0**
    - Represents zero value
    - Note distinct values: +0 and –0 (why?)
  - `exp` = **000…0**, `frac` ≠ **000…0**
    - Numbers closest to 0.0
    - Equispaced

Practice Problem

Identify the values represented by these 8-bit floating point values. All are denormalized. 1 sign bit, 4 exp bits, 3 frac bits. Bias = $2^{(4-1)}-1 = 8-1=7$.

- 0 0000 010
- 1 0000 100
- 0 0000 000

Special Values

- Condition: `exp` = **111…1**

- Case: `exp` = **111…1**, `frac` = **000…0**
  - Represents value ∞ (infinity)
  - Operation that overflows
  - Both positive and negative
  - E.g., 1.0/0.0 = −1.0/−0.0 = +∞, 1.0/−0.0 = −∞

- Case: `exp` = **111…1**, `frac` ≠ **000…0**
  - Not-a-Number (NaN)
  - Represents case when no numeric value can be determined
  - E.g., sqrt(–1), ∞ − ∞, ∞ × 0

Practice Problem

- Classify each of these 12-bit floating point numbers as normalized, denormalized, or special (and indicate what special value).
  - `0 00101 110111`
  - `1 00000 111111`
  - `0 11111 000000`
  - `0 00000 100110`
  - `1 11111 111111`
  - `0 00000 000000`
  - `1 00001 101010`

Visualization: Floating Point Encodings

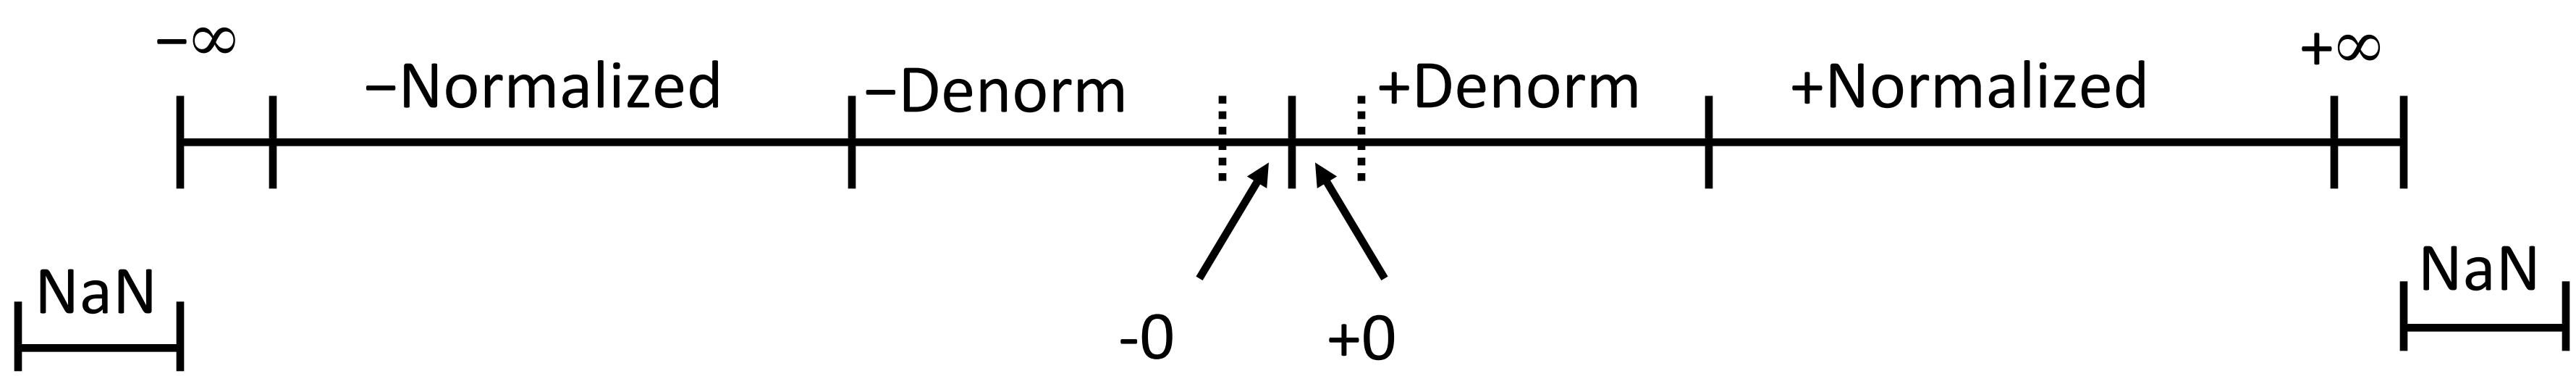

Today: Floating Point

- Background: Fractional binary numbers
- IEEE floating point standard: Definition
- Example and properties
- Rounding, addition, multiplication
- Floating point in C
- Summary

Tiny Floating Point Example

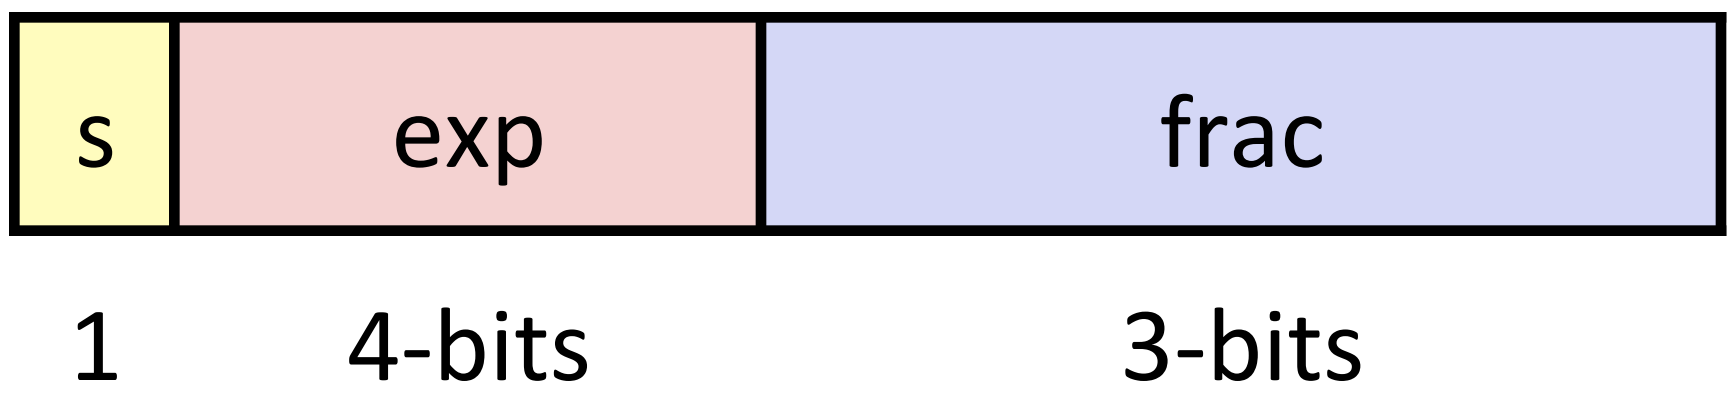

- 8-bit Floating Point Representation
  - the sign bit is in the most significant bit
  - the next four bits are the exponent, with a bias of 7
  - the last three bits are the `frac`

- Same general form as IEEE Format
  - normalized, denormalized
  - representation of 0, NaN, infinity

Dynamic Range (Positive Only)

$v = (-1)^s \, M \, 2^E$

n: E = Exp – Bias

d: E = 1 – Bias

	s	exp	frac	E	Value	
Denormalized numbers	0	0000	000	-6	0	
	0	0000	001	-6	1/8*1/64 = 1/512	closest to zero
	0	0000	010	-6	2/8*1/64 = 2/512	
	…					
	0	0000	110	-6	6/8*1/64 = 6/512	
	0	0000	111	-6	7/8*1/64 = 7/512	largest denorm
Normalized numbers	0	0001	000	-6	8/8*1/64 = 8/512	smallest norm
	0	0001	001	-6	9/8*1/64 = 9/512	
	…					
	0	0110	110	-1	14/8*1/2 = 14/16	
	0	0110	111	-1	15/8*1/2 = 15/16	closest to 1 below
	0	0111	000	0	8/8*1 = 1	
	0	0111	001	0	9/8*1 = 9/8	closest to 1 above
	0	0111	010	0	10/8*1 = 10/8	
	…					
	0	1110	110	7	14/8*128 = 224	
	0	1110	111	7	15/8*128 = 240	largest norm
	0	1111	000	n/a	inf	

Examples: binary to float

7	6 … 3	2 … 0
s	exp	frac

1. 0 0101 110

   exp = 5, so E = 5 – 7 = -2

   frac = 6/8, so M = 14/8 $\quad$ = 14/8 * 2^{-2} = 7/16

2. 1 1010 011

   exp = 10, so E = 10 – 7 = 3

   frac = 3/8, so M = 11/8 $\quad$ = -11/8 * 2^{3} = -11.0

3. 0 0000 010

   exp = 0, so denormalized.

   E = -6, (-bias + 1)

   frac = 2/8, so M = 2/8 $\quad$ = 2/8 * 1/64 = 1/256

Examples: float to binary

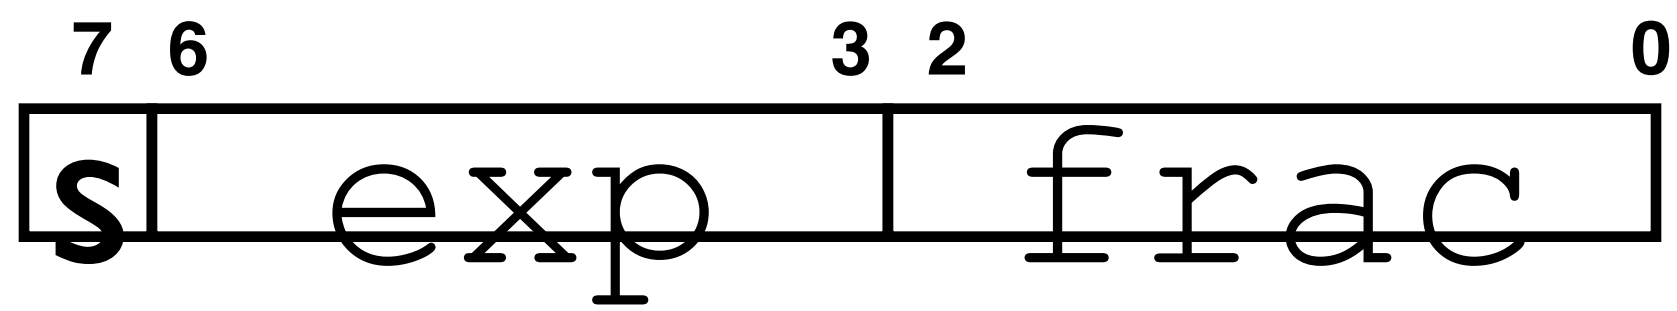

1. $52.0 = 1.625 * 2^5$

- E = 5 so exp must be 12
- 1.625 = 13/8 so frac = 5/8 = 0 1100 101

- Could also do this way: 52 is 110100 in 6-bits.
- Dividing by 2 5 times gives us 1.<u>101</u>00

Fraction bits

2. $7/64 = 14/8 * 1/2^4$

- E = -4 so exp must be 3
- frac = 6/8 = 0 0011 110

Practice Problem

- What is the largest denormalized value for 8-bit numbers? (bit pattern, value)

- What is the smallest normalized value for 8-bit numbers? (bit pattern, value)

25

Practice Problem

Write each of these numbers in base two scientific notation. Then, represent them as 8-bit floating point values.

a. 3
b. 32
c. - 40
d. 100
e. 3/512
f. - 5/64
g. 1

Distribution of Values

- 6-bit IEEE-like format
  - e = 3 exponent bits
  - f = 2 fraction bits
  - Bias is $2^{3-1}-1 = 3$

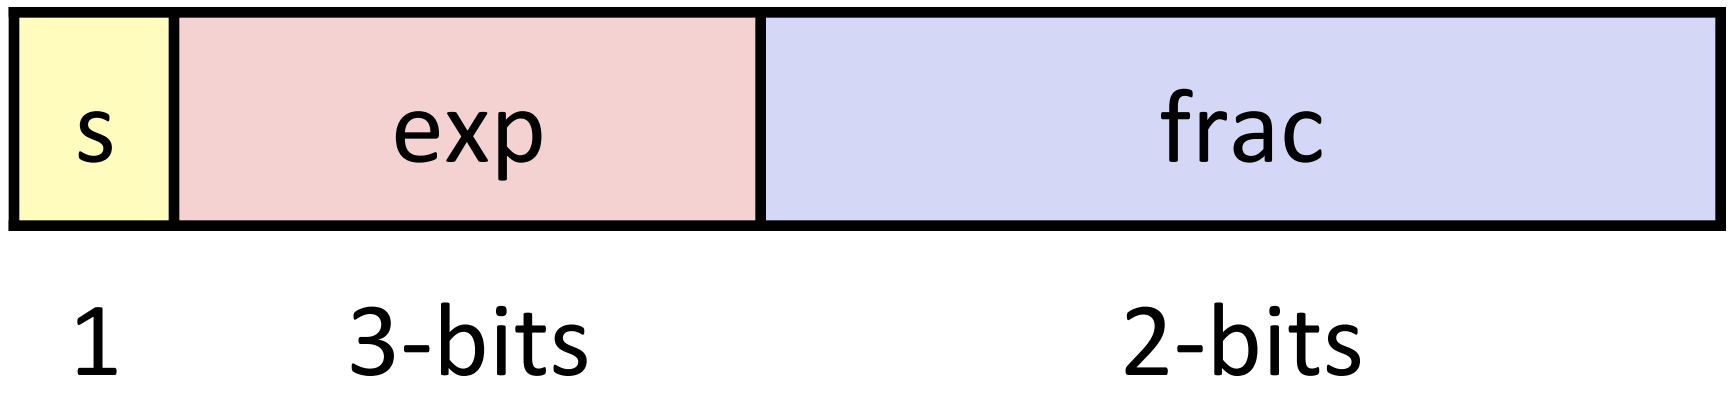

- Notice how the distribution gets denser toward zero.

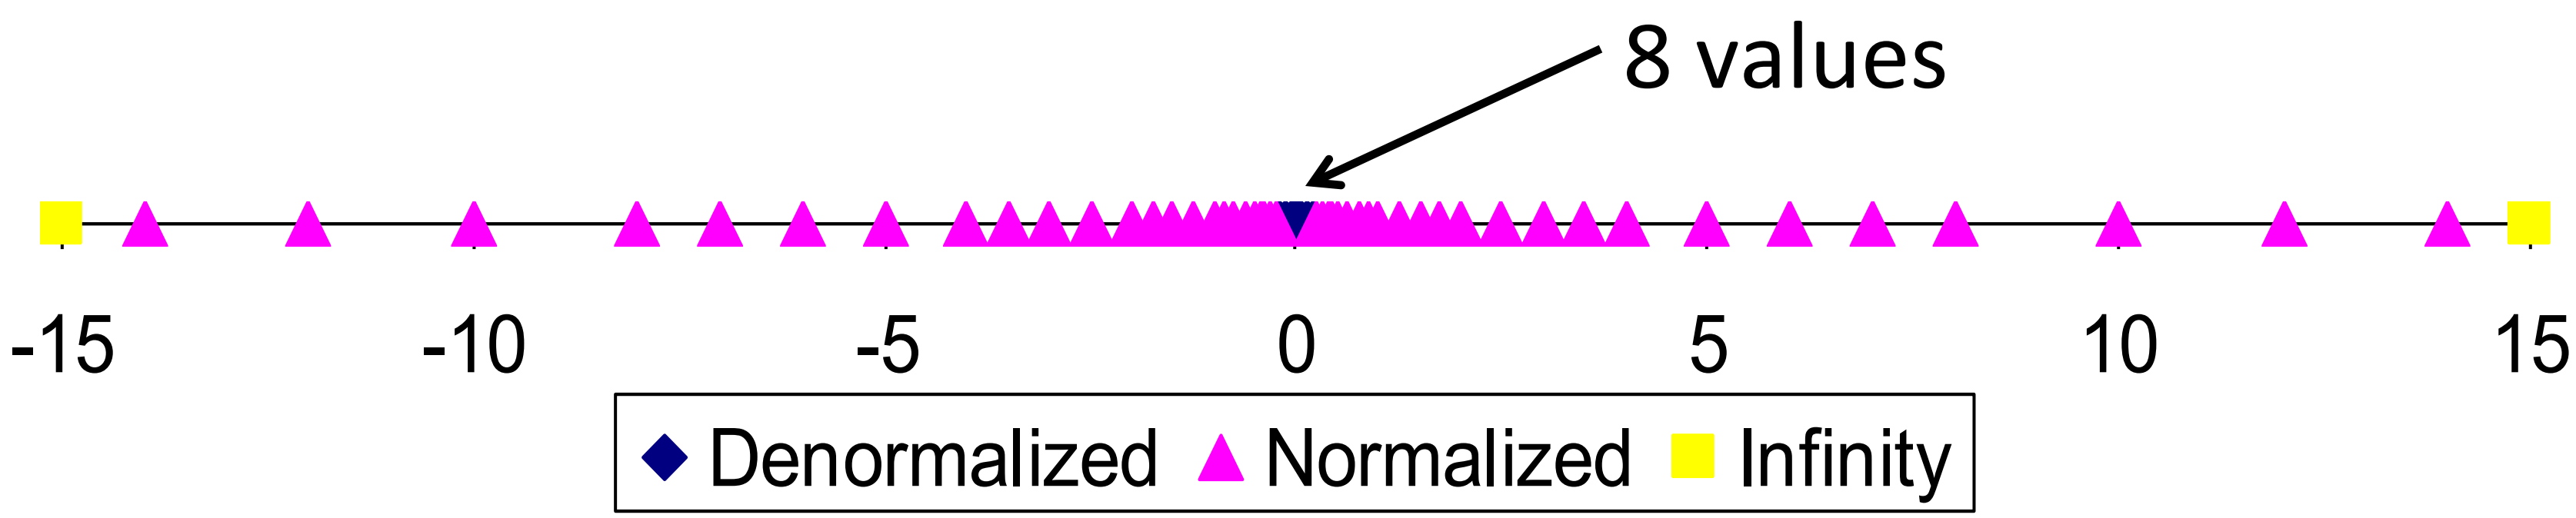

Distribution of Values (close-up view)

- 6-bit IEEE-like format
  - e = 3 exponent bits
  - f = 2 fraction bits
  - Bias is 3

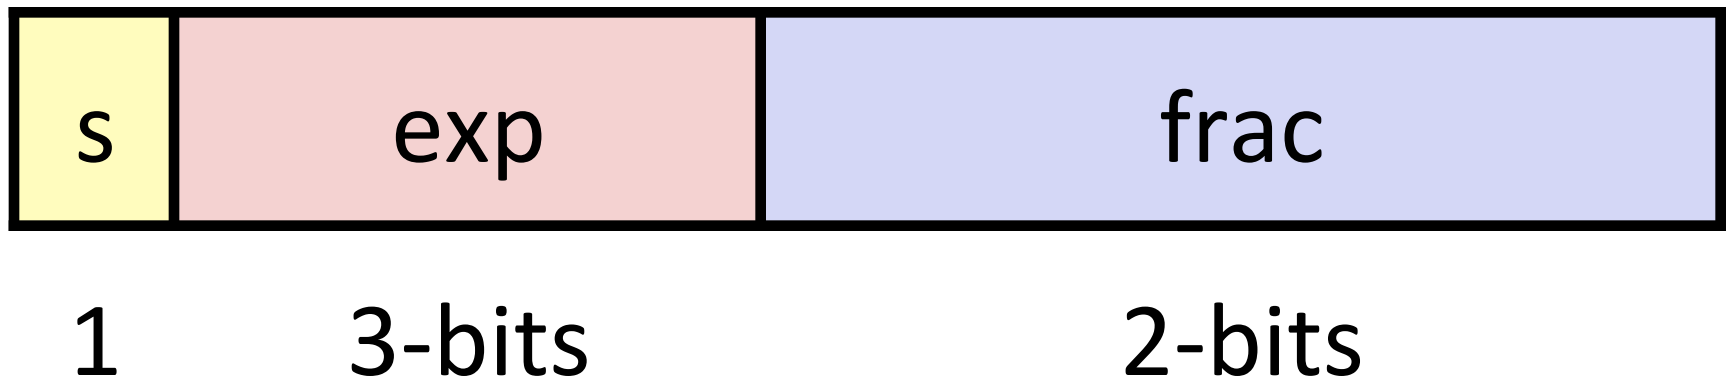

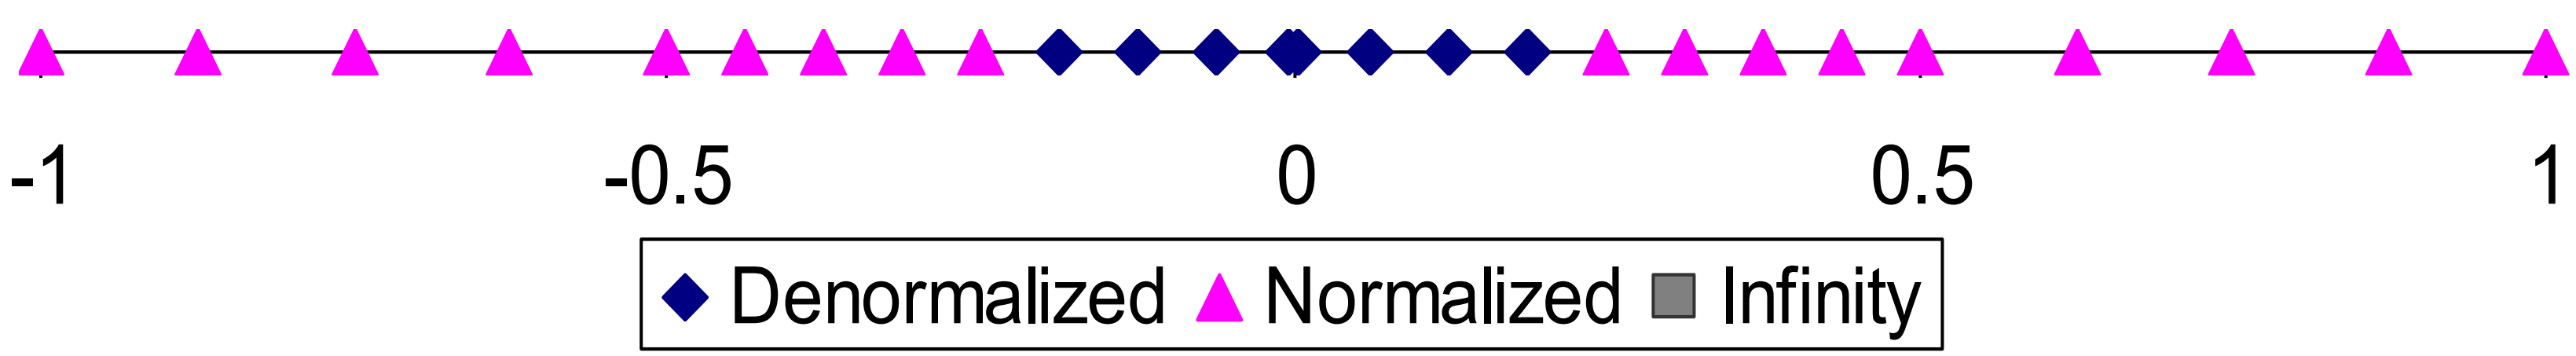

Special Properties of the IEEE Encoding

- FP Zero Same as Integer Zero
  - All bits = 0
- Can (Almost) Use Unsigned Integer Comparison
  - Must first compare sign bits
  - Must consider −0 = 0
  - NaNs problematic
    - Will be greater than any other values
    - What should comparison yield?
  - Otherwise OK
    - Denorm vs. normalized
    - Normalized vs. infinity

Today: Floating Point

- Background: Fractional binary numbers
- IEEE floating point standard: Definition
- Example and properties
- Rounding, addition, multiplication
- Floating point in C
- Summary

Floating Point Operations: Basic Idea

- $x +_f y = \text{Round}(x + y)$

- $x \times_f y = \text{Round}(x \times y)$

- Basic idea
  - First compute exact result
  - Make it fit into desired precision
    - Possibly overflow if exponent too large
    - Possibly round to fit into `frac`

Rounding

- Rounding Modes (illustrate with $ rounding)

	$1.40	$1.60	$1.50	$2.50	–$1.50
Towards zero	$1	$1	$1	$2	–$1
Round down (−∞)	$1	$1	$1	$2	–$2
Round up (+∞)	$2	$2	$2	$3	–$1
Nearest Even (default)	$1	$2	$2	$2	–$2

Closer Look at Round-To-Even

- Default Rounding Mode
  - Hard to get any other kind without dropping into assembly
  - All others are statistically biased
    - Sum of set of positive numbers will consistently be over- or under-estimated

- Applying to Other Decimal Places / Bit Positions
  - When exactly halfway between two possible values
    - Round so that least significant digit is even
  - E.g., round to nearest hundredth

7.8949999	7.89	(Less than half way)
7.8950001	7.90	(Greater than half way)
7.8950000	7.90	(Half way—round up)
7.8850000	7.88	(Half way—round down)

Rounding Binary Numbers

- Binary Fractional Numbers
  - "Even" when least significant bit is `0`
  - "Half way" when bits to right of rounding position = $\texttt{100}\ldots_2$

- Examples
  - Round to nearest 1/4 (2 bits right of binary point)

Value	Binary	Rounded	Action	Rounded Value
2 3/32	10.00011_2	10.00_2	(<1/2—down)	2
2 3/16	10.00110_2	10.01_2	(>1/2—up)	2 1/4
2 7/8	10.11100_2	11.00_2	(1/2—up)	3
2 5/8	10.10100_2	10.10_2	(1/2—down)	2 1/2

FP Multiplication

- $(-1)^{s1}\ M1\ \ 2^{E1}\quad x\quad (-1)^{s2}\ M2\ \ 2^{E2}$
- Exact Result: $(-1)^{s}\ M\ \ 2^{E}$
  - Sign s: s1 ^ s2
  - Significand M: M1 x M2
  - Exponent E: E1 + E2
- Fixing
  - If M ≥ 2, shift M right, increment E
  - If E out of range, overflow
  - Round M to fit `frac` precision
- Implementation
  - Biggest chore is multiplying significands

Floating Point Addition

- $(-1)^{s1}\ M1\ \ 2^{E1}\ \ +\ \ (-1)^{s2}\ M2\ \ 2^{E2}$
  - Assume E1 > E2
- Exact Result: $(-1)^{s}\ M\ \ 2^{E}$
  - Sign s, significand M:
    - Result of signed align & add
  - Exponent E: E1
- Fixing
  - If M ≥ 2, shift M right, increment E
  - if M < 1, shift M left k positions, decrement E by k
  - Overflow if E out of range
  - Round M to fit `frac` precision

Get binary points lined up

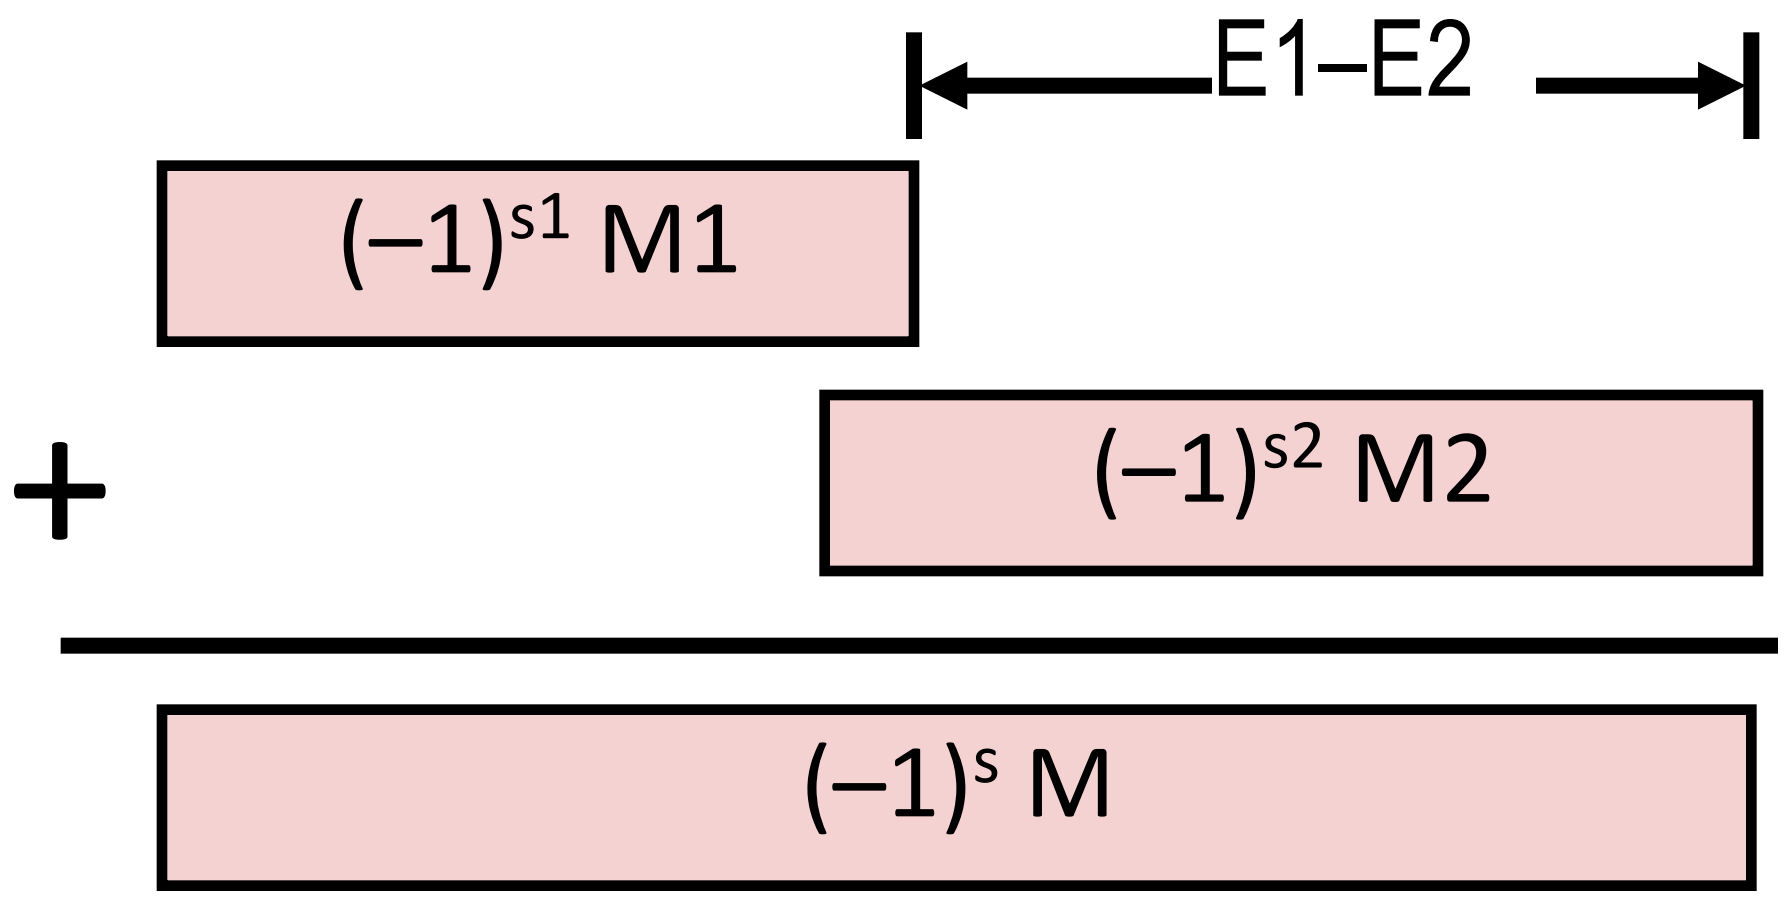

Mathematical Properties of FP Add

- Compare to those of Abelian Group
  - Closed under addition? Yes
    - But may generate infinity or NaN
  - Commutative? Yes
  - Associative? No
    - Overflow and inexactness of rounding
    - `(3.14+1e10)-1e10 = 0, 3.14+(1e10-1e10) = 3.14`
  - 0 is additive identity?
  - Every element has additive inverse? Yes
    - Yes, except for infinities & NaNs Almost
- Monotonicity
  - $a \geq b \Rightarrow a+c \geq b+c$? Almost
    - Except for infinities & NaNs

Mathematical Properties of FP Mult

- Compare to Commutative Ring
  - Closed under multiplication? Yes
    - But may generate infinity or NaN
  - Multiplication Commutative? Yes
  - Multiplication is Associative? No
    - Possibility of overflow, inexactness of rounding
    - Ex: `(1e20*1e20)*1e-20= inf, 1e20*(1e20*1e-20)= 1e20`
  - 1 is multiplicative identity? Yes
  - Multiplication distributes over addition? No
    - Possibility of overflow, inexactness of rounding
    - `1e20*(1e20-1e20)= 0.0, 1e20*1e20 – 1e20*1e20 = NaN`
- Monotonicity
  - $a \geq b$ & $c \geq 0$ $\Rightarrow a * c \geq b * c$? Almost
    - Except for infinities & NaNs

Today: Floating Point

- Background: Fractional binary numbers
- IEEE floating point standard: Definition
- Example and properties
- Rounding, addition, multiplication
- Floating point in C
- Summary

Floating Point in C

- C Guarantees Two Levels
  - `float` single precision
  - `double` double precision
- Conversions/Casting
  - Casting between `int`, `float`, and `double` changes bit representation
  - `double`/`float` → `int`
    - Truncates fractional part
    - Like rounding toward zero
    - Not defined when out of range or NaN: Generally sets to TMin
  - `int` → `double`
    - Exact conversion, as long as `int` has ≤ 53 bit word size
  - `int` → `float`
    - Will round according to rounding mode

Floating Point Puzzles

- For each of the following C expressions, either:
  - Argue that it is true for all argument values
  - Explain why not true

```
int x = …;
float f = …;
double d = …;
```

Assume neither `d` nor `f` is NaN

```
a) x == (int)(float) x
b) x == (int)(double) x
c) f == (float)(double) f
d) d == (double)(float) d
e) f == -(-f);
f) 2/3 == 2/3.0
g) d < 0.0      ⇒  ((d*2) < 0.0)
h) d > f        ⇒  -f > -d
i) d * d >= 0.0
j) (d+f)-d == f
```

Summary

- IEEE Floating Point has clear mathematical properties
- Represents numbers of form M x 2^E
- One can reason about operations independent of implementation
  - As if computed with perfect precision and then rounded
- Not the same as real arithmetic
  - Violates associativity/distributivity
  - Makes life difficult for compilers & serious numerical applications programmers

Creating Floating Point Number

s	exp	frac
1	4-bits	3-bits

- Steps
  - Normalize to have leading 1
  - Round to fit within fraction
  - Postnormalize to deal with effects of rounding

- Case Study
  - Convert 8-bit unsigned numbers to tiny floating point format

Example Numbers

`128`	`10000000`
`13`	`00001101`
`33`	`00010001`
`35`	`00010011`
`138`	`10001010`
`63`	`00111111`

Normalize

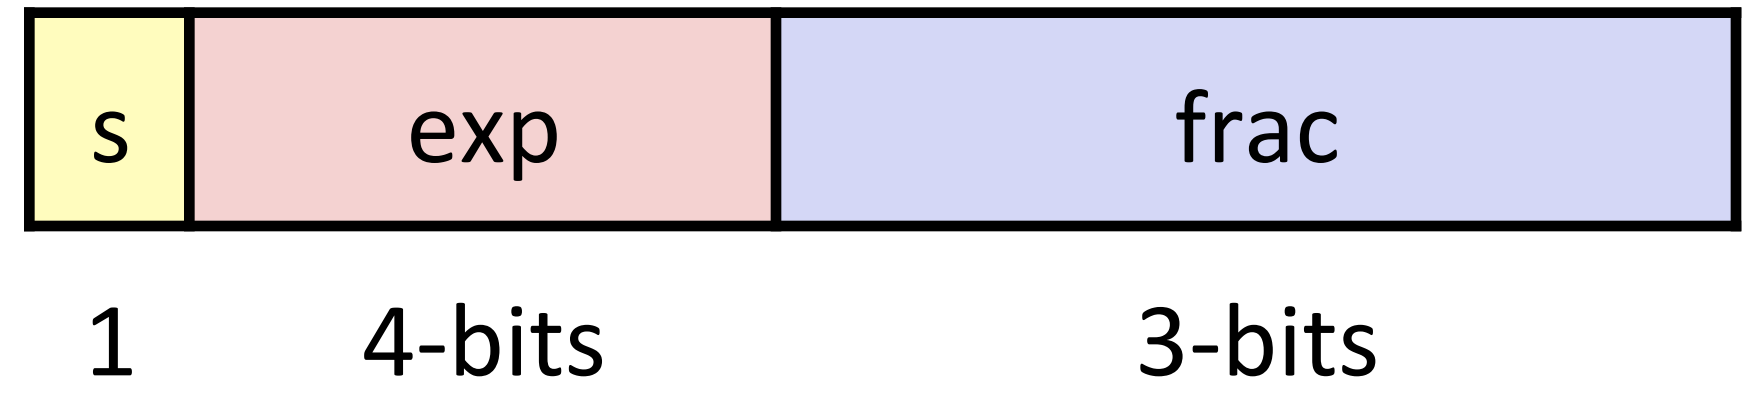

- Requirement
  - Set binary point so that numbers of form 1.xxxxx
  - Adjust all to have leading one
    - Decrement exponent as shift left

Value	Binary	Fraction	Exponent
`128`	`10000000`	`1.0000000`	`7`
`13`	`00001101`	`1.1010000`	`3`
`17`	`00010001`	`1.0001000`	`4`
`19`	`00010011`	`1.0011000`	`4`
`138`	`10001010`	`1.0001010`	`7`
`63`	`00111111`	`1.1111100`	`5`

Rounding

1.BBGRXXX

Guard bit: LSB of result

Round bit: 1^{st} bit removed

Sticky bit: OR of remaining bits

- Round up conditions
  - Round = 1, Sticky = 1 ➙ > 0.5
  - Guard = 1, Round = 1, Sticky = 0 ➙ Round to even

Value	Fraction	GRS	Incr?	Rounded
128	1.0000000	000	N	1.000
13	1.1010000	100	N	1.101
17	1.0001000	010	N	1.000
19	1.0011000	110	Y	1.010
138	1.0001010	011	Y	1.001
63	1.1111100	111	Y	10.000

Postnormalize

- Issue
  - Rounding may have caused overflow
  - Handle by shifting right once & incrementing exponent

Value	Rounded	Exp	Adjusted	Result
`128`	`1.000`	`7`		`128`
`13`	`1.101`	`3`		`13`
`17`	`1.000`	`4`		`16`
`19`	`1.010`	`4`		`20`
`138`	`1.001`	`7`		`144`
`63`	`10.000`	`5`	`1.000/6`	`64`

Interesting Numbers {single,double}

Description	*exp*	*frac*	*Numeric Value*
■ Zero	00…00	00…00	0.0
■ Smallest Pos. Denorm.	00…00	00…01	$2^{-\{23,52\}} \times 2^{-\{126,1022\}}$
▪ Single ≈ 1.4×10^{-45}			
▪ Double ≈ 4.9×10^{-324}			
■ Largest Denormalized	00…00	11…11	$(1.0 - \varepsilon) \times 2^{-\{126,1022\}}$
▪ Single ≈ 1.18×10^{-38}			
▪ Double ≈ 2.2×10^{-308}			
■ Smallest Pos. Normalized	00…01	00…00	$1.0 \times 2^{-\{126,1022\}}$
▪ Just larger than largest denormalized			
■ One	01…11	00…00	1.0
■ Largest Normalized	11…10	11…11	$(2.0 - \varepsilon) \times 2^{\{127,1023\}}$
▪ Single ≈ 3.4×10^{38}			
▪ Double ≈ 1.8×10^{308}			

Ariane 5

- Exploded 37 seconds after liftoff
- Cargo worth $500 million

Why did this happen?

- Computed horizontal velocity as floating point number
- Converted to 16-bit integer
- Worked OK for Ariane 4
- Overflowed for the more powerful Ariane 5
  - Used same software without re-checking assumptions