Arithmentic for Computers

Huzefa Rangwala, PhD

CS 465: Computer Architecture

Fall 2012

Outline for this Module.

- Operations on integers
  - Addition and subtraction
  - Multiplication and division
  - Dealing with overflow
- Floating-point real numbers
  - Representation and operations

Example: Integer Addition

- Example: 7 + 6

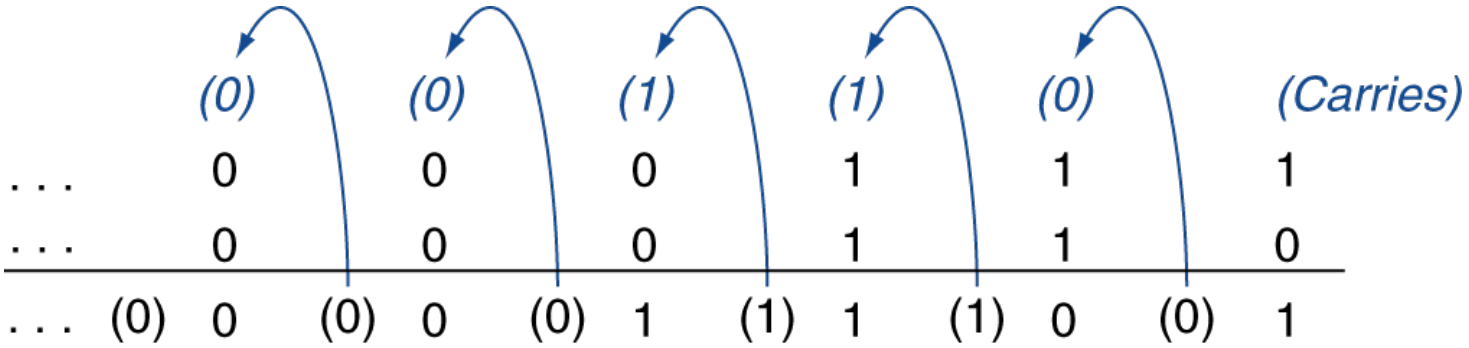

When does Overflow occur ?

- Think ?
- Overflow if result out of range
  - Adding +ve and –ve operands, no overflow
  - Adding two +ve operands
    - Overflow if result sign is 1
  - Adding two –ve operands
    - Overflow if result sign is 0

Integer Subtraction

- Add negation of second operand
- Example: 7 – 6 = 7 + (–6)

+7:	0000 0000 … 0000 0111
–6:	1111 1111 … 1111 1010
+1:	0000 0000 … 0000 0001

- Overflow if result out of range
  - Subtracting two +ve or two –ve operands, no overflow
  - Subtracting +ve from –ve operand
    - Overflow if result sign is 0
  - Subtracting –ve from +ve operand
    - Overflow if result sign is 1

Dealing with Overflow

- Some languages (e.g., C) ignore overflow
  - Use MIPS `addu`, `addui`, `subu` instructions
- Other languages (e.g., Ada, Fortran) require raising an exception
  - Use MIPS `add`, `addi`, `sub` instructions
  - On overflow, invoke exception handler
    - Save PC in exception program counter (EPC) register
    - Jump to predefined handler address
    - `mfc0` (move from coprocessor reg) instruction can retrieve EPC value, to return after corrective action

Arithmetic for Multimedia

- Graphics and media processing operates on vectors of 8-bit and 16-bit data
  - Use 64-bit adder, with partitioned carry chain
    - Operate on 8×8-bit, 4×16-bit, or 2×32-bit vectors
  - SIMD (single-instruction, multiple-data)
- Saturating operations
  - On overflow, result is largest representable value
    - c.f. 2s-complement modulo arithmetic
  - E.g., clipping in audio, saturation in video

How to multiply two numbers in binary ?

- 1000 x 1001 ?
- Do the steps …

Multiplication

- Start with long-multiplication approach

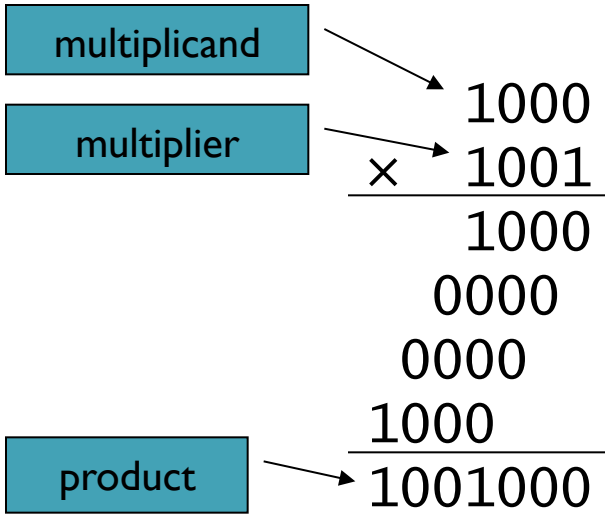

Length of product is the sum of operand lengths

Flow Chart for Multiply

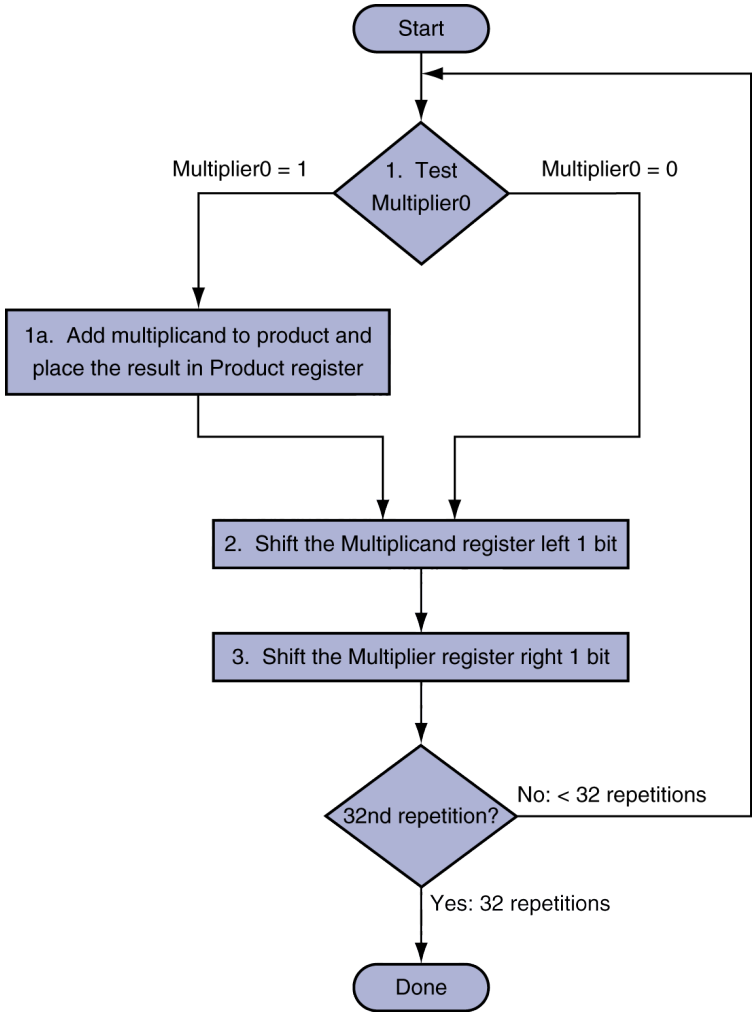

Multiplication

- Hardware

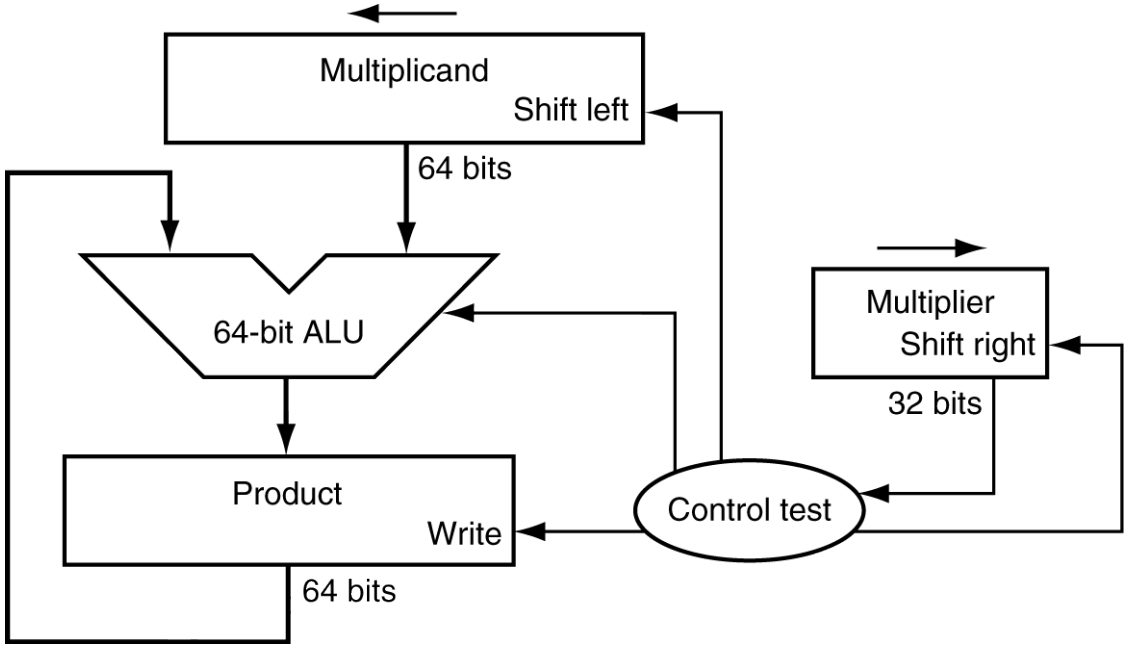

ALU

What's ALU?

1. ALU stands for: Arithmetic Logic Unit
2. ALU is a digital circuit that performs Arithmetic (Add, Sub, . . .) and Logical (AND, OR, NOT) operations.
3. John Von Neumann proposed the ALU in 1945 when he was working on EDVAC.

Typical Schematic Symbol of an ALU

A and B: the inputs to the ALU (aka operands)
R: Output or Result
F: Code or Instruction from the Control Unit (aka as op-code)
D: Output status; it indicates cases such as:

- carry-in
- carry-out,
- overflow,
- division-by-zero
- And . . .

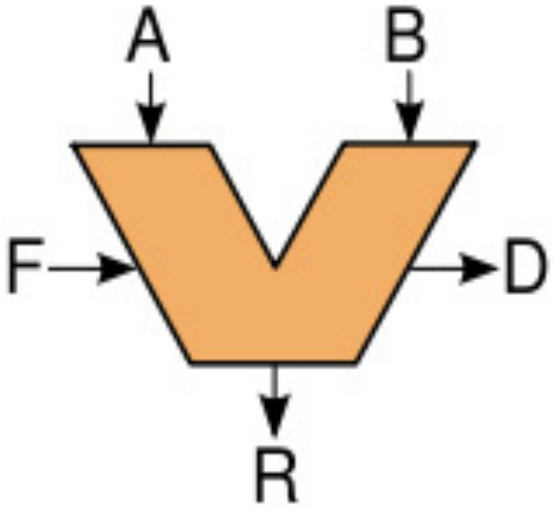

Let's Build a 1-Bit ALU

This is an one-bit ALU which can do Logical AND and Logical OR operation.

Result = a AND b when operation = 0

Result = a OR b when operation = 1

The operation line is the input of a MUX.

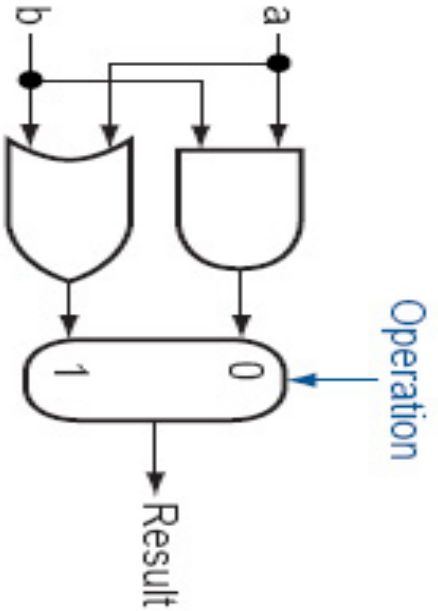

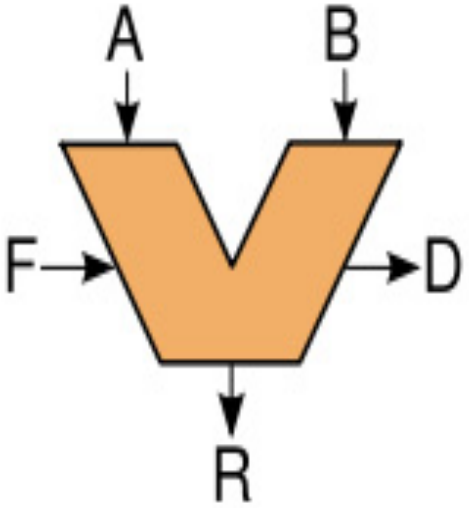

Building a 1-Bit ALU (cont'd)

Adding a full adder to our ALU

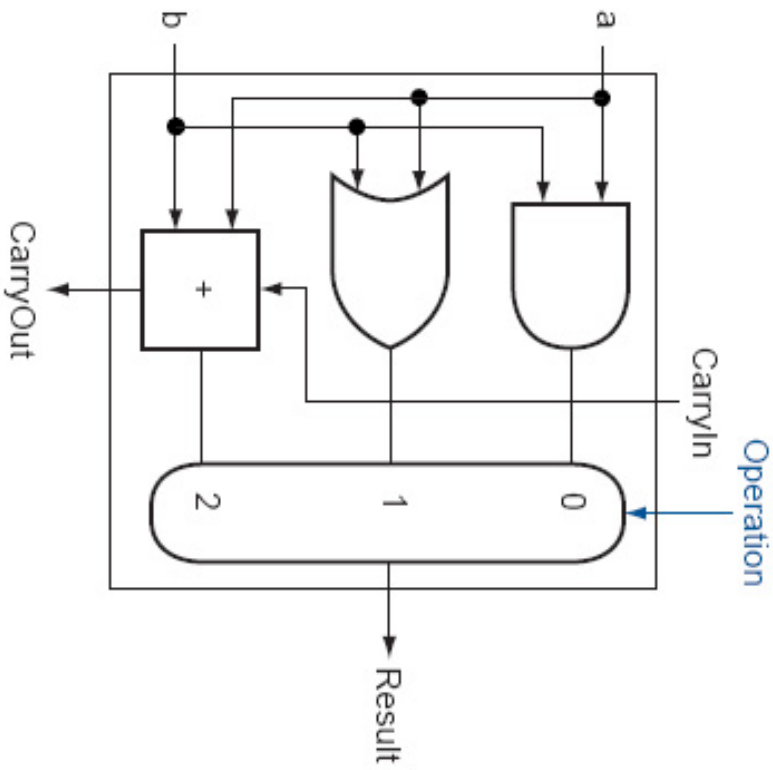

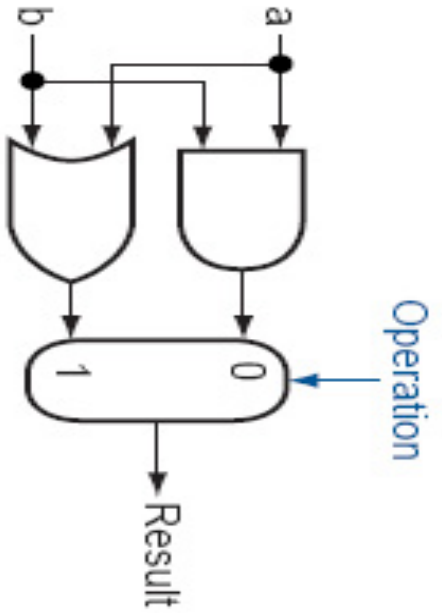

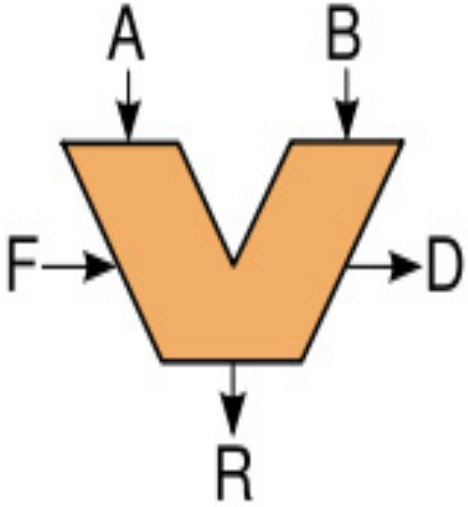

A 32-Bit ALU

By paralleling the one-bit ALUs and some other modification on the logical circuits, we can create bigger ALUs.

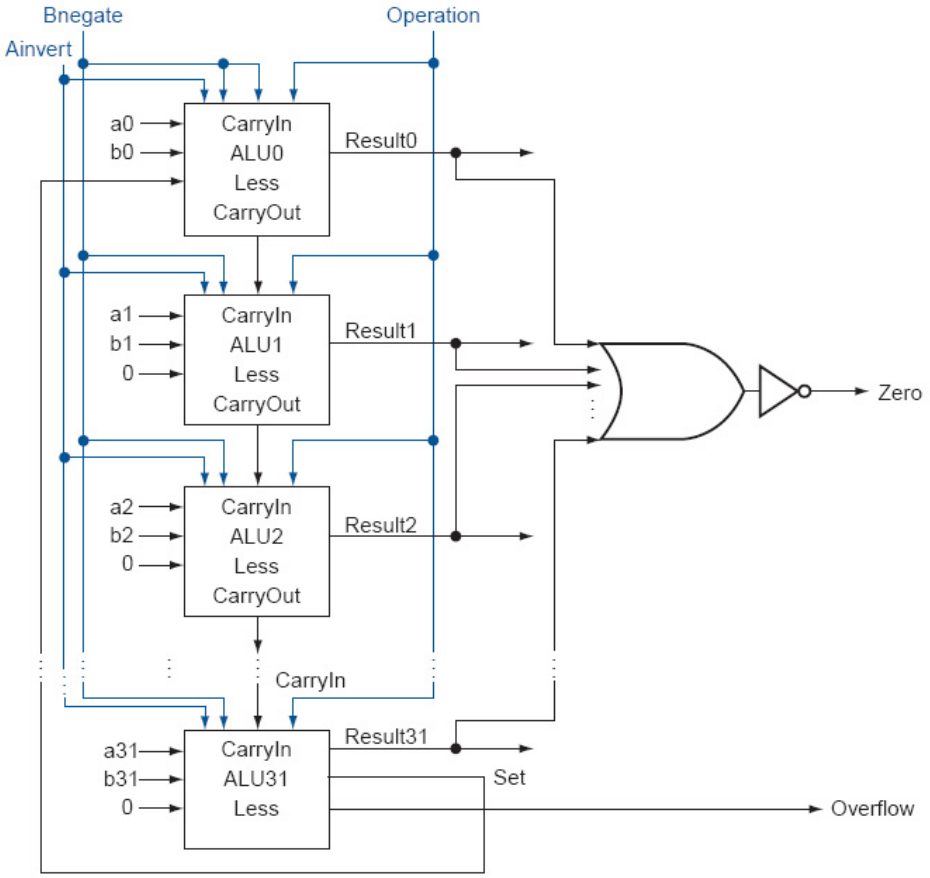

Optimized Multiplier

- Perform steps in parallel: add/shift

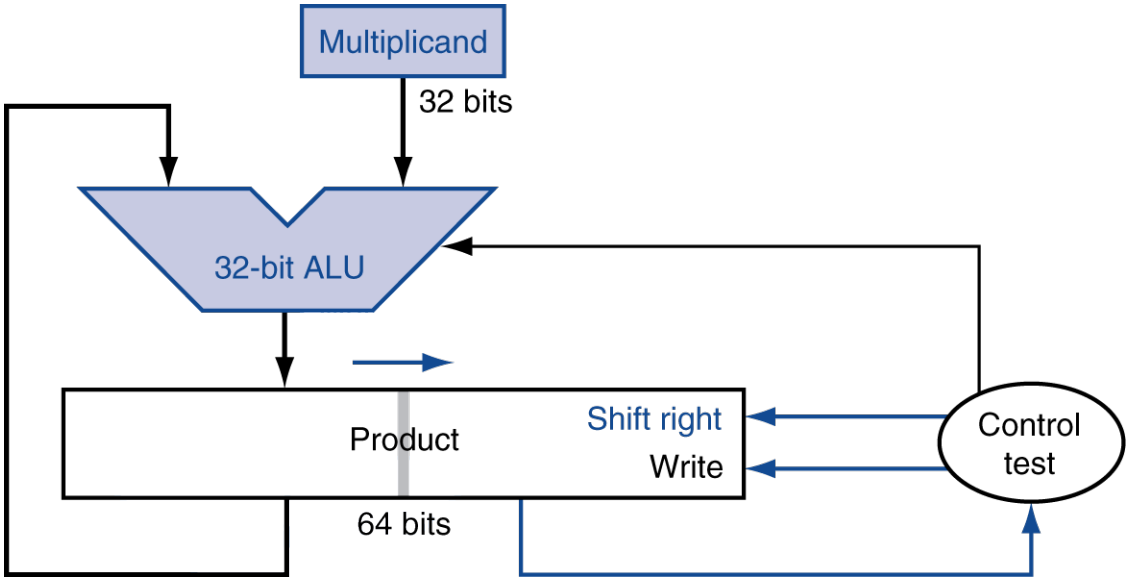

Faster Multiplier

- Uses multiple adders
  - Cost/performance tradeoff

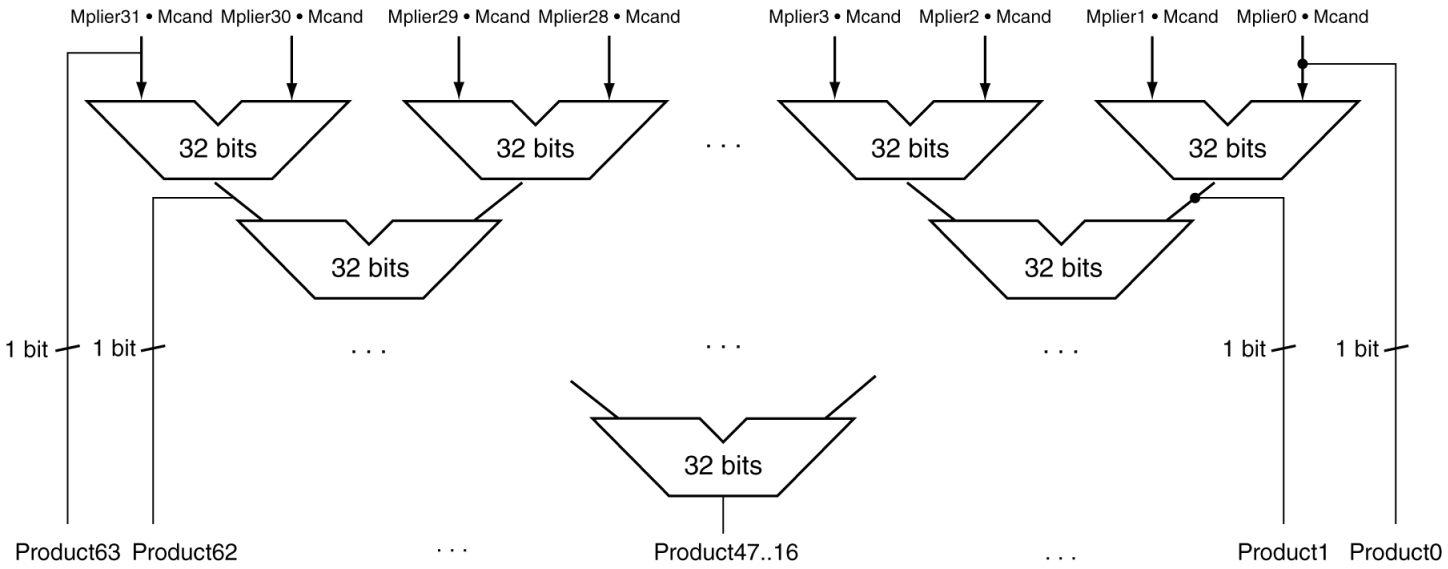

- Can be pipelined
  - Several multiplication performed in parallel

MIPS Multiplication

- Two 32-bit registers for product
  - HI: most-significant 32 bits
  - LO: least-significant 32-bits
- Instructions
  - `mult rs, rt / multu rs, rt`
    - 64-bit product in HI/LO
  - `mfhi rd / mflo rd`
    - Move from HI/LO to rd
    - Can test HI value to see if product overflows 32 bits
  - `mul rd, rs, rt`
    - Least-significant 32 bits of product –> rd

Example Exercise: (Handout) – WPS

- This problem covers 4-bit binary multiplication. Fill in the table for the Product, Multiplier and Multiplicand for each step. You need to provide the DESCRIPTION of the step being performed (shift left, shift right, add, no add). The value of M (Multiplicand) is 1011, Q (Multiplier) is initially 1010.

DIVISION

Division

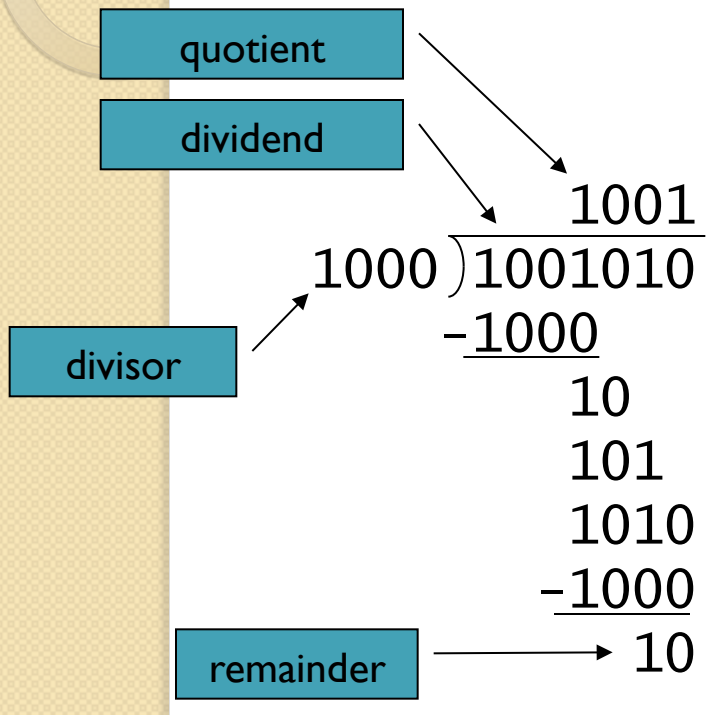

n-bit operands yield *n*-bit quotient and remainder

- Check for 0 divisor
- Long division approach
  - If divisor ≤ dividend bits
    - 1 bit in quotient, subtract
  - Otherwise
    - 0 bit in quotient, bring down next dividend bit
- Restoring division
  - Do the subtract, and if remainder goes < 0, add divisor back

Division Hardware

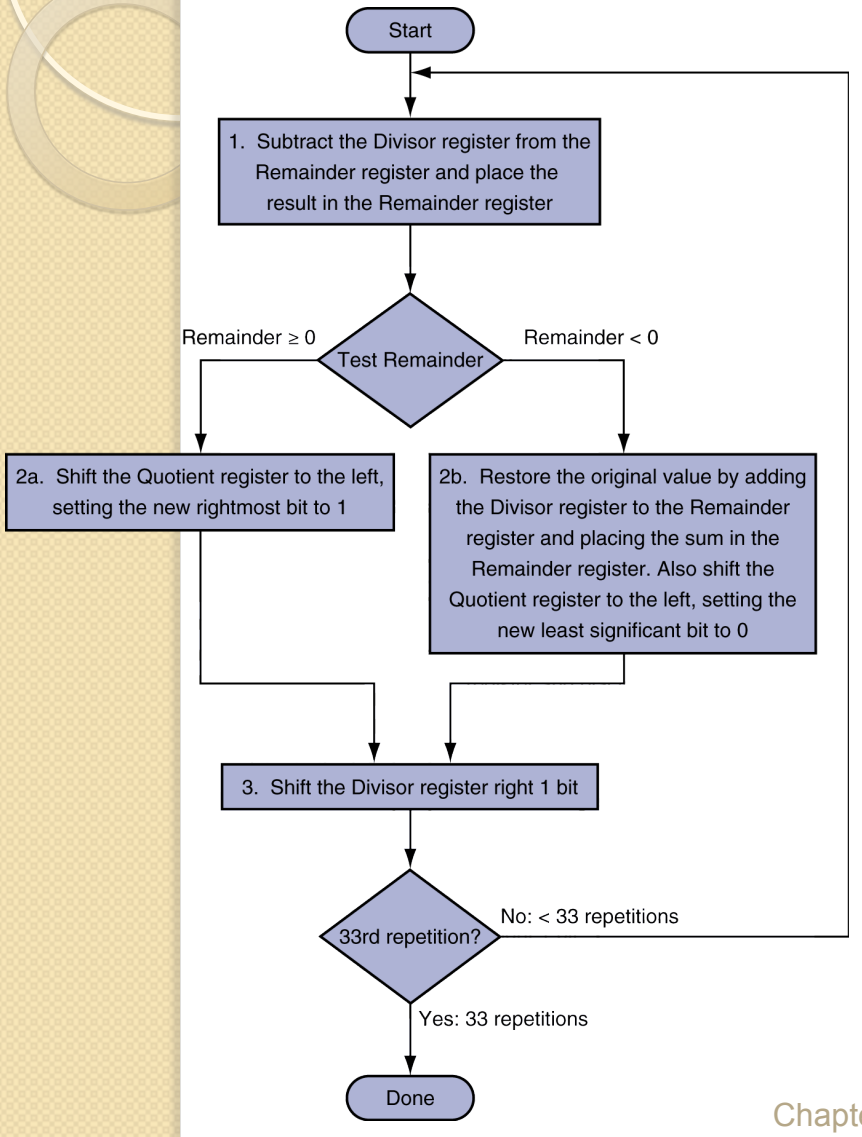

Example:

7/2 ?

Hardware

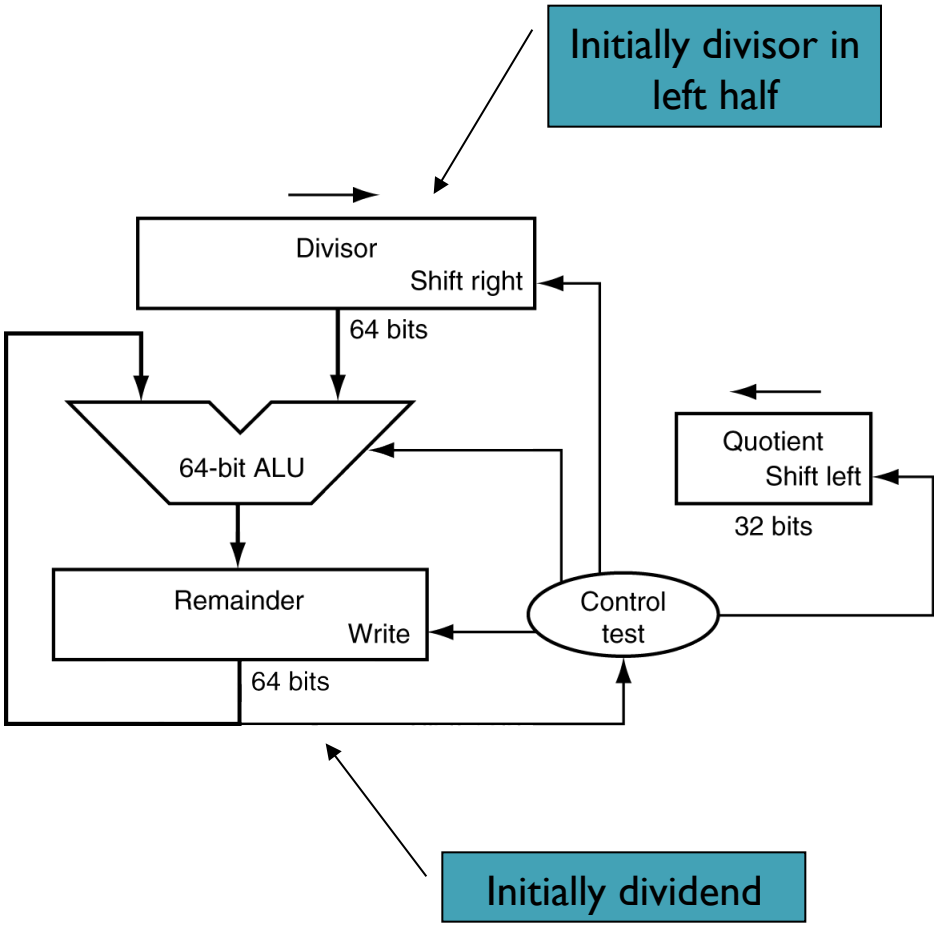
Initially divisor in left half
Divisor
Shift right
64 bits
64-bit ALU
Quotient
Shift left
32 bits
Remainder
Write
Control test
64 bits
Initially dividend

MIPS Division

- Use HI/LO registers for result
  - HI: 32-bit remainder
  - LO: 32-bit quotient
- Instructions
  - `div rs, rt / divu rs, rt`
  - No overflow or divide-by-0 checking
    - Software must perform checks if required
  - Use `mfhi`, `mflo` to access result

Electronics -> Asteroids!

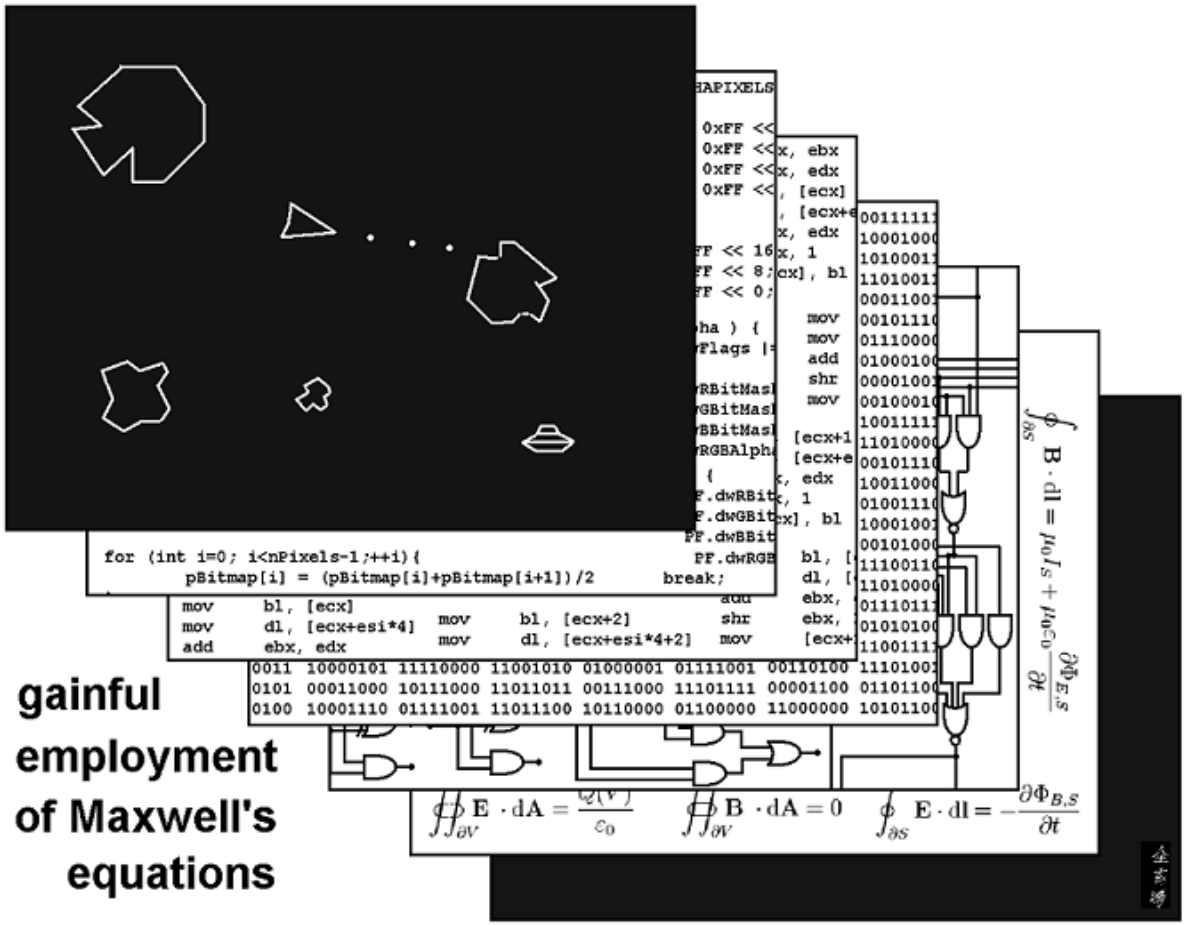

Floating Point Representation

Floating Point

- Representation for non-integral numbers
  - Including very small and very large numbers
- Like scientific notation
  - -2.34×10^{56}
  - $+0.002 \times 10^{-4}$
  - $+987.02 \times 10^{9}$

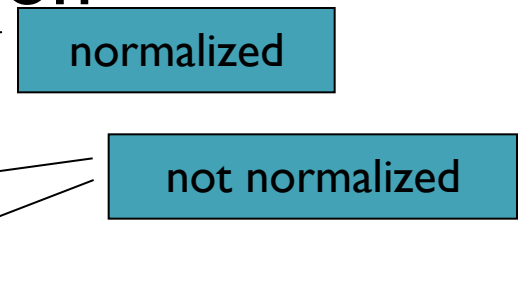

- In binary
  - $\pm 1.xxxxxxx_2 \times 2^{yyyy}$
- Types `float` and `double` in C

Tradeoff between fraction and exponent

- What's the effect ?

Overflow and underflow?

- Overflow: Exponent is too large to be represented in the bits
- Underflow: a non-zero fraction that is to small to be represented (negative exponent to large to be represented in the bits)

Floating Point Standard

- Defined by IEEE Std 754-1985
- Developed in response to divergence of representations
  - Portability issues for scientific code
- Now almost universally adopted
- Two representations
  - Single precision (32-bit)
  - Double precision (64-bit)

IEEE Floating-Point Format

single: 8 bits
double: 11 bits

single: 23 bits
double: 52 bits

$$x = (-1)^S \times (1 + \text{Fraction}) \times 2^{(\text{Exponent} - \text{Bias})}$$

- S: sign bit (0 ⇒ non-negative, 1 ⇒ negative)
- Normalize significand: 1.0 ≤ |significand| < 2.0
  - Always has a leading pre-binary-point 1 bit, so no need to represent it explicitly (hidden bit)
  - Significand is Fraction with the "1." restored
- Exponent: excess representation: actual exponent + Bias
  - Ensures exponent is unsigned
  - Single: Bias = 127; Double: Bias = 1203

Single-Precision Range

- Exponents 00000000 and 11111111 reserved
- Smallest value
  - Exponent: 00000001
    $\Rightarrow$ actual exponent = 1 – 127 = –126
  - Fraction: 000…00 $\Rightarrow$ significand = 1.0
  - $\pm 1.0 \times 2^{-126} \approx \pm 1.2 \times 10^{-38}$
- Largest value
  - exponent: 11111110
    $\Rightarrow$ actual exponent = 254 – 127 = +127
  - Fraction: 111…11 $\Rightarrow$ significand $\approx$ 2.0
  - $\pm 2.0 \times 2^{+127} \approx \pm 3.4 \times 10^{+38}$

Double-Precision Range

- Exponents 0000…00 and 1111…11 reserved
- Smallest value
  - Exponent: 00000000001
    ⇒ actual exponent = 1 – 1023 = –1022
  - Fraction: 000…00 ⇒ significand = 1.0
  - $\pm 1.0 \times 2^{-1022} \approx \pm 2.2 \times 10^{-308}$
- Largest value
  - Exponent: 11111111110
    ⇒ actual exponent = 2046 – 1023 = +1023
  - Fraction: 111…11 ⇒ significand ≈ 2.0
  - $\pm 2.0 \times 2^{+1023} \approx \pm 1.8 \times 10^{+308}$

Floating-Point Example

- What number is represented by the single-precision float

  1 10000001 01000…00

  - S = 1
  - Fraction = $01000\ldots00_2$
  - Exponent = 10000001_2 = 129

Floating-Point Example

- Represent –0.75
  - $-0.75 = (-1)^1 \times 1.1_2 \times 2^{-1}$
  - S = 1
  - Fraction = $1000\ldots00_2$
  - Exponent = –1 + Bias
    - Single: –1 + 127 = 126 = 01111110_2
    - Double: –1 + 1023 = 1022 = 01111111110_2
- Single: 10111111010000…00
- Double: 10111111111010000…00

Denormal Numbers

- Exponent = 000...0 $\Rightarrow$ hidden bit is 0

$$x = (-1)^S \times (0 + \text{Fraction}) \times 2^{-\text{Bias}}$$

- Denormal with fraction = 000...0

$$x = (-1)^S \times (0 + 0) \times 2^{-\text{Bias}} = \pm 0.0$$

Two representations of 0.0!

Infinities and NaNs

- Exponent = 111...1, Fraction = 000...0
  - ±Infinity
  - Can be used in subsequent calculations, avoiding need for overflow check
- Exponent = 111...1, Fraction ≠ 000...0
  - Not-a-Number (NaN)
  - Indicates illegal or undefined result
    - e.g., 0.0 / 0.0
  - Can be used in subsequent calculations

Floating-Point Addition

- Consider a 4-digit decimal example
  - $9.999 \times 10^{1} + 1.610 \times 10^{-1}$
- 1. Align decimal points
  - Shift number with smaller exponent
  - $9.999 \times 10^{1} + 0.016 \times 10^{1}$
- 2. Add significands
  - $9.999 \times 10^{1} + 0.016 \times 10^{1} = 10.015 \times 10^{1}$
- 3. Normalize result & check for over/underflow
  - 1.0015×10^{2}
- 4. Round and renormalize if necessary
  - 1.002×10^{2}

Example (WPS)

- 0.5 + –0.4375

- Add using binary notation

Floating-Point Addition

- Now consider a 4-digit binary example
  - $1.000_2 \times 2^{-1} + -1.110_2 \times 2^{-2}$ (0.5 + –0.4375)
- 1. Align binary points
  - Shift number with smaller exponent
  - $1.000_2 \times 2^{-1} + -0.111_2 \times 2^{-1}$
- 2. Add significands
  - $1.000_2 \times 2^{-1} + -0.111_2 \times 2^{-1} = 0.001_2 \times 2^{-1}$
- 3. Normalize result & check for over/underflow
  - $1.000_2 \times 2^{-4}$, with no over/underflow
- 4. Round and renormalize if necessary
  - $1.000_2 \times 2^{-4}$ (no change) = 0.0625

FP Adder Hardware

- Much more complex than integer adder
- Doing it in one clock cycle would take too long
  - Much longer than integer operations
  - Slower clock would penalize all instructions
- FP adder usually takes several cycles
  - Can be pipelined

Recap

- Floating Point Addition
  - What are the 4 steps ?

FP Adder Hardware

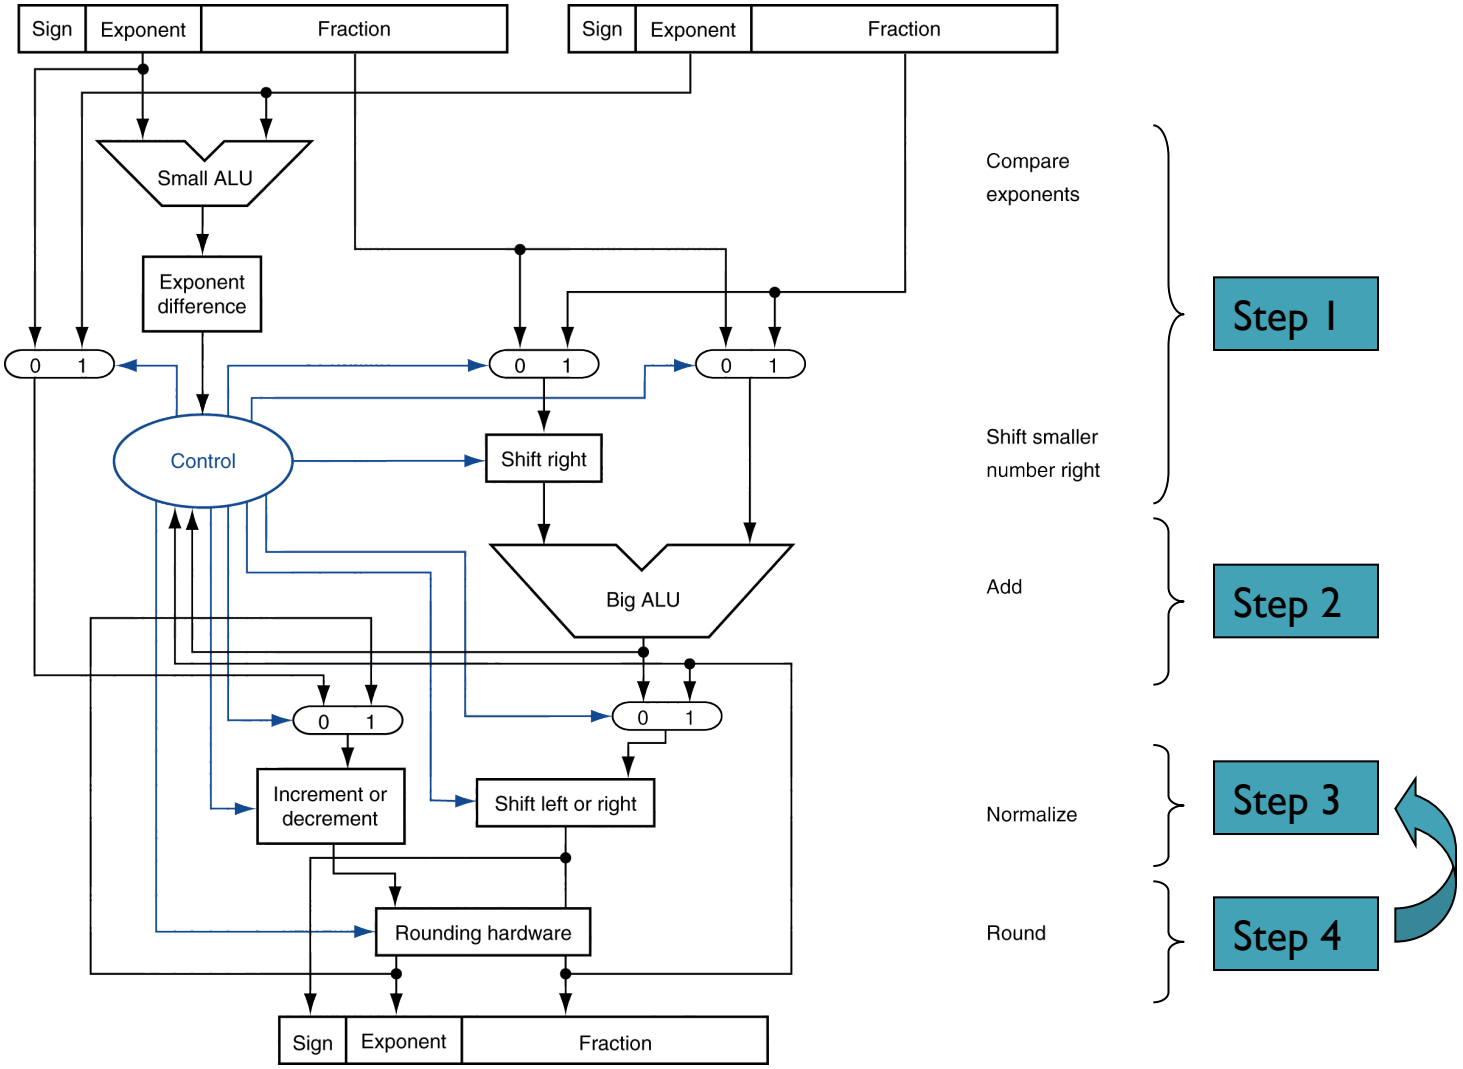

Floating-Point Multiplication

- Consider a 4-digit decimal example
  - $1.110 \times 10^{10} \times 9.200 \times 10^{-5}$
- 1. Add exponents
  - New exponent = 10 + –5 = 5
- 2. Multiply significands
  - $1.110 \times 9.200 = 10.212 \Rightarrow 10.212 \times 10^{5}$
- 3. Normalize result & check for over/underflow
  - 1.0212×10^{6}
- 4. Round and renormalize if necessary
  - 1.021×10^{6}
- 5. Determine sign of result from signs of operands
  - $+1.021 \times 10^{6}$

Floating-Point Multiplication

- Now consider a 4-digit binary example
  - $1.000_2 \times 2^{-1} \times -1.110_2 \times 2^{-2}$ (0.5 × –0.4375)
- 1. Add exponents
  - Unbiased: –1 + –2 = –3
  - Biased: (–1 + 127) + (–2 + 127) = –3 + 254 – 127 = –3 + 127
- 2. Multiply significands
  - $1.000_2 \times 1.110_2 = 1.110 \Rightarrow 1.110_2 \times 2^{-3}$
- 3. Normalize result & check for over/underflow
  - $1.110_2 \times 2^{-3}$ (no change) with no over/underflow
- 4. Round and renormalize if necessary
  - $1.110_2 \times 2^{-3}$ (no change)
- 5. Determine sign: +ve × –ve ⇒ –ve
  - $-1.110_2 \times 2^{-3} = -0.21875$

FP Arithmetic Hardware

- FP multiplier is of similar complexity to FP adder
  - But uses a multiplier for significands instead of an adder
- FP arithmetic hardware usually does
  - Addition, subtraction, multiplication, division, reciprocal, square-root
  - FP ↔ integer conversion
- Operations usually takes several cycles
  - Can be pipelined

FP Instructions in MIPS

- FP hardware is coprocessor
  - Adjunct processor that extends the ISA
- Separate FP registers
  - 32 single-precision: $f0, $f1, … $f31
  - Paired for double-precision: $f0/$f1, $f2/$f3, …
    - Release 2 of MIPs ISA supports 32 × 64-bit FP reg's
- FP instructions operate only on FP registers
  - Programs generally don't do integer ops on FP data, or vice versa
  - More registers with minimal code-size impact
- FP load and store instructions
  - `lwc1`, `ldc1`, `swc1`, `sdc1`
    - e.g., `ldc1 $f8, 32($sp)`

FP Instructions in MIPS

- Single-precision arithmetic
  - `add.s`, `sub.s`, `mul.s`, div.s
    - e.g., `add.s $f0, $f1, $f6`
- Double-precision arithmetic
  - `add.d`, `sub.d`, `mul.d`, `div.d`
    - e.g., `mul.d $f4, $f4, $f6`
- Single- and double-precision comparison
  - `c.`*xx*`.s`, `c.`*xx*`.d` (*xx* is eq, `lt`, `le`, …)
  - Sets or clears FP condition-code bit
    - e.g. `c.lt.s $f3, $f4`
- Branch on FP condition code true or false
  - `bc1t`, `bc1f`
    - e.g., `bc1t TargetLabel`

FP Example: °F to °C

- C code:

```
float f2c (float fahr) {
  return ((5.0/9.0)*(fahr - 32.0));
}
```

  - fahr in $f12, result in $f0, literals in global memory space
- Compiled MIPS code:

```
f2c: lwc1  $f16, const5($gp)
     lwc1  $f18, const9($gp)
     div.s $f16, $f16, $f18
     lwc1  $f18, const32($gp)
     sub.s $f18, $f12, $f18
     mul.s $f0,  $f16, $f18
     jr    $ra
```

Guard, Round and Sticky bit

- Add 2.56×10^0 to 2.34×10^2
- Assume that we have 3 significant decimal digits.

Interpretation of Data

The BIG Picture

- Bits have no inherent meaning
  - Interpretation depends on the instructions applied
- Computer representations of numbers
  - Finite range and precision
  - Need to account for this in programs

Associativity

- Parallel programs may interleave operations in unexpected orders
  - Assumptions of associativity may fail

		(x+y)+z	x+(y+z)
x	-1.50E+38		-1.50E+38
y	1.50E+38	0.00E+00	
z	1.0	1.0	1.50E+38
		1.00E+00	0.00E+00

- Need to validate parallel programs under varying degrees of parallelism

Who Cares About FP Accuracy?

- Important for scientific code
  - But for everyday consumer use?
    - "My bank balance is out by 0.0002¢!" ☹
- The Intel Pentium FDIV bug
  - The market expects accuracy
  - See Colwell, *The Pentium Chronicles*

Concluding Remarks

- ISAs support arithmetic
  - Signed and unsigned integers
  - Floating-point approximation to reals
- Bounded range and precision
  - Operations can overflow and underflow
- MIPS ISA
  - Core instructions: 54 most frequently used
    - 100% of SPECINT, 97% of SPECFP
  - Other instructions: less frequent