


1.

Classification Report (base_model):


	precision	recall	f1-score	support
Attack	1.00	1.00	1.00	11843
Normal	1.00	1.00	1.00	13352
accuracy			1.00	25195
macro avg	1.00	1.00	1.00	25195
weighted avg	1.00	1.00	1.00	25195

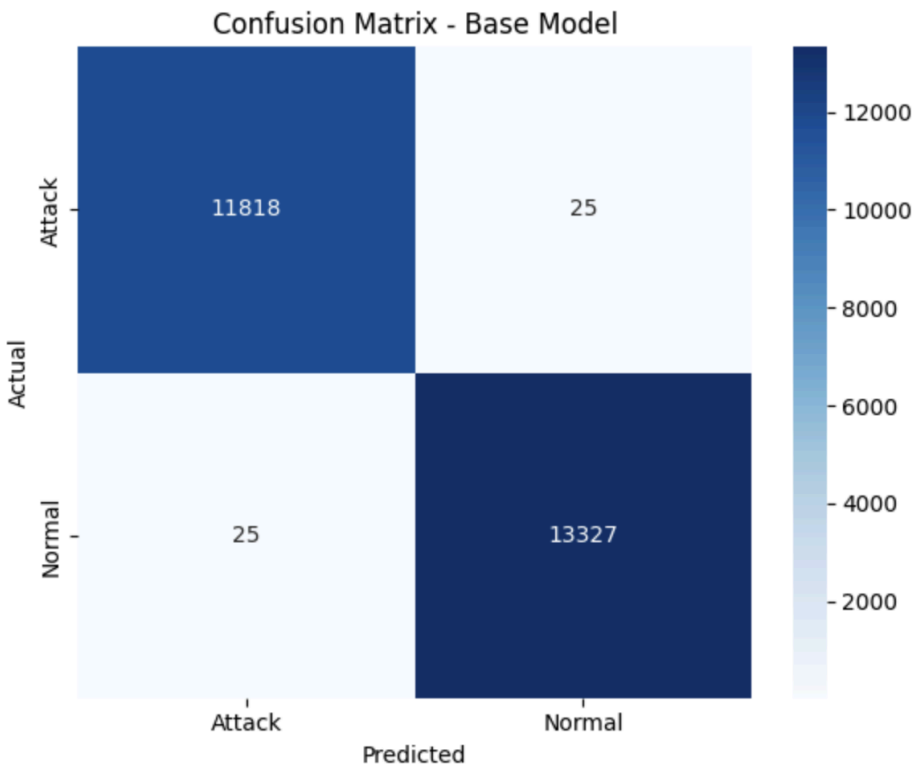


2.

Classification Report (tflite_quant_model):

	precision	recall	f1-score	support
Attack	1.00	1.00	1.00	11843
Normal	1.00	1.00	1.00	13352
accuracy			1.00	25195
macro avg	1.00	1.00	1.00	25195
weighted avg	1.00	1.00	1.00	25195

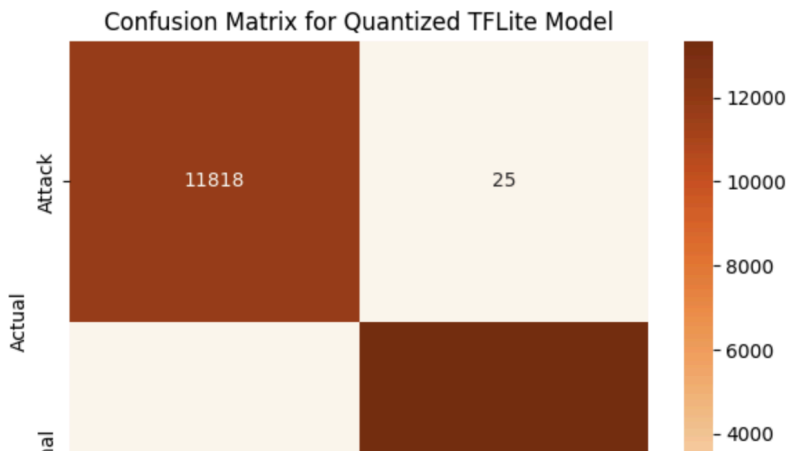

3.

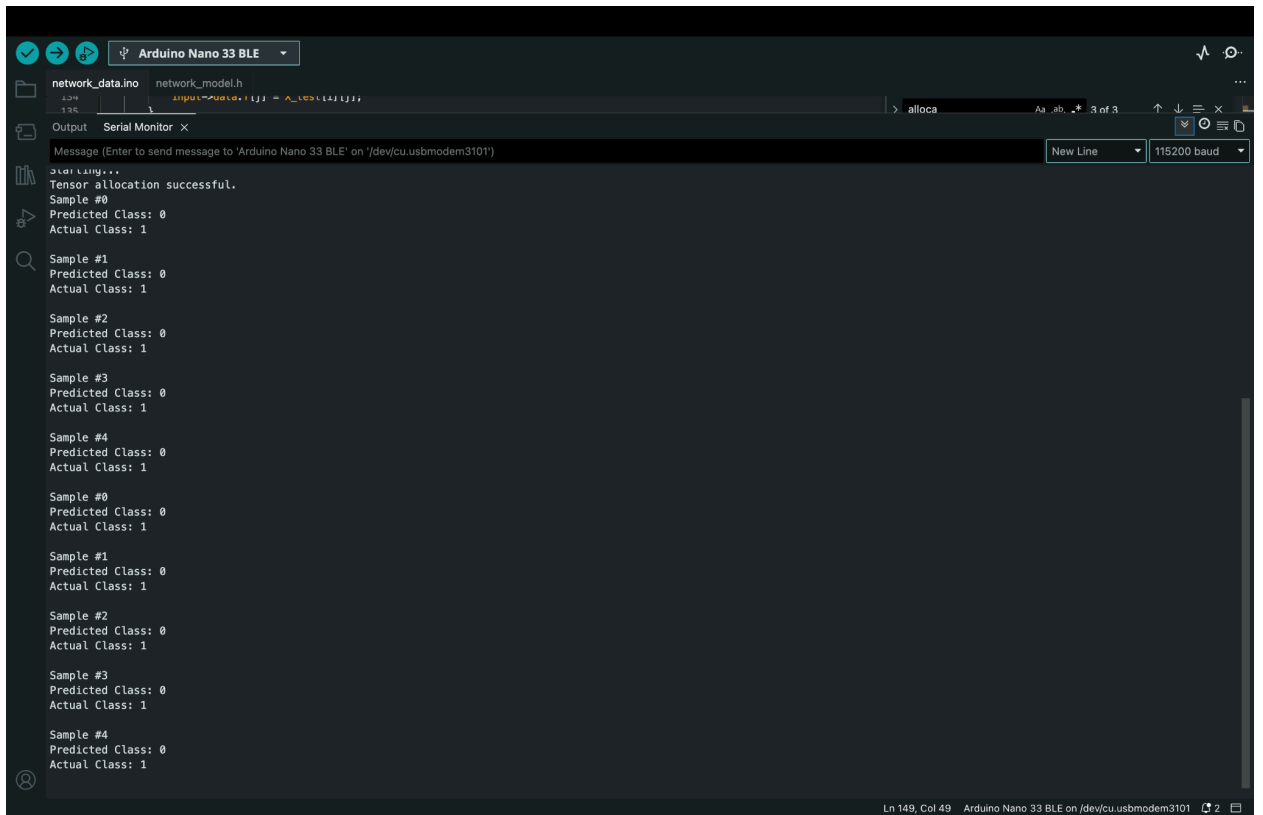

The screenshot shows the Arduino IDE interface with the 'Serial Monitor' window open. The top toolbar indicates the board is 'Arduino Nano 33 BLE'. The code editor shows 'network_data.ino' and 'network_model.h'. The Serial Monitor displays the following output:

```
Message (Enter to send message to 'Arduino Nano 33 BLE' on '/dev/cu.usbmodem3101')
New Line 115200 baud

xoxoxox...
Tensor allocation successful.
Sample #0
Predicted Class: 0
Actual Class: 1

Sample #1
Predicted Class: 0
Actual Class: 1

Sample #2
Predicted Class: 0
Actual Class: 1

Sample #3
Predicted Class: 0
Actual Class: 1

Sample #4
Predicted Class: 0
Actual Class: 1

Sample #0
Predicted Class: 0
Actual Class: 1

Sample #1
Predicted Class: 0
Actual Class: 1


Sample #2
Predicted Class: 0
Actual Class: 1

Sample #3
Predicted Class: 0
Actual Class: 1

Sample #4
Predicted Class: 0
Actual Class: 1
```

The status bar at the bottom indicates 'Ln 149, Col 49' and 'Arduino Nano 33 BLE on /dev/cu.usbmodem3101'.

4.

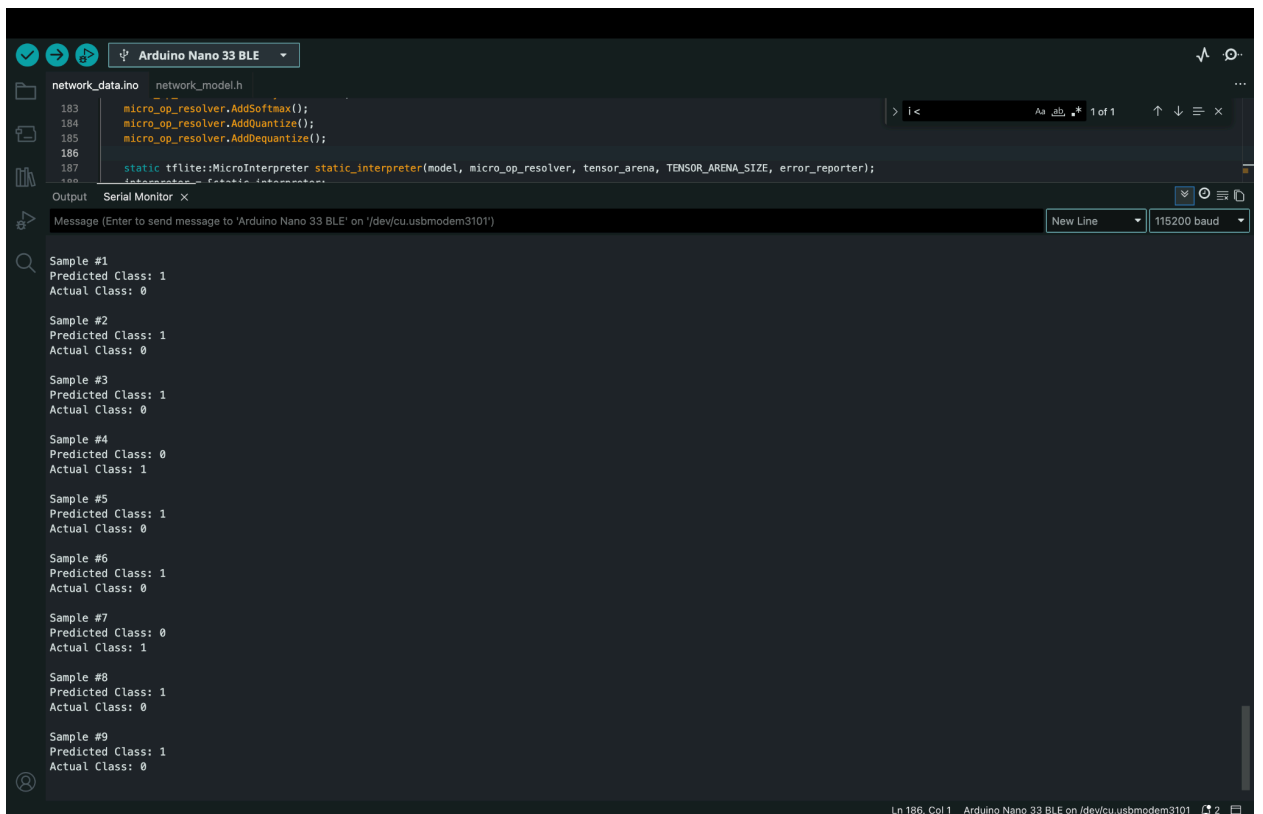

The screenshot shows the Arduino IDE interface with the 'Serial Monitor' window open. The top toolbar indicates the board is 'Arduino Nano 33 BLE'. The code editor shows 'network_data.ino' and 'network_model.h'. The Serial Monitor displays the following output:

```
Message (Enter to send message to 'Arduino Nano 33 BLE' on '/dev/cu.usbmodem3101')
New Line 115200 baud

Sample #1
Predicted Class: 1
Actual Class: 0

Sample #2
Predicted Class: 1
Actual Class: 0

Sample #3
Predicted Class: 1
Actual Class: 0

Sample #4
Predicted Class: 0
Actual Class: 1

Sample #5
Predicted Class: 1
Actual Class: 0

Sample #6
Predicted Class: 1
Actual Class: 0

Sample #7
Predicted Class: 0
Actual Class: 1

Sample #8
Predicted Class: 1
Actual Class: 0

Sample #9
Predicted Class: 1
Actual Class: 0
```

The status bar at the bottom indicates 'Ln 186, Col 1' and 'Arduino Nano 33 BLE on /dev/cu.usbmodem3101'.