IoT – Based Smart Helmet for Industry Workers

By

Ravi Ranjan (10300320121)

Raviraj Kumar (10300320123)

Ranjeet Abhigyan (10300320118)

Ranjeet Kumar (10300320119)

Raushan Singh (10300320120)

A Project Thesis submitted to Haldia Institute of Technology In Partial Fulfillment of the Requirements for Degree of B.Tech in Electronics & Communication Engineering, Maulana Abul Kalam Azad University of Technology, Formerly known as West Bengal University of Technology

UNDER THE SUPERVISION OF
Dr. Kushal Roy
Assistant Professor

DEPARTMENT OF ELECTRONICS & COMMUNICATON ENGINEERING
HALDIA INSTITUTE OF TECHNOLOGY
2024

HALDIA INSTITUTE OF TECHNOLOGY

(An Institution of ICARE)

(Approved by AICTE, New Delhi)

(Affiliated to Maulana Abul Kalam Azad University of Technology, West Bengal)

(Formerly known as West Bengal University of Technology-WBUT)   PO
– HIT, Haldia, Dist – East Medinipur, West Bengal, Pin – 721657, West, INDIA

CERTIFICATE

This is to certify that the thesis entitled "**IOT Based Smart Helmet for Industry Workers**" submitted by Ravi Ranjan, Raviraj Kumar, Ranjeet Kumar, Ranjeet Abhigyan and Raushan Singh absolutely based upon their work under the supervision of Mr. Kushal Roy, Assistant Professor and neither this thesis nor any part of it has been submitted for any degree/diploma or any other academic award anywhere before.

……………………   …………………….

(Prof. (Dr.) Chanchal Kumar Dey)   Dr. Kushal Roy

HOD of Electronics & Communication Engineering   Assistant Professor

Haldia Institute of Technology   Haldia Institute of Technology

Ph.: (03224) 252850/253062, EPABX : 252900/253061/255615/255616/255617, Tele Fax:
(03224) 252800/25306 E-mail : hithaldia@yahoo.com, admin@hithaldia.in
Website:www.hithaldia.in

CERTIFICATE OF APPROVAL

The preceding thesis entitled "**IOT Based Smart Helmet For Industry Workers**" is now approved as a creditable study of an engineering subject carried out and presented satisfactorily to warrant its acceptance as a pre-requisite for the degree it has been submitted. It is understood that by this approval the undersigned do not necessarily endorse or approve any statement made, opinion expressed or conclusion drawn therein but approve the thesis only for the purpose for which it is submitted.

Committee for evaluation of the project

_____   _____   _____

ACKNOWLEDGMENT

I would like to express my heartfelt gratitude to Supervisor Dr. Kushal Roy for their unwavering support, guidance, and mentorship throughout the duration of this project. Their expertise and encouragement have been invaluable, and I am truly grateful for the opportunity to learn under their supervision.

I am deeply indebted to Dr. Chanchal Kumar Dey, the Head of our Department, for their continuous support and encouragement. Their leadership and vision have created an environment conducive to learning and growth, for which I am truly thankful.

I extend my sincere appreciation to all the teachers in our department for their dedication and commitment to nurturing our academic and personal development. Their passion for teaching has inspired me to strive for excellence in all my endeavours.

To my classmates, I am grateful for your camaraderie, encouragement, and shared experiences. Your support has made this journey enjoyable and memorable. Together, we have overcome challenges and celebrated successes, and for that, I am thankful.

Lastly, I would like to thank my family for their unconditional love and support throughout this academic journey. Their belief in me has been a constant source of strength and motivation.

Thank you all for your contributions, guidance, and friendship. This project would not have been possible without each and every one of you.

With heartfelt appreciation,

Ravi Ranjan (10300320121)

Raviraj Kumar (10300320123)

Ranjeet Kumar (10300320119)

Ranjeet Abhigyan (10300320118)

Raushan Singh (20-ECE-123)

ABSTRACT

KEYWORDS: **INDUSTRIES, HELMETS, CLOUD COMPUTING, THINGSPEAK, INTERNET OF THINGS, SENSORS, UBIQUITOUS SENSING**.

Safety is very important in every workplace, but very often we hear about accidents in factories

and industries causing loss of life. The labourers and workers working in any factory, industries, construction site or mine are vulnerable to accidents and therefore they should be with safety guards properly. In most of the accidents, the number of deaths or severe injuries is maximized because the labourers and workers are not wearing safety equipment or wearing low-grade safety equipment.

Working environment hazards include radiation leakage, falls due to suffocation, poisoning gas leakage and gas explosion. Hence air quality and hazardous event detection is a very important factor in industry. In order to achieve those safety measures, the proposed system provides a wireless sensor network for monitoring the real-time situation of the working environment from the monitoring station.

CONTENTS

Title   **Page**

LIST OF FIGURES

CHAPTER-1

INTRODUCTION

In today's rapidly evolving industrial landscape, ensuring the safety and well-being of workers remains a paramount concern for organizations worldwide. Industrial sectors such as manufacturing, construction, mining, and logistics inherently involve various hazards that pose risks to workers' health and safety. Despite significant advancements in safety protocols and equipment, workplace accidents and injuries continue to occur, underscoring the need for innovative solutions to enhance occupational safety.

In response to these challenges, the integration of Internet of Things (IoT) technologies has emerged as a game-changer in revolutionizing industrial safety practices. Among the most promising developments in this realm is the advent of IoT-based smart helmets designed specifically for industry workers. These cutting-edge helmets combine the robust protective features of traditional safety headgear with advanced IoT capabilities, creating a holistic safety solution tailored to the modern industrial environment.

At its core, an IoT-based smart helmet is a sophisticated wearable device equipped with an array of sensors, communication modules, and data processing capabilities. These helmets are designed to continuously monitor various environmental parameters, physiological indicators, and worker activities in real-time. By leveraging data analytics and connectivity, they provide invaluable insights into potential safety risks, proactive hazard identification, and timely intervention strategies.

The introduction of IoT-enabled functionalities into industrial helmets brings forth a myriad of benefits for both employers and workers alike. For employers, these smart helmets offer enhanced visibility into workplace safety conditions, enabling proactive risk management and compliance with regulatory standards. Real-time monitoring and analytics empower decision-makers to identify trends, implement preventive measures, and optimize operational processes to mitigate safety hazards effectively.

Moreover, IoT-based smart helmets contribute to fostering a safety-centric culture within organizations by promoting worker accountability and engagement. By providing workers with real-time feedback on their safety behaviours and environmental conditions, these helmets encourage adherence to safety protocols and empower individuals to take proactive measures to protect themselves and their colleagues.

For workers, IoT-enabled smart helmets represent a significant advancement in personal protective equipment (PPE), offering not only superior physical protection but also invaluable situational awareness and support. Equipped with features such as built-in cameras, heads-up displays (HUDs), and augmented reality (AR) overlays, these helmets empower workers with enhanced visibility, remote assistance, and contextual information, thereby facilitating informed decision-making and task execution in dynamic industrial environments.

Furthermore, the integration of IoT functionalities enables smart helmets to facilitate seamless communication and collaboration among workers, supervisors, and safety personnel. Through wireless connectivity and IoT platforms, workers can share critical information, receive real-time alerts, and access remote assistance, fostering a collaborative approach to safety management and incident response.

In conclusion, the integration of IoT-based smart helmets in industrial settings marks a transformative leap forward in ensuring worker safety. These intelligent helmets offer a multifaceted approach to safety management, combining advanced technology with practical functionality. By providing real-time monitoring, data-driven insights, and enhanced communication capabilities, these helmets empower both employers and workers to proactively mitigate risks, respond effectively to incidents, and cultivate a culture of safety consciousness. As industries continue to evolve, embracing IoT-enabled solutions like smart helmets will undoubtedly play a pivotal role in safeguarding the well-being of our workforce and shaping a safer future for all.

CHAPTER-2

BACKGROUND & MOTIVATION

The development of IoT-based smart helmets for industry workers stems from a combination of factors within the industrial landscape, each contributing to the pressing need for innovative safety solutions. Here's a detailed exploration of the background and motivations behind this project:

Persistent Safety Challenges: Despite significant advancements in safety regulations, training, and equipment, industrial workplaces continue to face numerous safety challenges. Industries such as manufacturing, construction, mining, and logistics inherently involve hazards such as falls, collisions, exposure to harmful substances, and machinery accidents. Addressing these risks effectively requires proactive measures and real-time monitoring of safety conditions.

Limitations of Traditional Safety Gear: While traditional personal protective equipment (PPE) like helmets, gloves, and safety vests offer vital protection against physical hazards, they have limitations in providing real-time insights into environmental conditions and worker activities. This gap in visibility makes it challenging for organizations to identify potential risks proactively and intervene in a timely manner to prevent accidents.

Advancements in IoT and Wearable Technology: The emergence of IoT and wearable technology has unlocked new possibilities for enhancing safety in industrial environments. These technologies enable the integration of sensors, communication modules, and data analytics capabilities into wearable devices, transforming them into intelligent tools for monitoring, analysis, and decision making.

Shift Towards Smart Manufacturing and Industry 4.0: The concept of Industry 4.0, characterized by the integration of automation, data exchange, and IoT technologies in manufacturing and industrial processes, has gained traction globally. As industries embrace digital transformation and smart manufacturing practices, there's a growing emphasis on leveraging IoT solutions to optimize operations, enhance safety, and improve productivity.

Focus on Worker Well-being and Productivity: Beyond regulatory compliance, organizations increasingly recognize the importance of prioritizing worker well-being and productivity. Safe working conditions not only reduce the incidence of accidents and injuries but also contribute to employee morale, retention, and overall organizational performance. By investing in advanced safety technologies, companies demonstrate their commitment to fostering a culture of safety and employee-centric practices.

Market Demand and Competitive Advantage: As safety standards evolve and customer expectations rise, there's a growing demand for innovative safety solutions that offer superior protection, functionality, and usability. Companies that invest in IoT-based smart helmets gain a competitive edge by differentiating themselves in the market, attracting top talent, and enhancing their reputation as safety-conscious organizations.

Potential for Cost Savings and Risk Mitigation: Beyond the ethical and moral imperatives of ensuring worker safety, there are tangible financial benefits associated with preventing workplace accidents. By proactively identifying and mitigating safety risks through IoT-based smart helmets, organizations can minimize costly downtime, workers' compensation claims, legal liabilities, and reputational damage resulting from accidents.

The development of IoT-based smart helmets for industry workers is driven by a confluence of critical factors within the industrial landscape. Despite advancements in safety protocols, industries such as manufacturing, construction, mining, and logistics continue to face significant safety hazards, including falls, collisions, exposure to harmful substances, and machinery accidents. Traditional personal protective equipment (PPE), while essential, falls short in offering real-time monitoring and insights into environmental conditions and worker activities, limiting proactive risk identification and timely intervention. The advent of IoT and wearable technology presents a transformative solution, enabling the integration of sensors, communication modules, and data analytics into helmets, thus converting them into intelligent safety tools. This aligns with the broader shift towards Industry 4.0, which emphasizes the digital transformation of industrial processes through automation and IoT.

Additionally, there is a growing recognition among organizations of the importance of worker wellbeing, not only for regulatory compliance but also for enhancing morale, retention, and overall performance. By investing in advanced safety technologies such as smart helmets, companies can achieve significant cost savings by mitigating risks, reducing downtime, and avoiding legal liabilities. Moreover, in a competitive market, these innovations provide a distinct advantage, enhancing an organization's reputation as a safety-conscious employer and attracting top talent. In summary, IoT-based smart helmets represent a proactive approach to overcoming persistent safety challenges in industrial settings, leveraging technology to protect workers and drive operational excellence.

In summary, the background and motivations for developing IoT-based smart helmets for industry workers are rooted in the ongoing challenges of ensuring safety in industrial settings, coupled with the transformative potential of IoT and wearable technology to address these challenges effectively. By integrating advanced sensors, connectivity, and data analytics into wearable safety gear,

organizations can elevate their safety standards, protect their workforce, and drive operational excellence in the digital age.

CHAPTER-3

OBJECTIVE AND GOALS OF THE PROJECT

The objective of developing IoT-based smart helmets for industry workers is to create a comprehensive safety solution that leverages cutting-edge technology to enhance occupational safety, mitigate risks, and improve productivity in industrial environments. The project aims to achieve the following goals:

- Enhance Worker Safety: The primary goal is to provide industry workers with advanced personal protective equipment (PPE) that offers superior protection against occupational hazards. By integrating sensors and IoT capabilities into helmets, the project aims to detect and prevent potential safety risks in real-time, thereby reducing the incidence of accidents, injuries, and fatalities.

- Real-time Monitoring and Alerts: The project seeks to enable continuous monitoring of environmental conditions, worker activities, and physiological indicators through smart helmets. By collecting and analyzing data in real-time, the system can issue timely alerts and notifications to both workers and supervisors about potential safety hazards, allowing for prompt intervention and risk mitigation.

- Improve Situational Awareness: Another objective is to enhance workers' situational awareness by providing them with real-time information about their surroundings, tasks, and potential risks. Features such as heads-up displays (HUDs), augmented reality (AR) overlays, and camera feeds enable workers to make informed decisions and take proactive measures to avoid accidents and injuries.

- Facilitate Communication and Collaboration: The project aims to facilitate seamless communication and collaboration among workers, supervisors, and safety personnel in industrial settings. By incorporating wireless connectivity and IoT platforms into smart helmets, the system enables workers to share critical information, request assistance, and coordinate emergency responses effectively.

- Promote Compliance and Accountability: By tracking and recording safety-related data, the project aims to promote compliance with regulatory standards and organizational safety protocols. Smart helmets can capture information about safety incidents, near-misses, and compliance with safety procedures, fostering accountability among workers and enabling organizations to identify areas for improvement.

- Optimize Operational Efficiency: Beyond safety benefits, the project aims to contribute to overall operational efficiency in industrial settings. By reducing the frequency and severity of accidents, organizations can minimize downtime, disruptions to production schedules, and

associated costs. Moreover, by providing workers with tools to perform their tasks more safely and efficiently, smart helmets can enhance productivity and job satisfaction.

- Drive Innovation and Differentiation: The project aims to enhance companies' safety and technological advancements through IoT-based smart helmets, improving reputation and attracting talent.

CHAPTER-4

SCOPE AND LIMITATION

The scope of IoT-based smart helmets for industry workers encompasses a wide range of functionalities and applications aimed at enhancing safety, productivity, and user experience in industrial environments. However, like any technology, there are also limitations to consider. Let's explore both the scope and limitations:

SCOPE:

1. Occupational Safety Enhancement: Smart helmets aim to significantly improve occupational safety by providing real-time monitoring of environmental conditions, detecting potential hazards, and issuing timely alerts to workers and supervisors.

2. Real-time Data Collection and Analysis: These helmets are equipped with sensors for monitoring parameters such as temperature, humidity, gas concentration, and worker physiological indicators. The collected data is analyzed in real-time to identify safety risks and trends.

3. Communication and Collaboration: Smart helmets facilitate seamless communication and collaboration among workers, supervisors, and safety personnel through features such as builtin communication systems, wireless connectivity, and IoT platforms.

4. Situational Awareness: By providing workers with augmented reality (AR) overlays, heads-up displays (HUDs), and camera feeds, smart helmets enhance situational awareness, enabling users to make informed decisions and navigate complex industrial environments more effectively.

5. Integration with IoT Ecosystem: Smart helmets can be integrated into existing IoT ecosystems within organizations, allowing for data sharing, interoperability with other devices, and centralized management of safety-related information.

6. Customization and Adaptability: The scope includes the ability to customize smart helmets according to specific industry requirements, ergonomic preferences, and user needs. Additionally, these helmets should be adaptable to different working conditions and environments.

LIMITATIONS:

1. Cost: One of the primary limitations of smart helmets is the cost associated with integrating advanced sensors, communication modules, and data processing capabilities. High initial investment costs may pose challenges for widespread adoption, particularly for small and medium-sized enterprises (SMEs).

2. Technological Complexity: Smart helmets involve complex technological components, including sensors, IoT connectivity, software algorithms, and user interfaces. Managing this complexity may require specialized skills and resources for development, deployment, and maintenance.

3. Privacy and Data Security: Collecting and processing sensitive data from workers, such as physiological indicators and location information, raises concerns about privacy and data security. Ensuring compliance with data protection regulations and implementing robust cybersecurity measures is essential to mitigate risks.

4. User Acceptance and Training: Introducing new technology into the workplace requires adequate training and support for users to understand and utilize its features effectively. Resistance to change and unfamiliarity with smart helmet functionalities may impact user acceptance and adoption rates.

5. Environmental Limitations: Smart helmets may face challenges in extreme environmental conditions, such as high temperatures, humidity, or electromagnetic interference, which could affect sensor accuracy, connectivity, and overall performance.

6. Battery Life and Maintenance: The operational duration of smart helmets is limited by battery life, especially when using power-intensive features such as augmented reality displays or continuous data transmission. Regular maintenance and charging protocols are necessary to ensure uninterrupted functionality.

CHAPTER-5

RELATED WORKS IN SMART HELMET TECHNOLOGY

Research and development in smart helmet technology have gained momentum in recent years, driven by the need to enhance safety and productivity in various domains. Here are some notable related works in the field of smart helmet technology:

- DAQRI Smart Helmet: DAQRI, a leading augmented reality (AR) technology company, developed the DAQRI Smart Helmet, designed for industrial applications. It integrates a high-definition display, sensors, and cameras to provide workers with augmented reality overlays, real-time data visualization, and safety alerts.

- Skully AR-1 Motorcycle Helmet: Skully, a startup focused on motorcycle safety, introduced the AR-1 helmet, featuring a heads-up display (HUD), rearview camera, and smartphone connectivity. The helmet provides riders with navigation, communication, and situational awareness, enhancing safety on the road.

- Forcite Alpine Smart Helmet: Forcite, an Australian company, developed the Forcite Alpine smart helmet for snow sports enthusiasts. It incorporates features such as an integrated camera, communication system, and performance tracking sensors to enhance safety and provide an immersive experience for skiers and snowboarders.

- LifeBEAM Smart Helmet: LifeBEAM, an Israeli technology company, introduced a smart helmet designed for cyclists and outdoor enthusiasts. It features built-in heart rate monitoring, cadence sensing, and integration with fitness tracking apps, providing users with real-time health and performance data while on the move.

- Nand Logic Smart Helmet: Nand Logic, an Indian startup, developed a smart helmet for industrial workers and first responders. The helmet integrates sensors for detecting hazardous gasses, temperature, and ambient conditions, along with a communication system for sending distress signals and location information in emergencies.

- Sensory Overload Smart Helmet: Researchers at Stanford University developed a prototype smart helmet called Sensory Overload, designed for firefighters. It incorporates sensors for monitoring environmental conditions, vital signs, and thermal imaging, providing firefighters with enhanced situational awareness and safety in hazardous environments.

- Smart Construction Helmet: Several companies and research institutions have explored the development of smart helmets tailored for the construction industry. These helmets often include features such as impact detection, proximity sensors, and communication systems to improve worker safety and coordination on construction sites.

CHAPTER-6

IOT APPLICATION FOR INDUSTRIAL SAFETY

IoT applications have been instrumental in enhancing industrial safety measures, particularly in hazardous environments such as mining. The integration of IoT technology has enabled the development of responsive and reliable safety systems capable of monitoring real-time working conditions, detecting hazardous events, and alerting control centres in case of emergencies.

In the mining industry, IoT-based smart helmets have been utilized for air quality monitoring and early-warning security systems for gasses such as carbon monoxide and carbon dioxide. These smart helmets incorporate wireless mine supervising systems and sensors to provide real-time monitoring of air quality and hazardous events, contributing to the safety of industrial workers in challenging environments.

Furthermore, IoT technology has been leveraged to create smart helmets for accident detection and notification, with the capability to detect and alert in the event of accidents on roadways and industrial worksites. These applications demonstrate the versatility of IoT technology in enhancing safety measures for industrial workers, providing real-time monitoring and alerting capabilities to mitigate potential risks and improve overall safety in industrial environments.

Overall, the application of IoT technology in industrial safety has shown significant potential in addressing the specific safety concerns of workers in hazardous workplaces, contributing to the ongoing efforts to enhance safety standards in industrial environments, particularly in the mining industry.

"IoT Based Smart Helmet for Air Quality Used for the Mining Industry" "Smart Helmet for Accident Detection and Notification"

CHAPTER-7

COMPONENTS AND ARCHITECTURE

The success of the IoT-Based Smart Helmet for Industrial Workers hinges on the careful selection and integration of its components. This section provides an in-depth look at each hardware and software component and how they work together to form a cohesive system.

Detailed Component Explanation

1. Arduino UNO: The Arduino UNO serves as the central control unit of the smart helmet. Its responsibilities include data processing, decision-making, and controlling the various components. The choice of Arduino UNO was based on its versatility, ease of programming, and compatibility with a wide range of sensors.
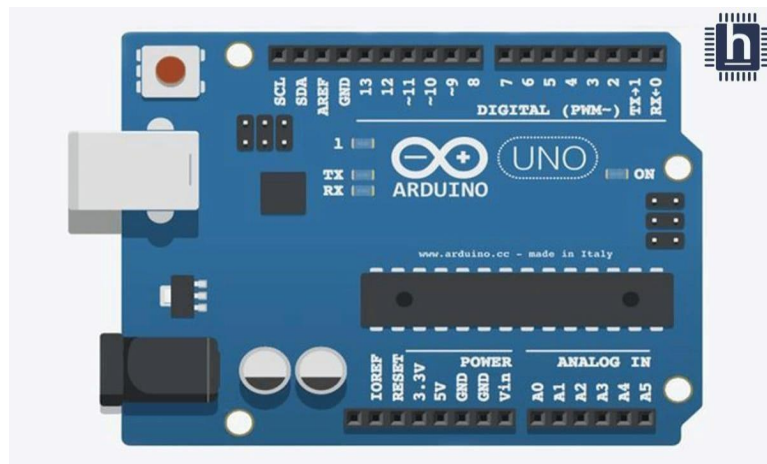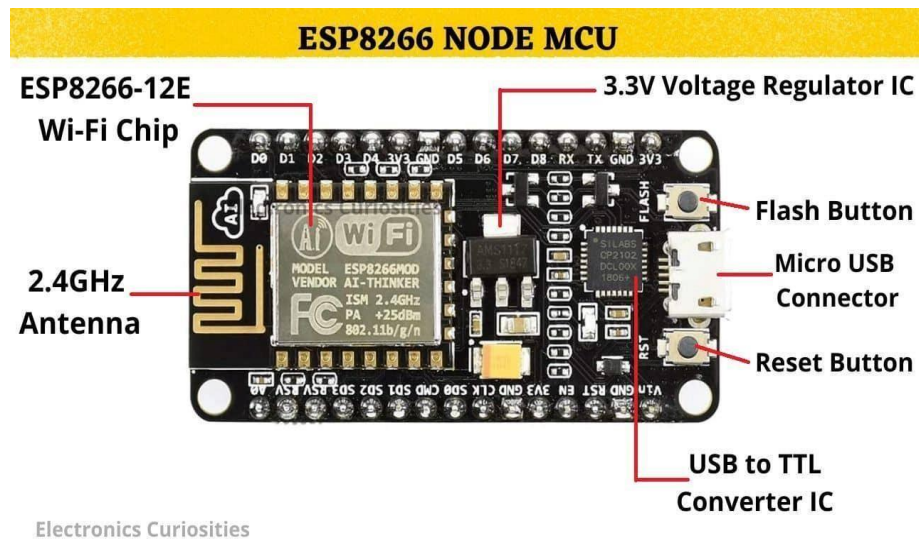

Fig 7.1: Arduino UNO

2. ESP 8266: The ESP 8266 module enables IoT connectivity, allowing the smart helmet to transmit data to the cloud for real-time monitoring. Its low power consumption and wireless capabilities make it an ideal choice for ensuring seamless communication between the helmet and the IoT platform.

Fig 7.2 ESP8266

3. Buzzer: The Buzzer serves as the audible alert system in the smart helmet. When triggered, it provides immediate audible warnings to the wearer, notifying them of potential hazards. The Buzzer is an essential component for ensuring that alerts are not only visual but also audible, contributing to a faster response in emergency situations.

Fig 7.3 Buzzer

4. Temperature Sensor (LM 35) : The temperature sensor is designed to monitor the ambient temperature in the industrial environment. It is crucial for preventing heat-related health issues among workers. The chosen temperature sensor offers high accuracy and a wide operating range, making it suitable for diverse industrial settings.
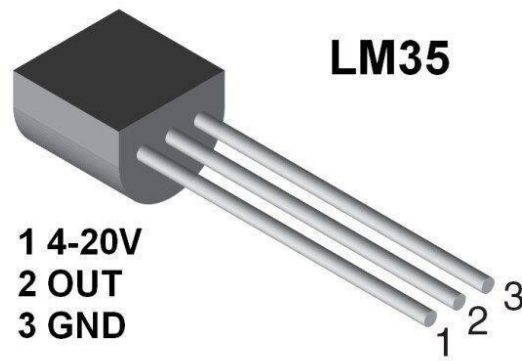
Fig 7.4 LM35

5. Gas Sensor (MQ 2): The gas sensor plays a vital role in detecting harmful gasses in the surrounding air. It ensures a safe working environment by providing immediate alerts in the presence of toxic gasses. The selected gas sensor is known for its sensitivity and specificity to a range of industrial gasses.
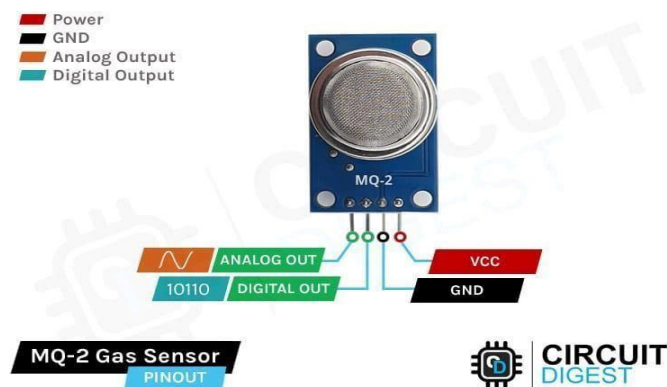

Fig 7.5 Gas Sensor

6. Radiation Sensor: Constant monitoring of radiation levels is essential in environments where workers may be exposed to radiation. The radiation sensor selected for the smart helmet offers precise measurements and quick response times, ensuring the safety of workers in such environments.

7. Humidity Sensor: The humidity sensor is responsible for maintaining optimal working conditions by monitoring and controlling humidity levels. It is crucial for preventing conditions that could adversely affect both workers and equipment. The chosen humidity sensor offers reliability and accuracy in varied humidity environments.
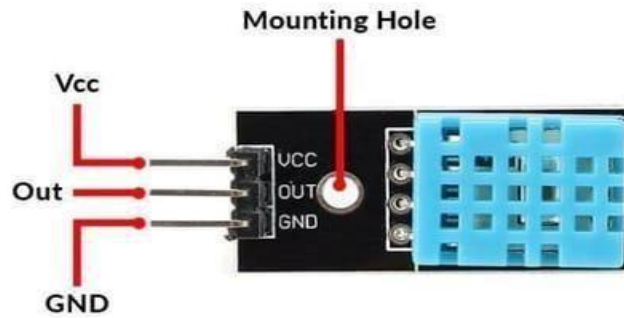
Fig 7.6 Humidity sensor

8. Fall/Crash Sensor: The fall/crash sensor is a crucial component designed to detect sudden falls or impacts, triggering immediate alerts to enable a swift response in case of accidents. It is engineered to be highly sensitive and reliable, ensuring accurate detection while minimizing unnecessary false alarms.
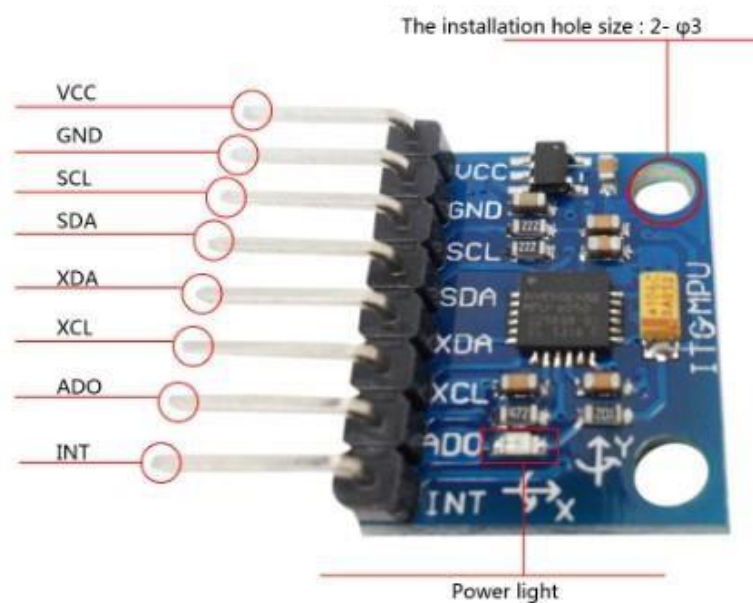

Fig 7.7 Fall/Crash Sensor

a. **VCC:** This pin supplies power to the sensor, typically requiring a voltage level of 3.3V or 5V.
b. **GND:** This pin serves as the ground reference for the sensor, completing the electrical circuit.
c. **SCL:** This pin facilitates clock signal transmission, synchronizing data transfer between the sensor and the microcontroller.
d. **SDA:** This pin enables bidirectional data communication between the sensor and the microcontroller.
e. **XOUT/YOUT/ZOUT:** These pins provide analog voltage outputs representing the acceleration along the X, Y, and Z axes, respectively.

19

f.   **INT:** This interrupt pin signals the microcontroller when new sensor data is available.

g.   **AD0/ADO:** This pin configures the sensor's I2C address, allowing multiple sensors to be connected on the same bus.

CHAPTER-8

CIRCUIT DIAGRAM

To better understand how these components work together, the project includes detailed schematic diagrams illustrating the architecture of the smart helmet system. These diagrams show the interconnection between the Arduino UNO, sensors, ESP 8266, and the Buzzer. Each component's role in the overall system is clearly depicted, providing a visual representation of the smart helmet's functionality.
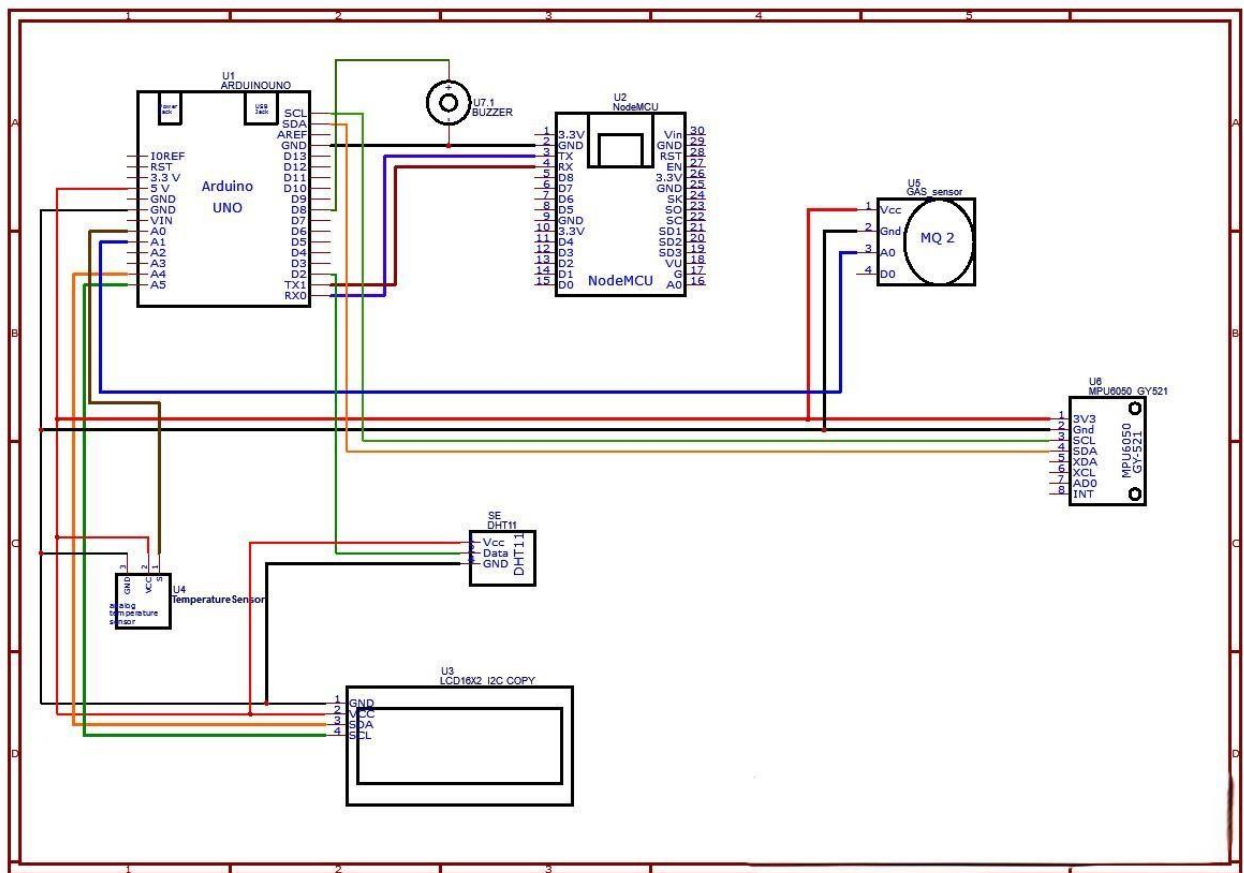

Figure 8.1 Circuit Diagram

21

CHAPTER-9

SYSTEM DESIGN

The system design is a critical phase in the development of the IoT-Based Smart Helmet for Industrial Workers. This section delves into the technical details of how the various components are organized and function together, ensuring a cohesive and efficient system.

9.1 Technical Details:

Architecture Overview: The system architecture comprises the Arduino UNO as the central processing unit, connected to sensors, the ESP 8266 module, and the Buzzer. The architecture is designed to facilitate seamless communication and data flow between components, ensuring a swift response to potential hazards.

Sensor Integration: Each sensor is strategically placed on the smart helmet to optimize data collection. The temperature sensor is positioned to measure ambient temperature accurately, while the gas, radiation, and humidity sensors are strategically placed for effective environmental monitoring. The fall/crash sensor is integrated to detect sudden impacts, and the pulse sensor is positioned for continuous health monitoring.

Communication Channels: The communication between the Arduino UNO, sensors, and the ESP 8266 module is orchestrated through carefully designed channels. The Arduino UNO processes data from the sensors and instructs the ESP 8266 for IoT communication. The Buzzer is triggered based on predefined conditions, ensuring timely alerts to the wearer.

Power Management: Efficient power management is crucial for the smart helmet's functionality. The Arduino UNO and sensors are powered by a compact and rechargeable battery pack, providing a balance between power capacity and weight. Power consumption is optimized to ensure extended usage periods between recharges.

Integration Challenges: During the system design phase, challenges such as optimizing power consumption, minimizing interference between sensors, and ensuring real-time data processing were addressed. The design emphasizes efficiency and reliability, taking into account the dynamic nature of industrial environments.

Justification for Component Choice

1. **Arduino UNO:** The Arduino UNO was chosen for its versatility, ease of programming, and extensive community support. Its compatibility with various sensors and shields makes it a robust choice for the central control unit of the smart helmet.
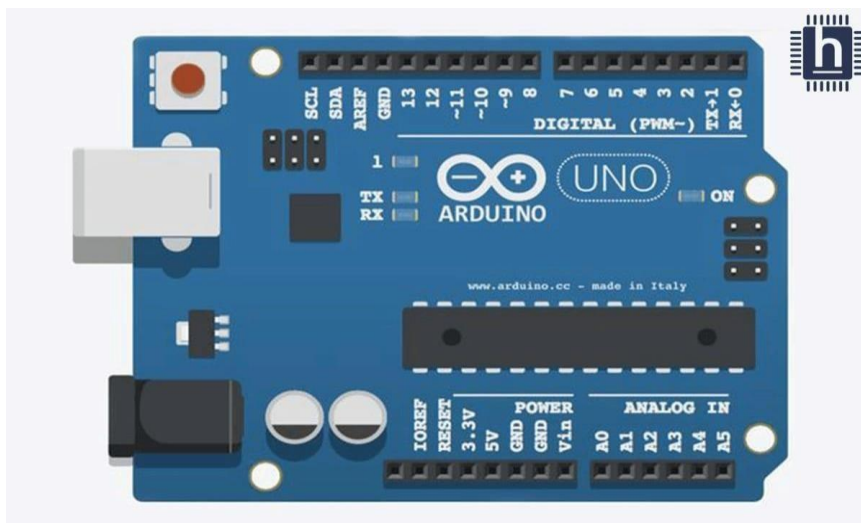

Fig 9.1: Arduino UNO

2. **ESP 8266:** The ESP 8266 was selected for its low power consumption, wireless capabilities, and seamless integration with the Arduino UNO. Its ability to connect to the IoT platform ensures real-time monitoring and remote access.
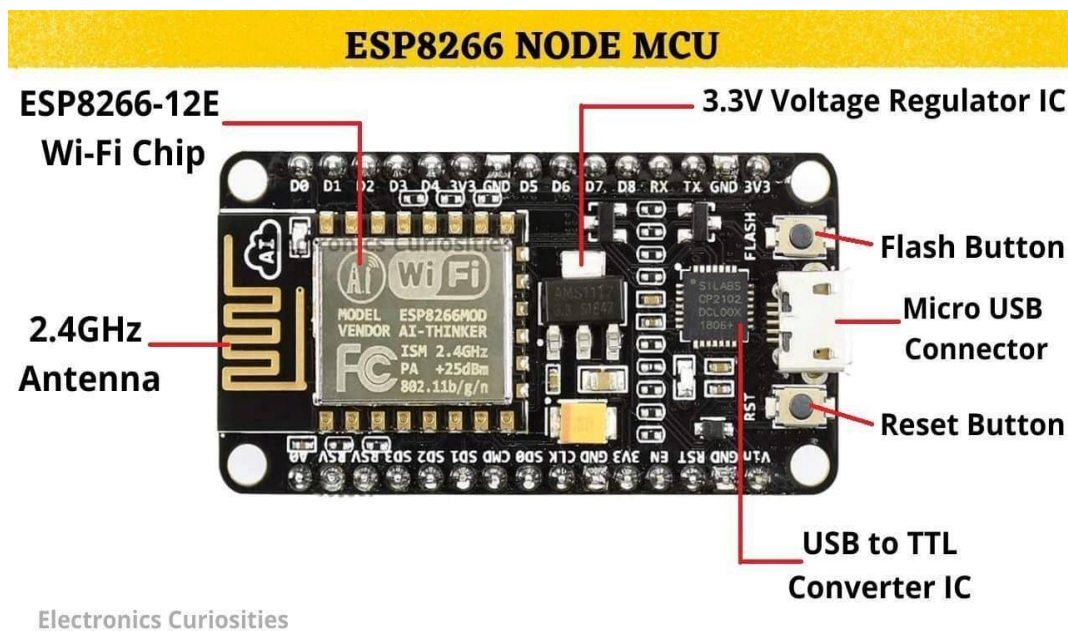
Fig 9.2 ESP8266

3. Buzzer: The Buzzer was chosen as the audible alert system due to its simplicity, effectiveness, and immediate impact. Its integration provides an additional layer of safety, ensuring that workers receive timely alerts even in noisy industrial environments.
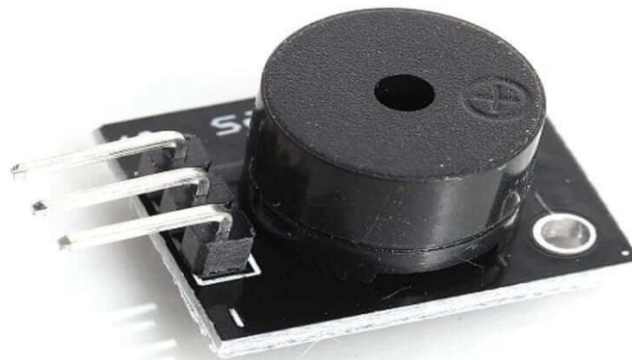

Fig 9.3 Buzzer

4. **Sensors:** Each sensor was carefully chosen based on its accuracy, sensitivity, and suitability for industrial applications. The temperature sensor ensures worker comfort, gas and radiation sensors detect potential hazards, the humidity sensor maintains optimal conditions, and the fall/crash and pulse sensors contribute to worker safety and health monitoring.

•   **LM35:** The LM35 sensor, employed in the project, is a temperature sensor known for its precision and ease of use. It provides a linear output voltage directly proportional to the Celsius temperature, making it convenient for temperature monitoring. The sensor's output voltage increases by 10 mV for every degree Celsius rise in temperature, facilitating straightforward temperature readings. With its wide operating range and accuracy, the LM35 proves to be a valuable component for real-time temperature monitoring in the smart helmet, ensuring worker comfort and preventing heat-related health risks.
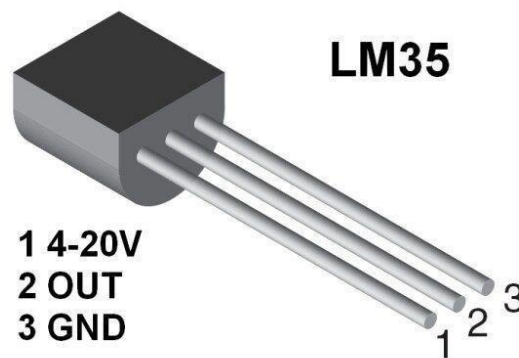

Fig 9.4 LM35

•   **MQ-2:** MQ-2 Gas Sensor: The MQ-2 gas sensor is a crucial component responsible for detecting the presence of harmful gasses in the industrial environment. It is specifically designed to be sensitive to a range of gasses, including LPG, smoke, alcohol, propane, hydrogen, methane, and carbon monoxide, which are commonly found in industrial settings. The sensor's ability to detect multiple gasses makes it versatile and effective in ensuring a safe working atmosphere. By continuously monitoring the air for these potential hazards, the MQ-2 gas sensor provides early warnings, allowing workers and safety personnel to take appropriate actions to prevent accidents and protect lives.
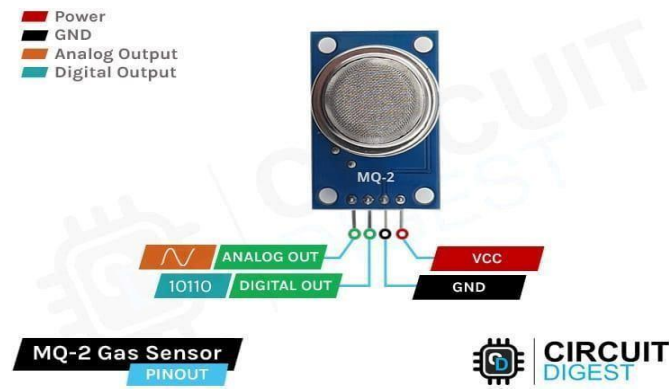
Fig 9.5 Gas Sensor

• **MPU 6050:** MPU-6050 Fall/Crash Sensor: The MPU-6050 sensor, utilized in the project, incorporates a 3-axis accelerometer and a 3-axis gyroscope, enabling it to detect sudden changes in acceleration and angular velocity, which are characteristic of falls or crashes. By continuously monitoring these parameters, the sensor can accurately identify fall events and trigger corresponding alerts, enhancing worker safety. The sensor's high sensitivity and precision make it well-suited for detecting falls from various heights and angles, providing reliable protection in dynamic industrial environments.
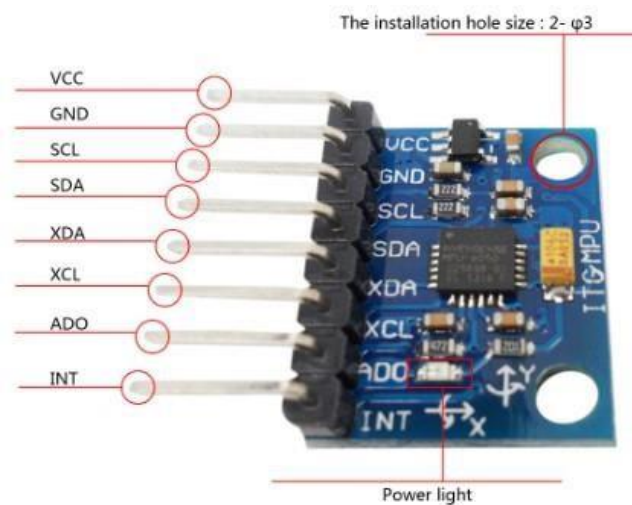
Fig 9.6 Fall/Crash Sensor

• **DHT 11:** DHT11 Humidity Sensor: The DHT11 sensor is a basic, low-cost digital humidity and temperature sensor. It uses a capacitive humidity sensor and a negative temperature coefficient thermistor to measure the surrounding air's relative humidity and temperature. The sensor provides a digital output, making it easy to interface with microcontrollers like the Arduino UNO used in the smart helmet. By monitoring humidity levels, the DHT11 sensor helps maintain a comfortable and safe working environment, preventing issues related to excessive or insufficient humidity.

26

Fig 9.7 Humidity sensor

Prototyping and Testing

Prototyping: The development of the Smart Industrial Helmet involved multiple stages of prototyping to ensure the functionality and reliability of the system. The initial proto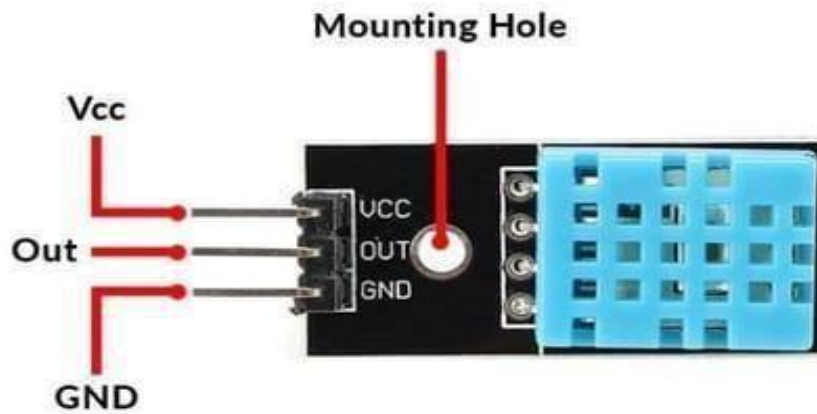type focused on integrating the various sensors and components, including the DHT11 temperature and humidity sensor, MQ2 gas sensor, MPU6050 accelerometer and gyroscope, and the NodeMCU ESP8266 module for wireless communication. Each component was individually tested and calibrated before being integrated into the helmet.

The microcontroller used for this project is the Arduino Uno, which interfaces with the sensors and processes the data. The helmet also features an I2C LCD display for real-time data visualization and LEDs to indicate system status. The sensors were strategically placed to capture accurate readings while ensuring user comfort and safety. The wiring and connections were carefully managed to avoid interference and ensure reliable data transmission.

Testing: Testing was conducted in two main phases: bench testing and field testing.

1. **Bench Testing:**

- **Sensor Accuracy:** Each sensor was tested to verify its accuracy and response time. The DHT11 sensor was calibrated against a standard thermometer and hygrometer, the MQ2 sensor was tested with controlled gas exposures, and the MPU6050 was tested for accurate motion detection.

- **Data Transmission:** The NodeMCU ESP8266 module was tested to ensure reliable data transmission to the ThingSpeak server. This involved verifying the Wi-Fi connection stability and data integrity during transmission.
- **Component Integration:** The integration of sensors, display, and indicators (LEDs and buzzer) was tested to ensure they work seamlessly together. The LCD was tested for proper display of temperature, humidity, and gas levels, while LEDs and buzzer were tested for appropriate alerting based on sensor thresholds.

2. **Field Testing:**

- **Environmental Testing:** The helmet was tested in different environmental conditions to ensure accurate sensor readings and system performance. This included testing in varying temperatures, humidity levels, and gas concentrations.
- **User Testing:** The helmet was worn by volunteers to test its comfort and functionality in a realworld industrial environment. Feedback was gathered on the ergonomic design, ease of use, and overall effectiveness of the alerts.
- **Fall Detection:** The MPU6050 sensor was specifically tested for fall detection by simulating falls and sudden movements. The accuracy of the fall detection algorithm was assessed and fine-tuned based on these tests.

Results and Iterations: Initial testing revealed areas for improvement, such as sensor placement for optimal accuracy and fine-tuning the thresholds for alerts. Iterative testing and prototyping led to refinements in the hardware design and software algorithms, resulting in a reliable and user-friendly smart helmet. The final prototype demonstrated consistent performance in monitoring environmental conditions and worker safety, with successful data transmission to the cloud for remote monitoring and analysis.

Key iterations included:

- **Sensor Calibration:** Adjustments were made to improve the accuracy of temperature and humidity readings, and to ensure the gas sensor responded appropriately to various concentrations of gas.
- **Algorithm Enhancement:** The fall detection algorithm was refined to reduce false positives and ensure reliable detection of genuine falls. This involved adjusting sensitivity settings and incorporating additional motion analysis.

- **Power Management:** Improvements were made to the power management system to extend battery life, including optimizing sensor polling intervals and utilizing low-power modes where possible.

- **User Interface:** The LCD display and alert system were enhanced based on user feedback. This included improving the readability of the display in different lighting conditions and ensuring that alert signals (LEDs and buzzer) were sufficiently noticeable without being disruptive.

- **Data Transmission Reliability:** Enhancements to the Wi-Fi module's firmware and errorhandling routines improved the reliability of data transmission to the ThingSpeak server, ensuring consistent and timely updates.

The final prototype demonstrated consistent performance in monitoring environmental conditions and worker safety, with successful data transmission to the cloud for remote monitoring and analysis. This comprehensive testing and iteration process ensured that the Smart Industrial Helmet met its design objectives, providing a robust and effective solution for enhancing worker safety in industrial environments.

Fig 9.8 Smart Helmet

CHAPTER-10

IMPLEMENTATION

The implementation phase is a crucial step in transforming the conceptual design of the IoT-based smart Helmet into a functional and practical reality. This section provides a detailed walkthrough of how the smart helmet was constructed, programmed, and integrated, emphasizing key technical aspects.

Step-by-Step Explanation

1. **Component Assembly**: The assembly process involves physically integrating the selected components onto the helmet. Careful consideration is given to the placement of sensors to ensure accurate readings and the comfort of the wearer. The Arduino UNO, ESP 8266 module, and the Buzzer are securely mounted, and wiring is organized to minimize interference and ensure durability.

2. **Wiring and Interconnection:** Wiring is a critical aspect of the implementation phase. Each sensor is connected to the Arduino UNO according to the predefined pin configurations. The ESP 8266 module is interfaced with the Arduino, establishing a communication channel for IoT connectivity. The Buzzer is wired to the Arduino to trigger audible alerts based on programmed conditions.

3. **Power Supply Integration:** A compact and rechargeable battery pack is integrated into the smart helmet to power the Arduino UNO and sensors. The power supply is designed for optimal weight distribution and extended usage periods. Efficient power management is implemented to maximize the operational time between recharges.

4. **Programming the Arduino UNO:** The Arduino UNO is programmed using the Arduino Integrated Development Environment (IDE). The code includes algorithms for data acquisition from sensors, decision-making logic, communication with the IoT platform via the ESP 8266, and the activation of the Buzzer under predefined conditions. The programming ensures seamless integration and functionality of the entire system.

5. **IoT Platform Configuration:** The IoT platform is configured to receive data transmitted by the ESP 8266. Security measures, including encryption and authentication protocols, are implemented to safeguard data during transmission. The platform is set up to store and organize the received data for real-time monitoring and historical analysis.

Challenges and Solutions:

1. **Power Consumption Optimization:** One challenge encountered during implementation was optimizing power consumption to extend the smart helmet's operational time. The Arduino UNO was programmed to enter a low-power mode during idle periods, and sensors were calibrated to operate efficiently without compromising accuracy. This approach significantly improved power efficiency.

2. **Interference Between Sensors:** Interference between sensors posed another challenge, particularly in close proximity. To mitigate this issue, shielding and positioning adjustments were implemented. The physical layout of sensors was optimized to minimize cross-talk and ensure accurate individual sensor readings.

3. **Real-Time Data Processing:** Achieving real-time data processing and transmission was a priority. The implementation involved optimizing the code for efficient data processing and leveraging the capabilities of the ESP 8266 module. Thorough testing was conducted to validate the system's ability to provide timely alerts and real-time monitoring.

Testing Methodologies:

1. **Simulation of Industrial Scenarios:** The smart helmet underwent testing in simulated industrial scenarios to evaluate its performance in diverse environments. This involved exposing the helmet to varying temperatures, gas concentrations, radiation levels, and humidity conditions. The fall/crash sensor and pulse sensor were tested in controlled scenarios to ensure accurate detection and monitoring.

2. **User Interaction Testing:** User interaction testing involved assessing how workers interacted with the smart helmet in real-world conditions. Feedback from wearers was collected to evaluate the comfort, usability, and overall user experience. This testing phase aimed to identify any practical challenges that users might face during regular use.

3. **Data Accuracy Validation:** The accuracy of sensor readings and the reliability of the entire system were validated through meticulous testing. Data collected by the smart helmet

were compared with known environmental conditions to ensure that the sensors provided precise readings. Calibration adjustments were made as necessary to enhance accuracy.

Sensor Functions and Calibration

The success of the IoT-Based Smart Helmet for Industrial Workers relies on the accurate and reliable functioning of its various sensors. This section provides a detailed exploration of each sensor's role, the specific environmental parameters it monitors, and the calibration procedures employed to ensure precise reading.

Temperature Sensor:

1. **Role and Placement:** The temperature sensor is strategically placed on the smart helmet to monitor ambient temperature. Its primary role is to ensure that workers are operating in a comfortable temperature range, preventing heat-related health issues. The sensor is positioned for optimal exposure to the surrounding air while avoiding direct heat sources.

2. **Calibration:** Calibration of the temperature sensor is essential to provide accurate readings. Calibration involves comparing the sensor's output with a known reference temperature and adjusting the sensor's readings accordingly. This process is conducted during the manufacturing phase and may be periodically verified during the helmet's operational life to account for any drift or changes in sensor performance.

Gas sensor:

1. **Role and Placement**: The gas sensor is a critical component designed to detect the presence of harmful gasses in the industrial environment. It continuously monitors the air for potential hazards, ensuring a safe working atmosphere. The sensor is strategically placed to capture air samples effectively, and its placement avoids areas of stagnant air.

2. **Calibration:** Calibrating the gas sensor involves exposing it to known concentrations of specific gasses to establish a baseline for accurate measurements. During the calibration process, the sensor's response to various gas concentrations is recorded, and adjustments are made to the sensor's output. Periodic recalibration may be necessary to account for changes in sensor sensitivity over time.

Radiation Sensor:

1. **Role and Placement:** The radiation sensor is dedicated to monitoring radiation levels in the surrounding environment. It plays a crucial role in preventing unnecessary exposure to harmful radiation for industrial workers. The sensor is positioned to capture radiation from the surroundings without interference from other components or materials.

2. **Calibration:** Calibrating the radiation sensor involves exposing it to a controlled radiation source to establish a reference point for measurements. The sensor's response to different radiation levels is recorded, and adjustments are made to ensure accurate readings. Regular calibration checks are conducted to maintain the sensor's accuracy over time.

Humidity Sensor

1. **Role and Placement:** The humidity sensor is responsible for monitoring and controlling humidity levels in the working environment. Maintaining optimal humidity is essential for worker comfort and the prevention of conditions that could adversely affect both workers and equipment. The sensor is strategically placed to capture accurate humidity readings.

2. **Calibration:** Calibrating the humidity sensor involves exposing it to known humidity levels and adjusting its readings accordingly. The calibration process ensures that the sensor provides accurate measurements across a range of humidity conditions. Periodic recalibration checks may be conducted to account for any drift in sensor performance.

Fall/Crash Sensor:

1. **Role and Placement:** The fall/crash sensor is a crucial component designed to detect sudden falls or impacts experienced by the wearer. Its role is to trigger immediate alerts in the event of an accident, enabling a swift response from both the worker and the monitoring system. The sensor is securely integrated into the helmet to detect changes in acceleration.

2. **Calibration:** Calibrating the fall/crash sensor involves setting threshold values for acceleration that indicate a fall or impact. The sensor is tested with controlled falls or impacts to determine the threshold levels for triggering alerts. Calibration ensures that the sensor responds accurately to relevant events while minimizing false alarms.

Pulse Sensor:

1. **Role and Placement:** The pulse sensor is dedicated to real-time monitoring of the wearer's heart rate. Its role is to provide continuous insights into the worker's health, enabling early detection of any abnormal conditions. The sensor is strategically placed for optimal contact with the wearer's skin without causing discomfort.

2. **Calibration:** Calibrating the pulse sensor involves establishing a baseline for the wearer's normal heart rate. The sensor is tested against manually measured heart rates to ensure accuracy. Calibration is conducted during the manufacturing phase, and periodic checks may be performed to account for any changes in sensor performance each sensor in the smart helmet plays a specific role in monitoring environmental conditions and ensuring the wearer's safety. Calibration procedures are implemented to guarantee accurate sensor readings, and periodic checks may be conducted to maintain calibration accuracy over time. The next section will elaborate on the working principle of the IoT-Based Smart Helmet, highlighting how these sensors collectively contribute to the safety of industrial workers.
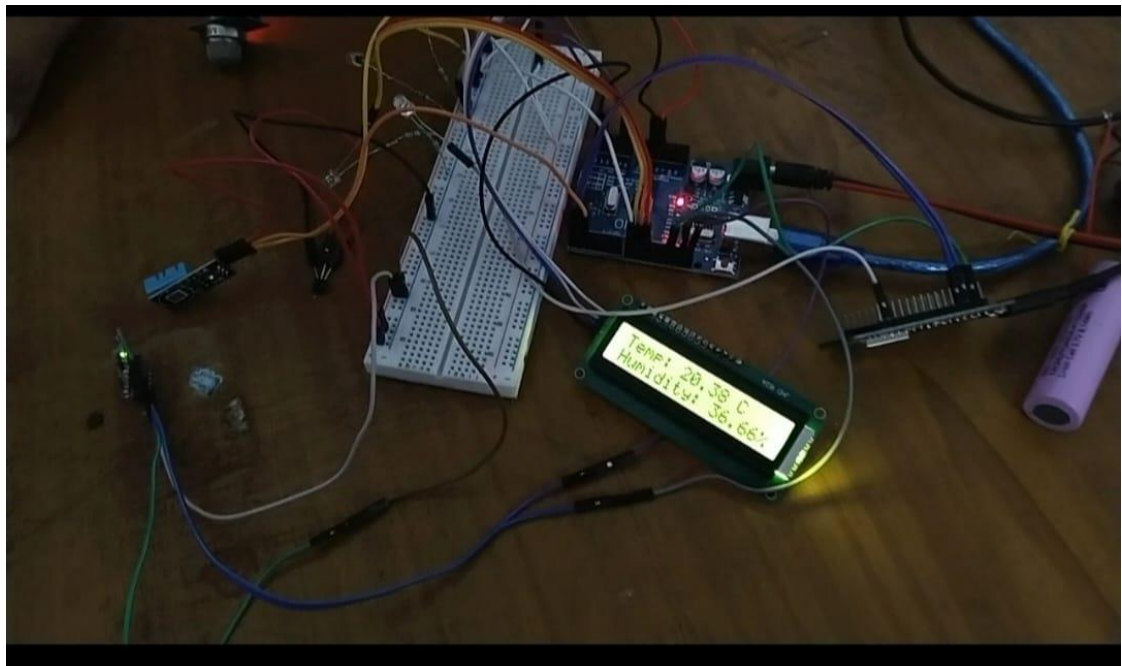

Fig 10.1 Testing Prototype

IoT Integration and Cloud Connectivity:

The IoT-Based Smart Helmet for Industrial Workers leverages IoT technology to provide real-time monitoring, data storage, and remote accessibility. This section details how the system integrates with the Internet of Things (IoT) and establishes connectivity with a cloud platform for efficient data management.

Connection to IoT Platform:

1.   Role of IoT in Smart Helmet: The integration of IoT technology enhances the smart helmet's capabilities by enabling seamless communication between the helmet and a designated cloud-based platform. The IoT platform serves as a centralized hub for receiving, storing, and analyzing data transmitted by the helmet's sensors. This connectivity introduces a new dimension to safety monitoring, allowing for real-time insights and remote access.

2.   ESP 8266 Module: The ESP 8266 module acts as the communication bridge between the smart helmet and the IoT platform. It facilitates the wireless transmission of data from the Arduino UNO to the cloud. The module is programmed to establish a secure connection, ensuring the confidentiality and integrity of the transmitted data.

Cloud Platform Configuration:

For the Smart Industrial Helmet project, the ThingSpeak cloud platform was selected due to its robust features tailored for IoT applications, ease of use, and compatibility with the hardware components used in this project. ThingSpeak provides a reliable and efficient platform for collecting, analyzing, and visualizing data from IoT devices. Its integration with MATLAB further enhances its capabilities for advanced data analysis and processing.
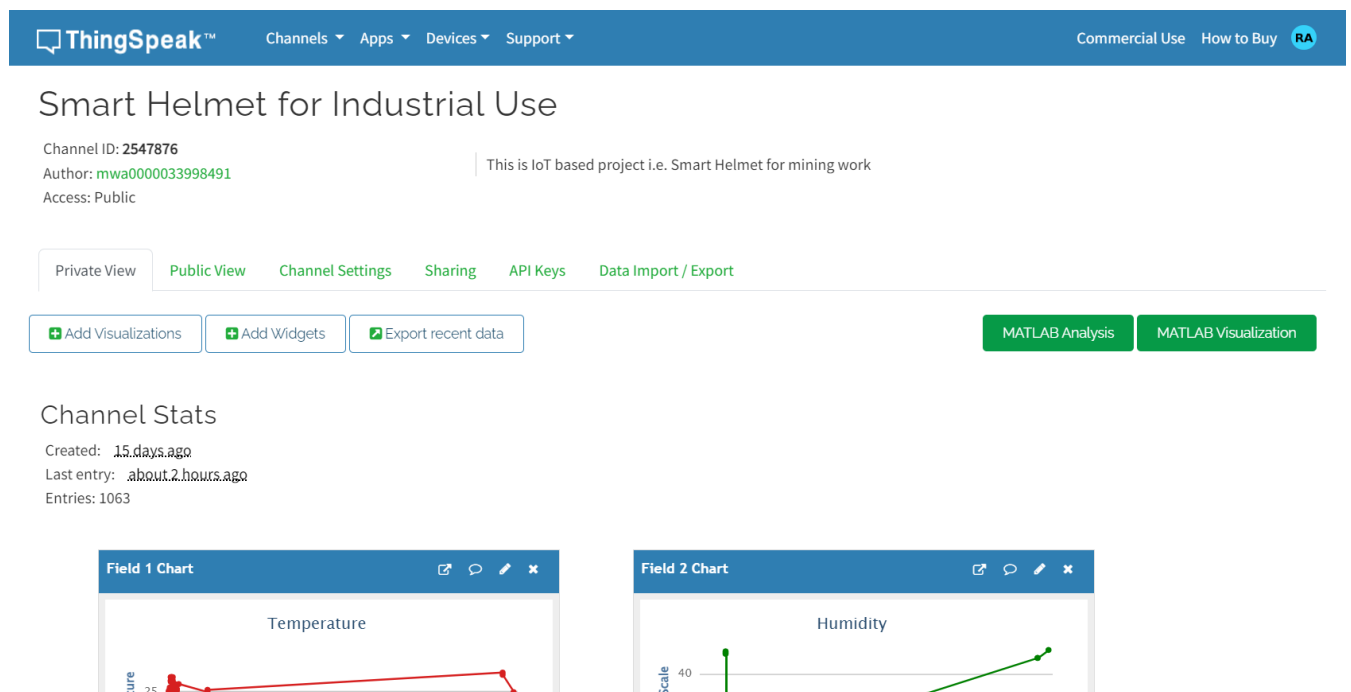

Fig 10.2 ThingSpeak Server

Key Features of ThingSpeak:

1. **Real-Time Data Collection:** ThingSpeak allows for real-time data collection from various sensors integrated into the Smart Industrial Helmet. This feature is crucial for monitoring environmental conditions and worker safety continuously.

2. **Data Visualization:** ThingSpeak offers built-in tools for visualizing data in graphs and charts, providing an intuitive way to monitor temperature, humidity, gas levels, and fall detection alerts. This visualization aids in quick decision-making and analysis.

3. **APIs for Easy Integration:** ThingSpeak provides APIs that facilitate easy integration with hardware like the Arduino Uno and NodeMCU ESP8266. These APIs support HTTP and MQTT protocols, ensuring seamless communication between the helmet and the cloud server.
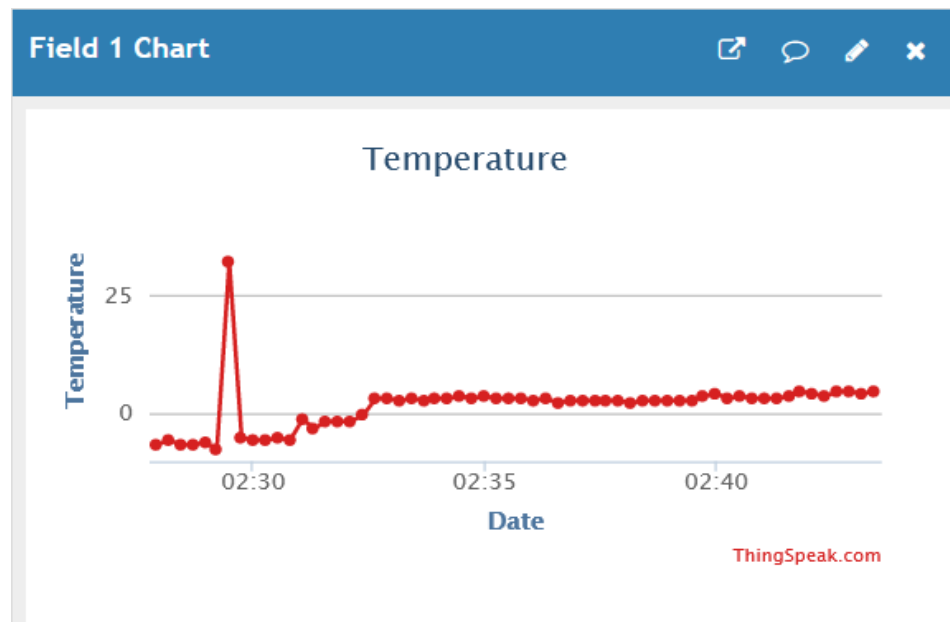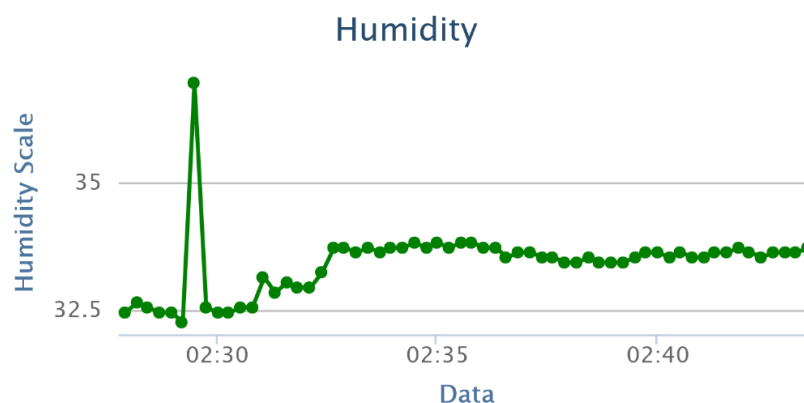

Fig 10.3 Temperature Data on ThingSpeak Server

Fig 10.4 Humidity Data on ThingSpeak Server

Fall Sensor
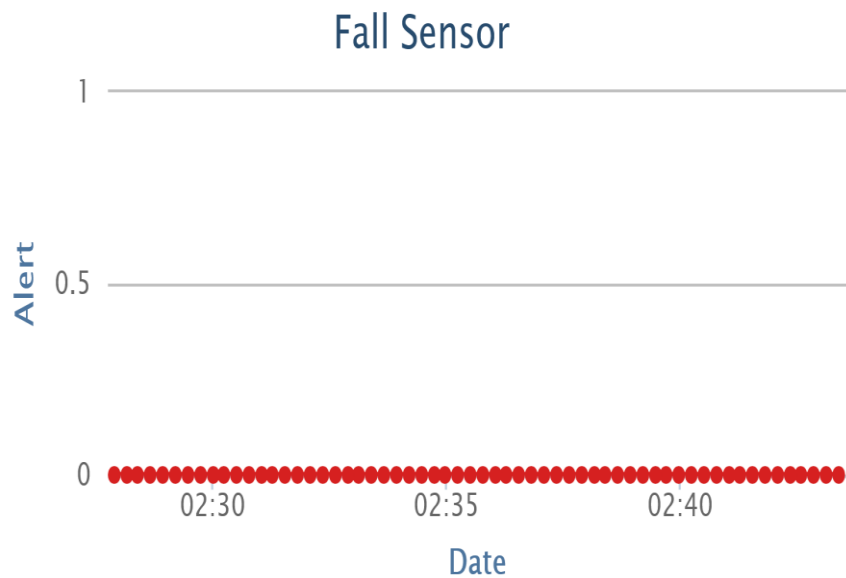
Fig 10.5 Fall/Crash Data on ThingSpeak Server
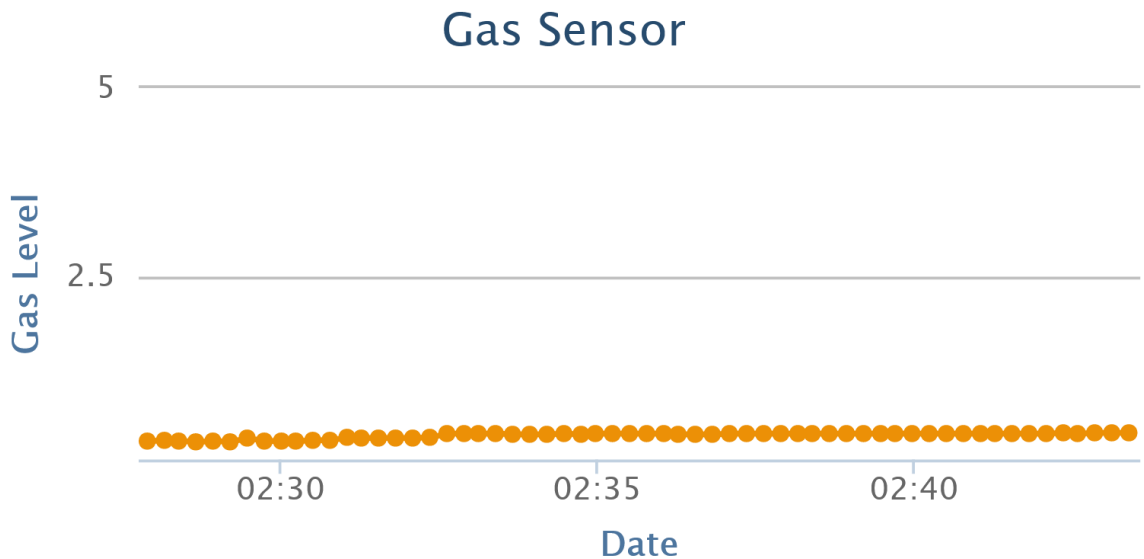
Gas Sensor

Fig 10.6 Gas Sensor Data on Server Data

4.   **Data Storage and Retrieval:** ThingSpeak offers reliable data storage solutions, ensuring that all the sensor data is securely stored and can be retrieved for historical analysis and reporting.

Integration with Smart Industrial Helmet:

The integration process involved several steps to ensure seamless communication between the Smart Industrial Helmet and the ThingSpeak cloud platform:

1. **Configuring the NodeMCU ESP8266:**

    i.   The NodeMCU ESP8266 module was programmed to connect to the local Wi-Fi network using the provided SSID and password. ii. Once connected to the internet, the NodeMCU was configured to communicate with the ThingSpeak server using HTTP POST requests to send sensor data.

2. **Sending Data to ThingSpeak:**

    i.   The Arduino Uno collects data from the DHT11 temperature and humidity sensor, MQ2 gas sensor, and MPU6050 accelerometer. ii. The collected data is formatted into a string and sent to the NodeMCU via serial communication. iii. The NodeMCU then constructs an HTTP POST request containing the data and sends it to the ThingSpeak API endpoint using the Write API Key for authentication.

3. **Processing and Visualizing Data:**

    i. ThingSpeak receives the data and stores it in designated fields within a channel created specifically for this project. ii. The platform's visualization tools are used to create real-time graphs and charts, displaying temperature, humidity, gas levels, and fall detection status.

4. Real-Time Monitoring and Alerts

Dashboard Interface: The cloud platform typically provides a user-friendly dashboard interface for real-time monitoring. This interface displays live data from the smart helmet's sensors, allowing supervisors or safety officers to track environmental conditions and the wearer's health status remotely.

Immediate Alerts: In the event of sensor-triggered alerts, the cloud platform can generate immediate notifications. Alerts are transmitted to designated personnel through email, SMS, or push notifications, ensuring that potential hazards are addressed promptly. This feature enhances the responsiveness of safety measures.

Historical Data Analysis

Data Logging: The cloud platform logs and archives historical data received from the smart helmet. This data logging enables the analysis of trends, patterns, and anomalies over time. It contributes to a comprehensive understanding of environmental conditions and worker health, facilitating continuous improvement in safety protocols.

Machine Learning Integration (Future Enhancement): As a future enhancement, machine learning algorithms may be integrated into the cloud platform for predictive analysis. By analyzing historical data, these algorithms can identify patterns that precede safety incidents or health issues. This proactive approach enhances the smart helmet's capability to prevent potential risks.

The choice of ThingSpeak as the cloud platform for the Smart Industrial Helmet project provided a robust, reliable, and easy-to-integrate solution for real-time data collection, analysis, and visualization. The seamless integration process ensured that the helmet could effectively monitor environmental conditions and worker safety, providing timely alerts and comprehensive data analysis for improved decision-making.

ANNEXURE

Code of Arduino UNO:

```cpp
#include <Wire.h>
#include <LiquidCrystal_I2C.h>
#include <MPU6050.h>

#define TEMPERATURE_PIN A0
#define GAS_PIN A1
#define HUMIDITY_PIN 2
//#define DHT_PIN 2
//#define DHT_TYPE DHT11
#define BUZZER_PIN 8
#define TEMP_LED_PIN 9
#define DATA_LED_PIN 10
#define GAS_LED_PIN 11

LiquidCrystal_I2C lcd(0x27, 16, 2);  // Set the LCD address to 0x27 for a 16 chars and 2 line display
MPU6050 mpu;
//DHT dht(DHT_PIN, DHT_TYPE);

int16_t ax, ay, az;
int16_t gx, gy, gz;

void setup() {
  Serial.begin(9600);
  lcd.init();  // Initialize the LCD
  lcd.backlight(); // Turn on the backlight
  lcd.begin(16, 2); // Specify the number of columns and rows
  pinMode(BUZZER_PIN, OUTPUT);
  pinMode(TEMP_LED_PIN, OUTPUT);
  pinMode(DATA_LED_PIN, OUTPUT);
  pinMode(GAS_LED_PIN, OUTPUT);
  digitalWrite(TEMP_LED_PIN, LOW);
  digitalWrite(DATA_LED_PIN, LOW);
  digitalWrite(GAS_LED_PIN, LOW);

  Wire.begin();
  mpu.initialize();
  if (mpu.testConnection()) {
    Serial.println("MPU6050 Connection successful");
  } else {
    Serial.println("MPU Connection failed");
  }
}

void loop() {
  float temperature = getTemperature();
  float humidity = getHumidity();
  float gas = getGas();
  bool fallDetected = checkForFall();

  // Format the data string in the required format
```

```cpp
  String  data  =  "field1="  +  String(temperature)  +  "&field2="  +  String(humidity)  +  "&field3="  +
String(gas) + "&field4=" + String(fallDetected ? "1" : "0");

  // Send sensor data over serial to NodeMCU
  Serial.println(data);

  // Indicate data transmission
  digitalWrite(DATA_LED_PIN, HIGH);
  delay(100);
  digitalWrite(DATA_LED_PIN, LOW);

  lcd.clear();
  lcd.setCursor(0, 0);
  lcd.print("Temp: ");
  lcd.print(temperature);
  lcd.print(" C");

  lcd.setCursor(0, 1);
  lcd.print("Humidity: ");
  lcd.print(humidity);
  lcd.print("%");

  if (gas > 5) {
    digitalWrite(BUZZER_PIN, HIGH);
    digitalWrite(GAS_LED_PIN, HIGH);
    lcd.setCursor(0, 1);
    lcd.print("Warning: Gas!");
  } else {
    digitalWrite(BUZZER_PIN, LOW);
    digitalWrite(GAS_LED_PIN, LOW);
  }

  delay(1000);

  // Temperature check
  if (temperature > 40) {
    digitalWrite(BUZZER_PIN, HIGH);
    digitalWrite(TEMP_LED_PIN, HIGH);
    lcd.setCursor(0, 1);
    lcd.print("Warning: Temperature!");
  } else {
    digitalWrite(BUZZER_PIN, LOW);
    digitalWrite(TEMP_LED_PIN, LOW);
  }

  delay(1000);

  // Fall Detection
  if (fallDetected) {
    lcd.clear();
    lcd.setCursor(0, 0);
    lcd.print("Warning: Fall!");
    digitalWrite(BUZZER_PIN, HIGH);
  }
```

```
  delay(1000);
}

float getTemperature() {
  int sensorValue = analogRead(TEMPERATURE_PIN);
  float voltage = sensorValue * (5.0 / 1023.0);
  float temperatureC = (voltage - 0.5) * 100;
  return temperatureC;
}

float getHumidity() {
  int sensorValue = analogRead(HUMIDITY_PIN);
  float voltage = sensorValue * (5.0 / 1023.0);
  float humidity = voltage * 100 / 5; // Assuming humidity sensor outputs 0-5V
  return humidity;
}

float getGas() {
  int sensorValue = analogRead(GAS_PIN);
  float voltage = sensorValue * (5.0 / 1023.0);
  return voltage;
}

bool checkForFall() {
  mpu.getMotion6(&ax, &ay, &az, &gx, &gy, &gz);
  int threshold = 25000; // change according to your use case
  if (abs(ax) > threshold || abs(ay) > threshold || abs(az) > threshold) {
    return true;
  }
  return false;
}
```

Code of NodeMCU ESP 8266:

```
#include <ESP8266WiFi.h>
#include <WiFiClient.h>
#include <ESP8266HTTPClient.h>

const char* ssid = "vivo_T1";
const char* password = "22222222";
const char* server = "api.thingspeak.com";
const String apiKey = "yourApiKey";

WiFiClient client;

void setup() {
  Serial.begin(9600);
  delay(1000);

  WiFi.begin(ssid, password);
  Serial.println("Connecting to WiFi...");
  pinMode(D1, OUTPUT); // Blue LED pin for data transmission status
  digitalWrite(D1, LOW); // Ensure LED is off initially
```

```
  while (WiFi.status() != WL_CONNECTED) {
    delay(1000);
    Serial.println("Connecting...");
  }

  Serial.println("Connected to WiFi");
  digitalWrite(D1, HIGH); // Turn on Green LED when connected (can be the existing Wi-Fi LED)
}

void loop() {
  if (Serial.available() > 0) {
    String data = Serial.readStringUntil('\n');
    sendDataToThingSpeak(data);
  }
}

void sendDataToThingSpeak(String data) {

  Serial.println("Data to be sent: ");
  Serial.println(data);

  if (client.connect(server, 80)) {

    // testing
    Serial.println("Sending HTTP request:");
    Serial.print("POST /update HTTP/1.1\n");
    Serial.print("Host: api.thingspeak.com\n");
    Serial.print("Connection: close\n");
    Serial.print("X-THINGSPEAKAPIKEY: " + apiKey + "\n");
    Serial.print("Content-Type: application/x-www-form-urlencoded\n");
    Serial.print("Content-Length: ");
    Serial.print(data.length());
    Serial.print("\n\n");
    Serial.print(data);
    Serial.print("\n\n");

    // send the actual HTTP request
    client.print("POST /update HTTP/1.1\n");
    client.print("Host: api.thingspeak.com\n");
    client.print("Connection: close\n");
    client.print("X-THINGSPEAKAPIKEY: " + apiKey + "\n");
    client.print("Content-Type: application/x-www-form-urlencoded\n");
    client.print("Content-Length: ");
    client.print(data.length());
    client.print("\n\n");
    client.print(data);

    // Wait for server to respond
    unsigned long timeout = millis();
    while (client.connected() && millis() - timeout < 10000) {
      if (client.available()) {
        String line = client.readStringUntil('\n');
        Serial.println(line);  // Print server response for debugging
```

```
    }
  }

    client.stop(); // stop client connection
    Serial.println("Data sent to ThingSpeak");

    // Indicate successful data transmission
    digitalWrite(D1, HIGH);
    delay(100); // Briefly turn on the LED
    digitalWrite(D1, LOW);
  } else {
    Serial.println("Failed to connect to ThingSpeak");
    // Keep the LED off if data transmission fails
    digitalWrite(D1, LOW);
  }
}
```

CONCLUSION

The IoT-Based Smart Helmet for Industrial Workers represents a transformative advancement in occupational safety, offering a comprehensive solution to enhance worker protection in hazardous environments. This innovative helmet seamlessly integrates advanced sensors, real-time monitoring systems, and cloud-based connectivity to provide immediate hazard detection and prevention. These features ensure that workers are promptly alerted to potential dangers, significantly reducing the risk of accidents and injuries on the job.

One of the standout features of the smart helmet is its ability to collect and transmit real-time data. This capability allows for continuous monitoring of various environmental conditions, such as temperature, humidity, and the presence of toxic gasses. By keeping track of these factors, the helmet can alert workers to unsafe conditions before they escalate into serious threats. Moreover, the data collected is not only beneficial for immediate safety but also provides valuable insights to on-site and remote stakeholders. This continuous flow of information enables supervisors and safety managers to make informed, data-driven decisions, optimizing workplace safety protocols and responses to potential hazards.

The integration of cloud connectivity further amplifies the helmet's utility by ensuring that the collected data is accessible from anywhere. This feature supports remote monitoring, allowing safety officers and management teams to oversee multiple sites simultaneously and respond swiftly to any emerging issues. The ability to access real-time data remotely also facilitates better coordination and communication between different teams and departments, enhancing overall operational efficiency.

Looking ahead, the smart helmet project holds significant promise for future enhancements, particularly with the integration of machine learning technologies. By leveraging machine learning, the helmet could become even more adept at identifying patterns and predicting potential hazards based on historical data. This proactive approach would mark a significant advancement in preventive safety measures, shifting the focus from reactive to predictive and preventive strategies.

As industries continue to evolve, the collaborative efforts of various stakeholders will be crucial in refining and amplifying the impact of this technological solution. Industry-wide adoption of the smart helmet could lead to standardized safety practices, ensuring that workers across

different sectors benefit from enhanced protection. Such widespread implementation would not only improve individual workplace safety but also contribute to broader industry standards and regulations.

The success of the IoT-Based Smart Helmet underscores its pivotal role in creating safer and healthier work environments. It represents a major stride towards the future of industrial safety, highlighting the importance of integrating advanced technologies into traditional safety measures. Special acknowledgments are extended to the dedicated project team, mentors, contributors, and collaborators whose expertise and commitment have been instrumental in bringing this innovative solution to fruition. Their collective efforts have been key to the development and success of the smart helmet, paving the way for a safer industrial landscape.

REFERENCES

[1]   Report of industriALL, a global union of workers,"India's safety crisis: industrial

        accidents during Covid-19 kill at least 75".

[2]   Report of The Hindu, "Data | Industrial accidents claimed over 6,300 lives between 2014
        and 2017".

[3]   Report of Deccan Herald, "32 accidents in industrial units in last two months; 75 killed".

[4]   Report of industriALL, "Six workers killed at Indian steel plant"

[5]   Sreenithy Chandran, Sneha Chandrasekar, Edna Elizabeth N, "Konnect: An Internet of

        Things (IoT) based smart helmet for accident detection and notification" Published in:
        2016 IEEE Annual India Conference (INDICON).

[6]   JesudossA, Vybhavi R, Anusha B "Design of Smart Helmet for Accident Avoidance"
        Published in: 2019 International Conference on Communication and Signal Processing
        (ICCSP). Added to: IEEE Xplore.

[7]   K.M. Mehata, S.K. Shankar, Karthikeyan N, Nandhinee K, Robin Hedwig P "IoT Based
        Safety and Health Monitoring for Construction Workers. Helmet System with Data Log
        System", Published in: 2019 1st International Conference on Innovations in Information
        and Communication Technology (ICIICT). Added to: IEEE Xplore.

[8]   Shruti P. Borkar, V. B. Baru, "IoT Based Smart Helmet for Underground Mines" Published
        in: International Journal of Research in Engineering, Science and Management Volume1,
        Issue-9, September-2018.

[9]   google, github, wikipedia, quora Swetha. B, Bhavya Shree. R, Disha. K. V, "Smart Helmet

[10]   "Internet   of   Things: Principles   and   Paradigms"   by
             Rajkumar

        Buyya, Amir Vahid Dastjerdi:
• This book provides a comprehensive overview of IoT principles and applications, offering insights
    into cloud platforms like ThingSpeak and their integration with IoT devices.

[11]   "Arduino Cookbook" by Michael Margolis:
• A valuable resource for Arduino programming and sensor integration, this book offers practical
    examples and solutions for using various sensors and modules.

[12]   "Internet of Things with Arduino Blueprints" by Pradeeka Seneviratne:

[13]   ThingSpeak Documentation:

•   The official documentation for ThingSpeak provides detailed instructions and examples for setting up and using the platform. Available at: ThingSpeak Documentation [14]   Arduino Documentation:

•   The official Arduino website offers extensive documentation and tutorials for using the Arduino platform and various sensors. Available at: Arduino Documentation [15] DHT11 Sensor Data Sheet:

•   The DHT11 data sheet provides technical specifications and usage guidelines for the DHT11 temperature and humidity sensor. Available at: DHT11 Data Sheet [16]   MPU6050 Data Sheet:

•   The MPU6050 data sheet offers technical details and programming examples for using the

    MPU6050 accelerometer and gyroscope sensor. Available at: MPU6050 Data Sheet [17] Coursera: "An Introduction to Programming the Internet of Things (IoT)" by University of California, Irvine:

•   This course provides a foundational understanding of IoT, covering topics such as sensor integration and cloud connectivity. Available at: Coursera IoT Course [18] Instructables and Hackster.io:

•   Websites like Instructables and Hackster.io offer numerous DIY projects and tutorials for Arduino and IoT applications, providing step-by-step guides and community support. Available at: Instructables and Hackster.io

[19]   "IoT-based Smart Helmet for Accident Detection and Notification" by P. Neethu, S.

    Chitra, and K. Arthi, International Journal of Engineering Research & Technology (IJERT):

    • This paper discusses the design and implementation of a smart helmet using IoT technologies, similar to the project described. Available at: IJERT

[20]   "Implementation of Smart Helmet for Coal Mine Safety" by Khondaker Abdullah Al Mamun, Mahammad A. Hannan, Azah Mohamed, IEEE:

    • This research explores the use of smart helmets in industrial environments, providing insights into sensor integration and safety monitoring. Available at: IEEE Xplore