

Cassette awning

markilux 900

The unique balcony awning
with markilux folding arm technology to be fixed with accro bars.

DESIGN AWARD 2024


reddot winner 2024
best of the best

markilux.com

markilux
safe timeless beautiful

Product Characteristics

Wind resistance class 2
Beaufort 5 → 7.5–10.4 m/s → 28–37 km/h → 17–23 mph

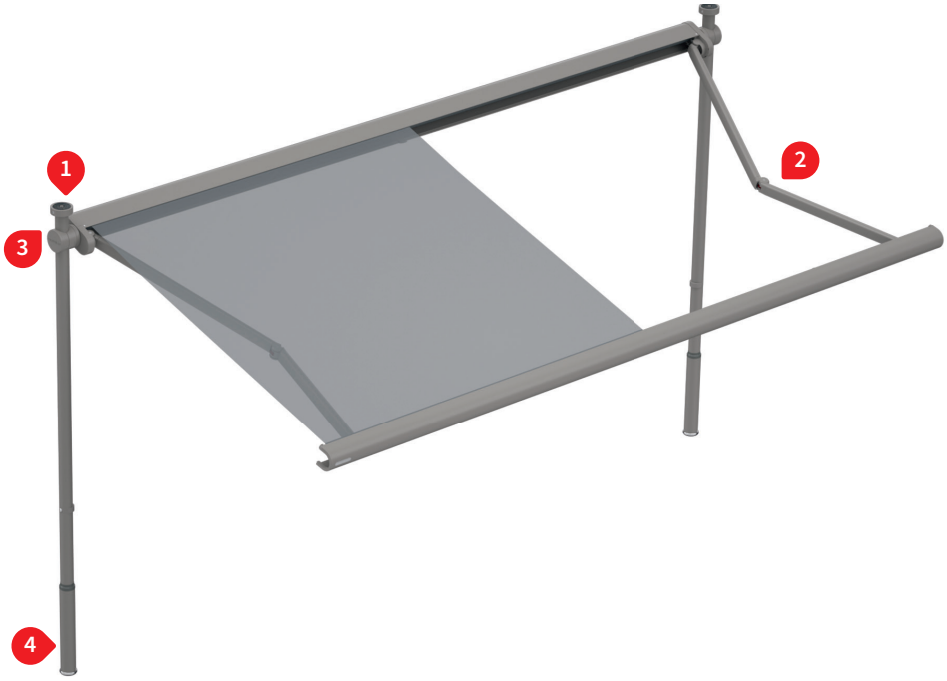

1 fixture with wedge-in accro bars



1 fixture with wedge-in accro bars, view from the rear, pitch 45 degrees



1 top fixture




1 top fixture, view from the rear




2 bionic tendon made of high-tech fibres for optimum power transference



awning retracted

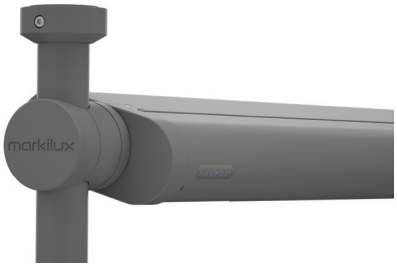

during extension

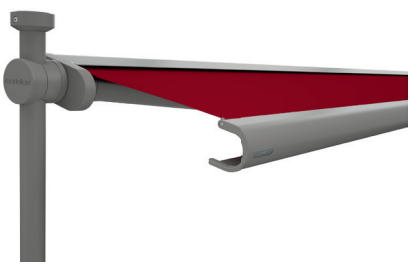

3 manual operation



4 cross section of a base with wedge-in accro bar



Product characteristics

Description

- Minimalist cassette awning with folding arms, installation possible with wedge-in accro bars, top fixture, face fixture or eaves fixture brackets

Special features

- Compact cassette profile that lends an attractive appearance to the unit
- Cassette with arms situated at the front and at each end, which – when the awning is closed – are encompassed fully by the front profile lending a harmonious overall appearance to the awning
- Plenty of shade even when the awning is only slightly inclined – ideal for balconies For an unlimited sense of space with a clear view
- Generous pitch adjustment range of the awning from 5–70° – thus also suitable as protection against prying eyes
- Installation with wedge-in accro bars: convenient assembly/disassembly with few drill holes compared to conventional awning brackets
- The awning cassette is inserted into the holders of the particular fixture types, simple assembly
- Any unevenness of the installation surface can be levelled out thanks to the movable articulated base on the wedge-in accro bars The technical function is elegantly concealed and invisible
- Top-quality surface finish, profiles in façade quality, powder coated (including wedge-in accro bars)
- Wedge-in accro bars are also available in a different standard colour
- Cover can be selected from over 200 fabric patterns of the markilux collection to suit a range of different living styles

Dimensions

- Cassette in the standard version: height 105 mm, depth 225 mm
- Single unit: width 200–400 cm, projection 150 cm or 200 cm
- Adjustment range accro bar: 235–265 cm wedge-in height, on request 270–300 cm wedge-in height available

Roller tube and lateral bearings

- Round roller tube Ø 63 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths

Blind profiles

- extruded aluminium, in façade quality, powder coated
- Single-piece cassette profile
- Semi-circular front profile

Folding arms

- Profiles in extruded aluminium, in façade quality, powder coated
- Moving parts made of drop-forged aluminium – the arms are therefore extremely fracture resistant
- Pivot bolts in stainless steel run in Teflon-coated bronze bushes - practically maintenance free, virtually silent and extremely hard wearing
- Power transference via the innovative markilux bionic tendon at the elbow joint, made of high tensile, hightech fibres – low in friction, noiseless, impervious to corrosion and UV resistant, independently tested by the Fraunhofer Institute

Side caps

- Two-piece side cap for the cassette made of top-quality plastic, powder coated
- Front profile end caps made of top-quality plastic, dyed-through, with water draining spouts

Fixture

- Fixture with wedge-in accro bars, face fixture, top fixture, eaves fixture
- Top fixture brackets and face fixture brackets with decorative covers, powder coated
- Wedge-in accro bars with brackets and articulated base, powder coated
- Railing securing for additional attachment of the wedge-in accro bars on the balcony railing, included in the scope of delivery by default


Frame colours

markilux frame colours without a surcharge

traffic white, RAL 9016



stone grey metallic, 5215 [1)]

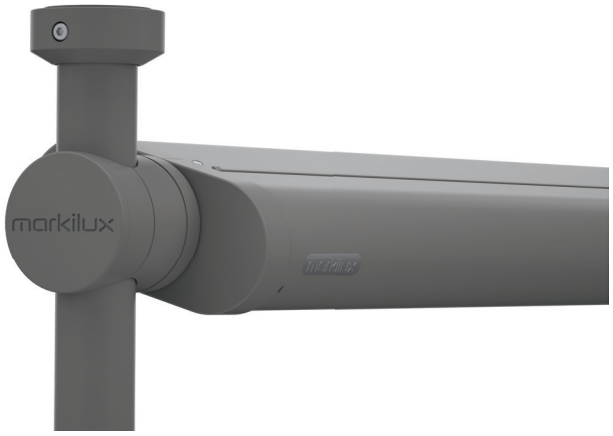

anthracite metallic, 5204 [1)]



Special coating

Bespoke RAL colours incur a surcharge – matt, metallic and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. At a surcharge, all frame colours are available with enhanced corrosion protection.

Colours may differ slightly from those depicted in both hue and finish.In the case of special coating, dyed-to-the-core plastic parts may differ in colour.

1) textured finish

Dimensions and configuration options

Single unit

Order dimensions		Awning width 200 194 – 200	250 201 – 250	300 251 – 300	350 301 – 350	400 351 – 400	Minimum widths
H	150	1)					194
	200		1)				244

1) = please note the minimum widths!

H = projection

= 2 folding arms, 2 brackets

= 2 standard arms

dimensions in cm

Operation	standard	optional
crank handle	✓	—
spring-assisted crank handle	—	—
hard-wired motor	—	✓
silentec motor (optionally with external radio receiver io)	—	—
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓
868 MHz radio-controlled motor io with manual override	—	—

Coupled awnings

not available

Awning cover	fabric pattern no.	standard	optional
sunvas	300.. – 315..	✓	—
sunsilk	324.. / 328.. / 369..	✓	—
sunbow	411.. – 427..	✓	—
smart art	340..	—	✓
perla FR	371.. / 372..	—	✓

Shadeplus

not available

Optional accessories

Automatic controls (light, wind, rain)

For more detailed information, please refer to the chapter “Optional Accessories” in the main catalogue.

Fixture options

clamp for wedge-in accro bar	62249.
cap for wedge-in accro bar	62250.
balcony securing	622601
face fixture bracket right / top fixture bracket left	62247.
face fixture bracket left / top fixture bracket right	62248.
eaves ficture bracket 150 mm	75889.
eaves ficture bracket 270 mm	71659.
angle and plate for eaves fixture machine finish aluminium, plate 500 mm	716620
spreader plate 260 × 60 × 12 mm for eaves fixture bracket	75383.


No. of brackets | No. of fixing points

		Awning width				
		200	250	300	350	400
Order dimensions		194 – 200	201 – 250	251 – 300	301 – 350	351 – 400
	BHT	No. of brackets | No. of fixing points				
S	10	2 | 2				
DE	13,8	2 | 8				

Dimensions in cm

BHT = bracket width
DE = top fixture brackets
S = accro bar (contact surface diameter above under BHT)

Fixture range wedge-in accro bars

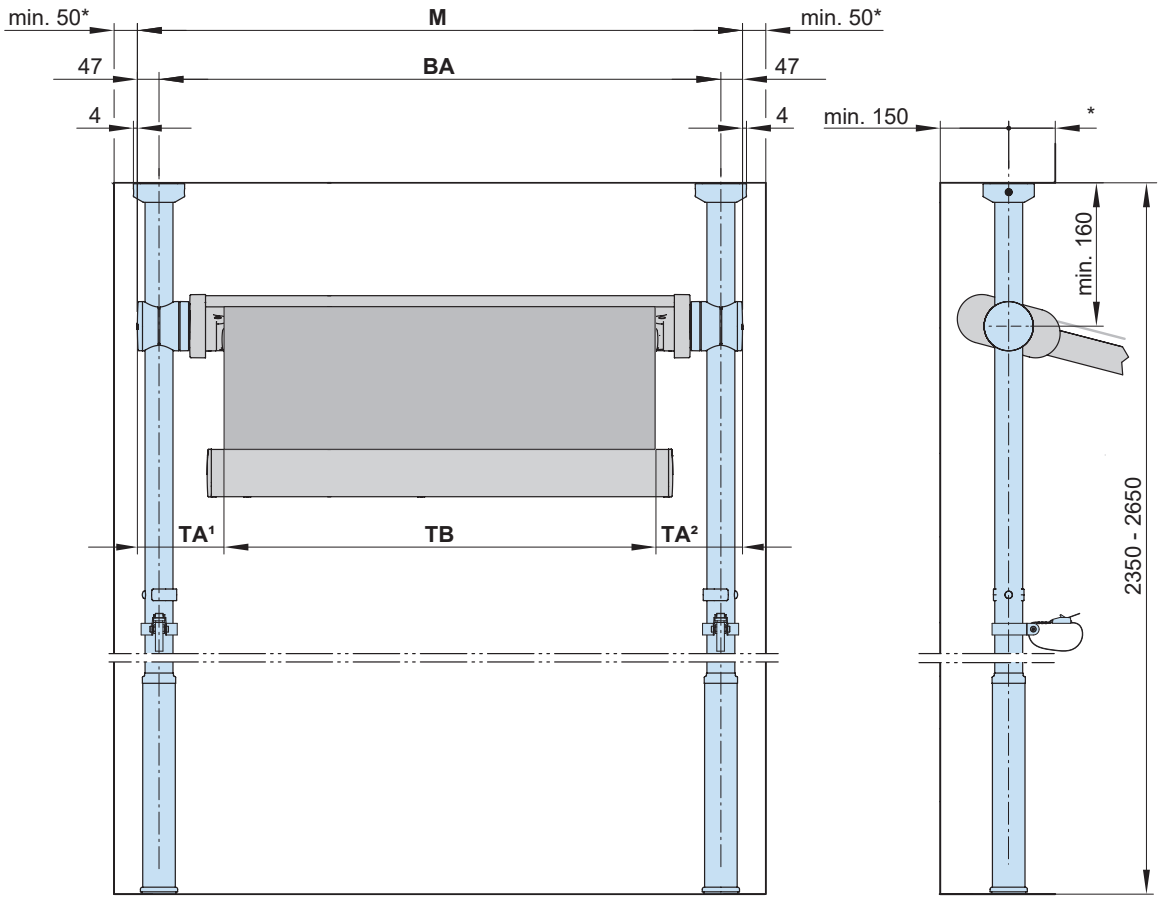


* = observe the minimum edge distance specified by the fixture material supplier
AM = installation dimensions
BA = fixture width
M = **order dimension** = overall awning width


TA[1] = cover width deductions
with a motor = 189 mm
with a gearbox (operating side left) = 205 mm
TA[2] = cover width deductions
with a motor = 189 mm
with a gearbox (operating side left) = 189 mm
TB = cover width = M - TA[1] - TA[2]

dimensions in mm


Fixture range top fixture

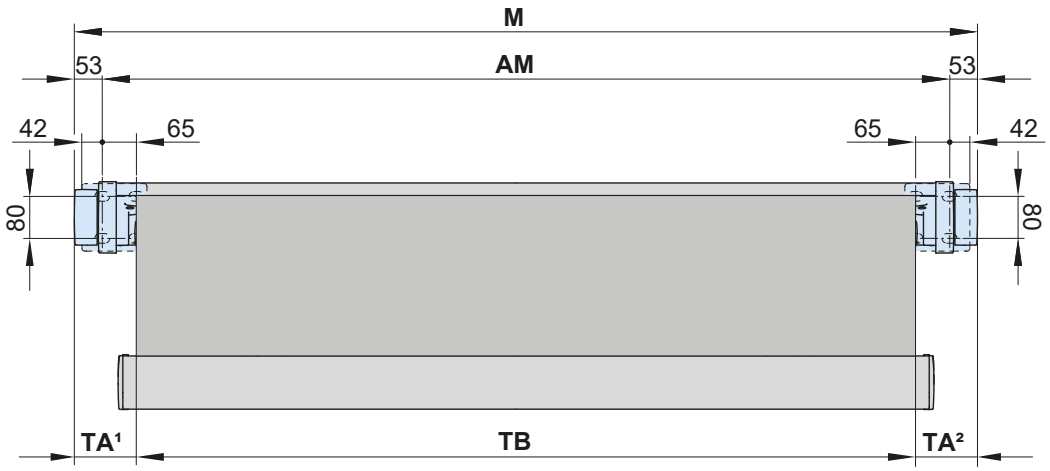

Fixture range top fixture

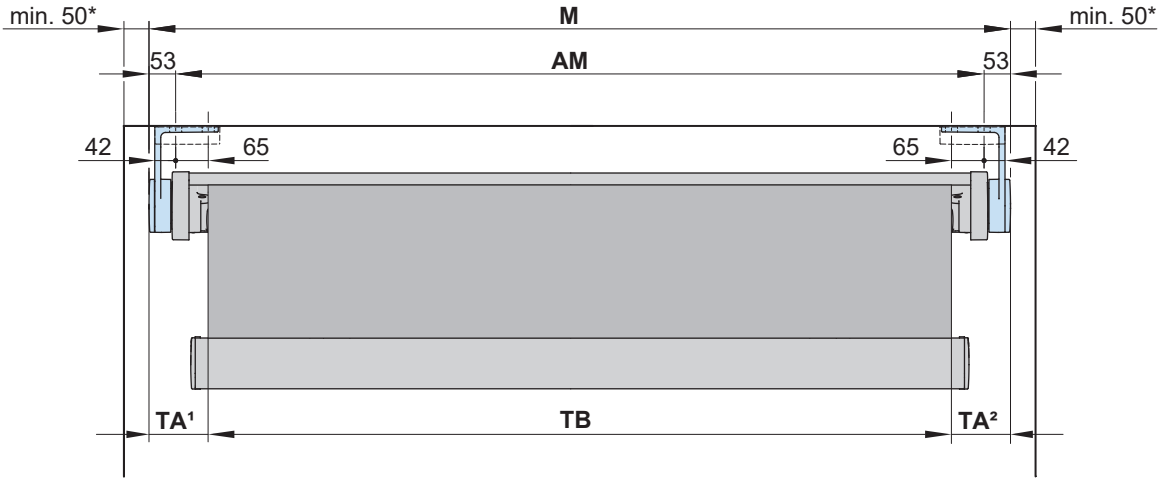

Fixture range eaves fixture

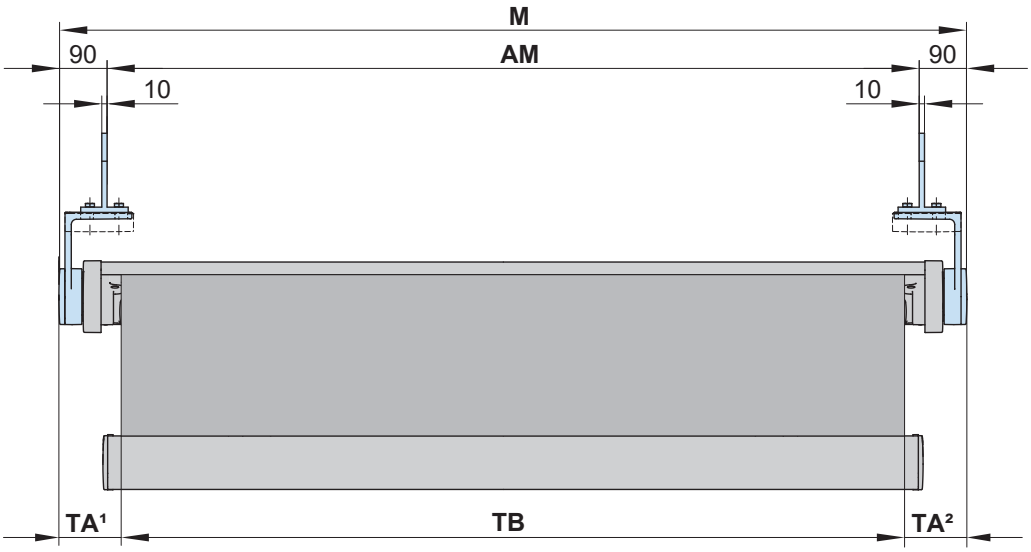


* = observe the minimum edge distance specified by the fixture material supplier
AM = installation dimensions
M = **order dimensions** = awning width

TA[1] = cover width deductions
with a motor = 123 mm
with a gearbox (operating side left) = 139 mm
TA[2] = cover width deductions
with a motor = 123 mm
with a gearbox (operating side left) = 123 mm
TB = cover width = M - TA[1] - TA[2]

dimensions in mm


Fixture with wedge-in accro bars

Fixtures, fittings and accessories




clamp for wedge-in accro bar

62249.



cap for wedge-in accro bar

62250.




balcony securing 60 mm


622601



safety clip

62224.

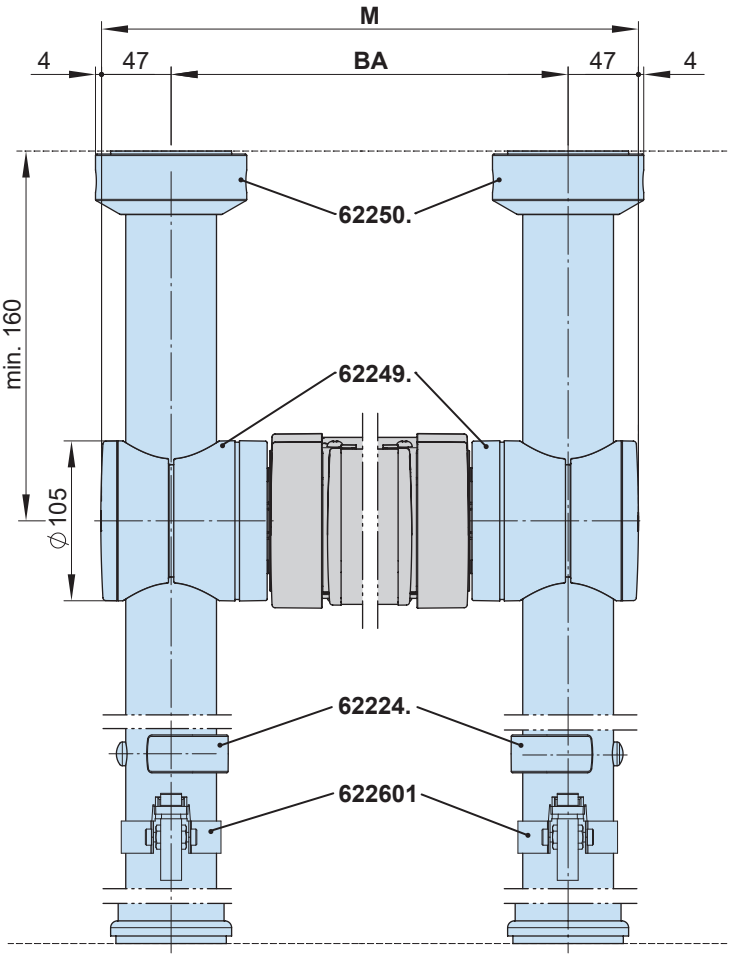

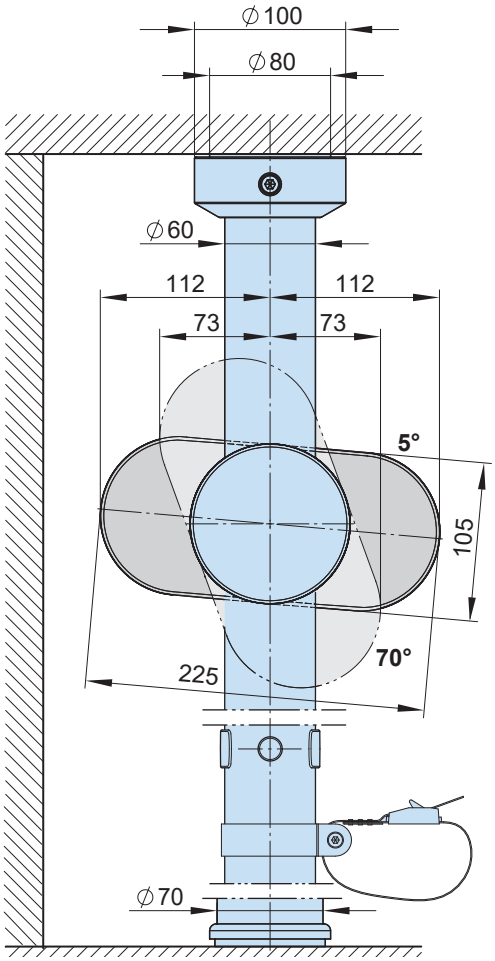


62224. = safety clip
62249. = clamp for wedge-in accro bar
62250. = cap for wedge-in accro bar
622601 = balcony securing
BA = width between fixture points
M = **order dimension** = overall awning width

dimensions in mm

Fixture with wedge-in accro bars

Maximum height | Minimum height | Delivery state

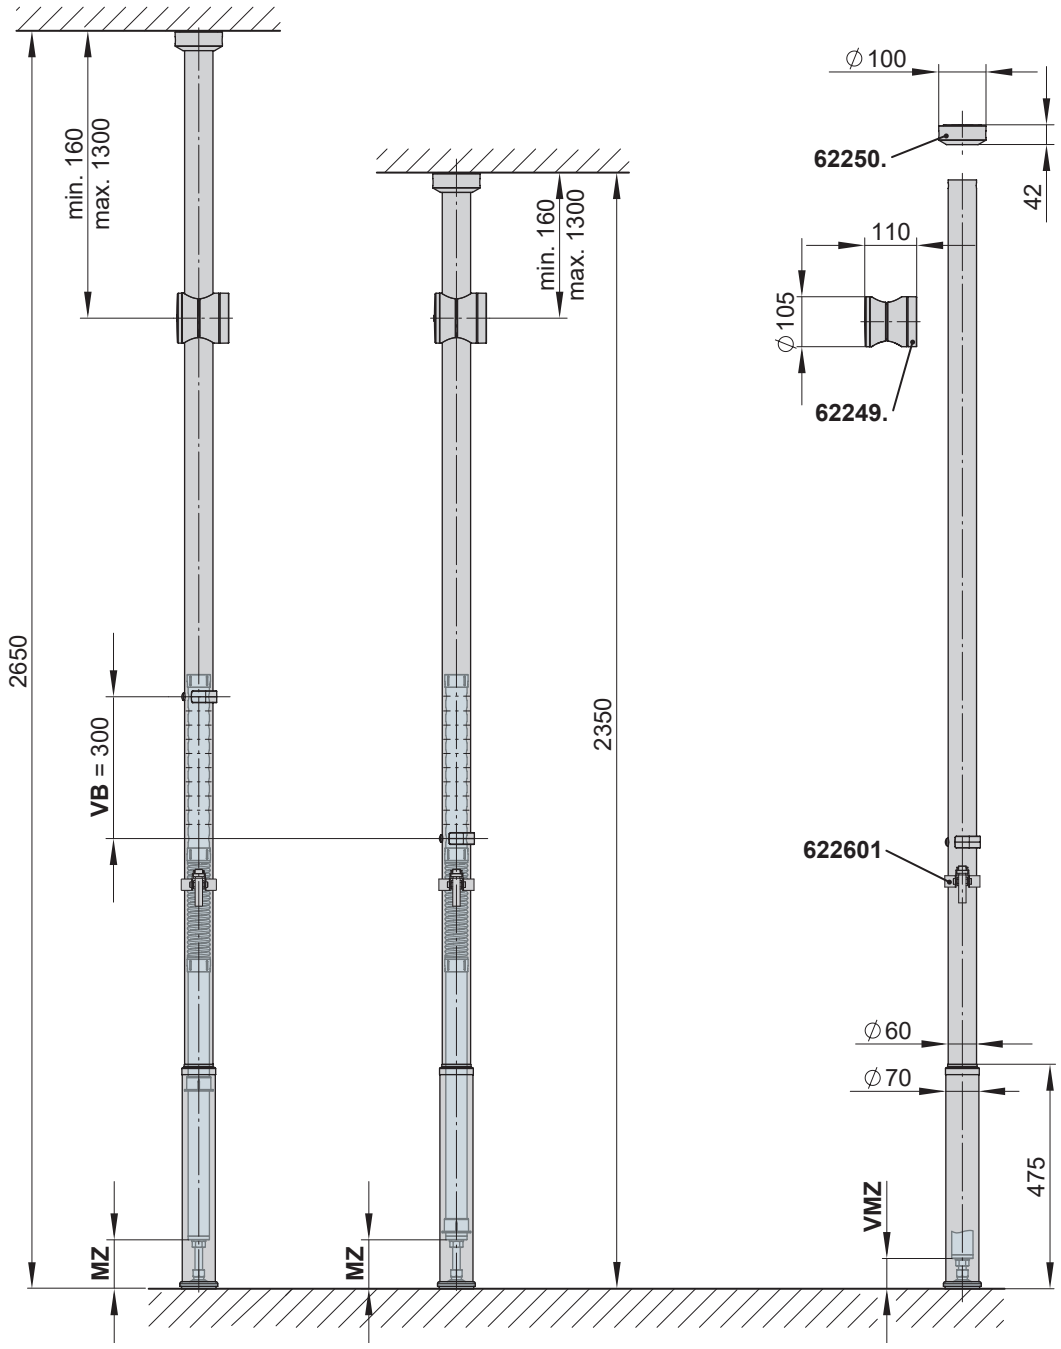


Please note: The accro bars are also available with a wedge-in height of 270–300 cm.

62249. = clamp for wedge-in accro bar
62250. = cap for wedge-in accro bar
622601 = balcony securing
MZ = assembled state
VB = adjustment range
VMZ = pre-assembled state

dimensions in mm


Face fixture

Fixtures, fittings and accessories




face fixture bracket
left

62248.



face fixture bracket
right


62247.



spacer plate
for face/top fixture


150x 136 x 20 mm; black
N.B!
stack to a max. height of 200 mm

716331



spacer plate for face fixture
150 × 136 × 12 mm

71644.

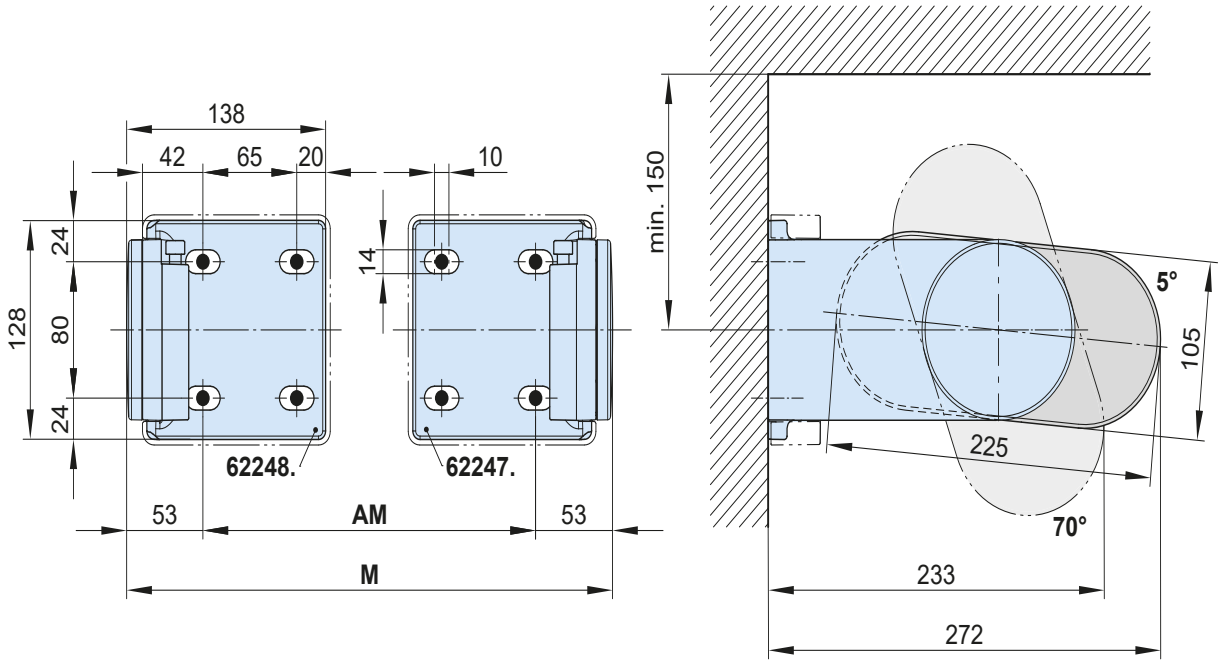


62247. = face fixture bracket, right
62248. = face fixture bracket, left
AM = installation dimensions
M = **order dimensions** = awning width

dimensions in mm


Top fixture

Fixtures, fittings and accessories




top fixture bracket
left

62247.



top fixture bracket
right


62248.



spacer plate
for face/top fixture
150 × 136 × 20 mm


N.B!
stack to a max. height of
200 mm


716331



spacer plate for face
fixture
150 × 136 × 12 mm

71644.

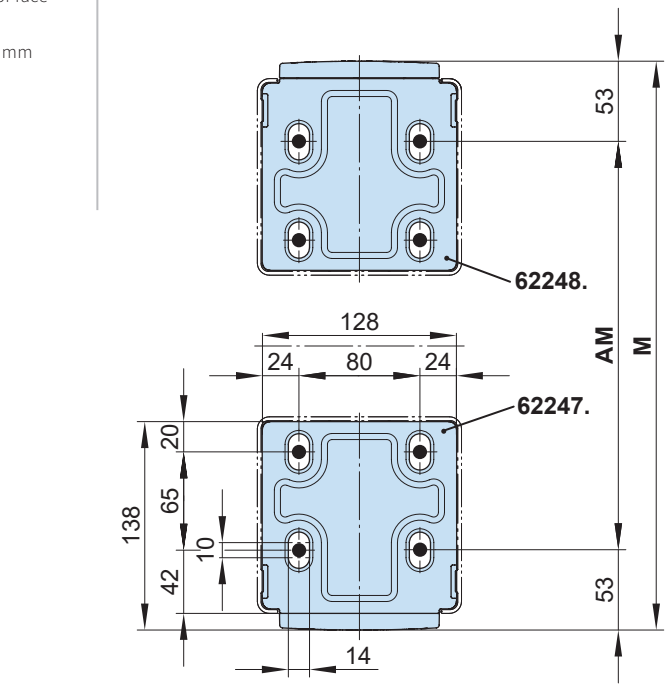

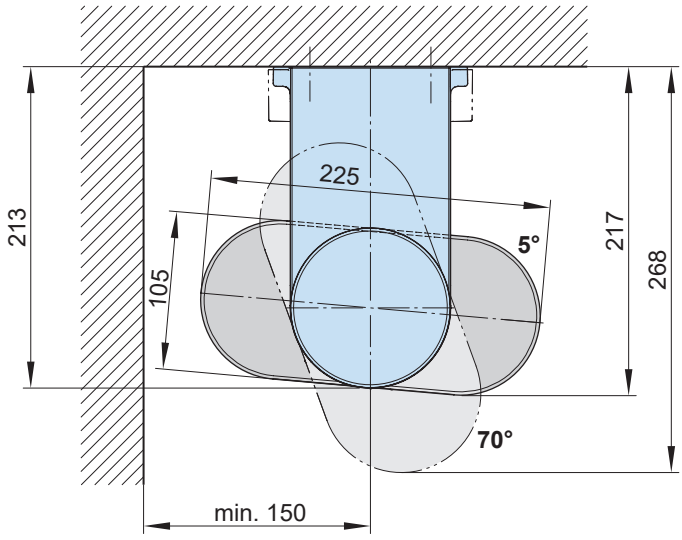


62247. = top fixture bracket, left
62248. = top fixture bracket, right
AM = installation dimensions
M = **order dimension** = overall awning width

dimensions in mm

Eaves fixture


Fixtures, fittings and accessories



eaves fixture bracket
90 mm

150 mm plate


75889.



eaves fixture bracket
90 mm


height of flat plate
270 mm

71659.




top fixture bracket
left

62247.



top fixture bracket
right


62248.



angle and plate for
eaves fixture
height of plate 500 mm


machine finish

716620




N.B.! At a pitch of more than 46° to the horizontal there must be an accessible area behind the awning at least 60 cm deep to allow manual operation incl. operation via radio-controlled motor with manual override. There are no limitations with motor systems.

With eaves fixture bracket 150 mm (75889.)

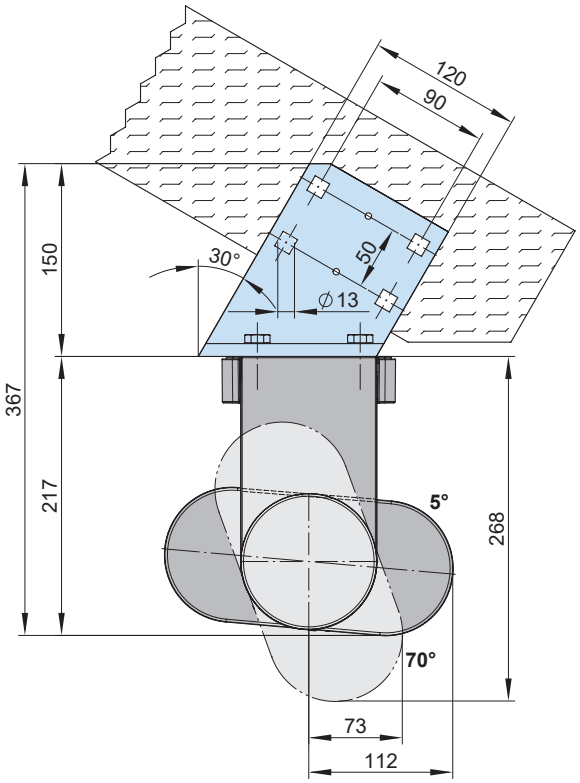


With eaves fixture bracket, top flat plate 270 mm (71659.)

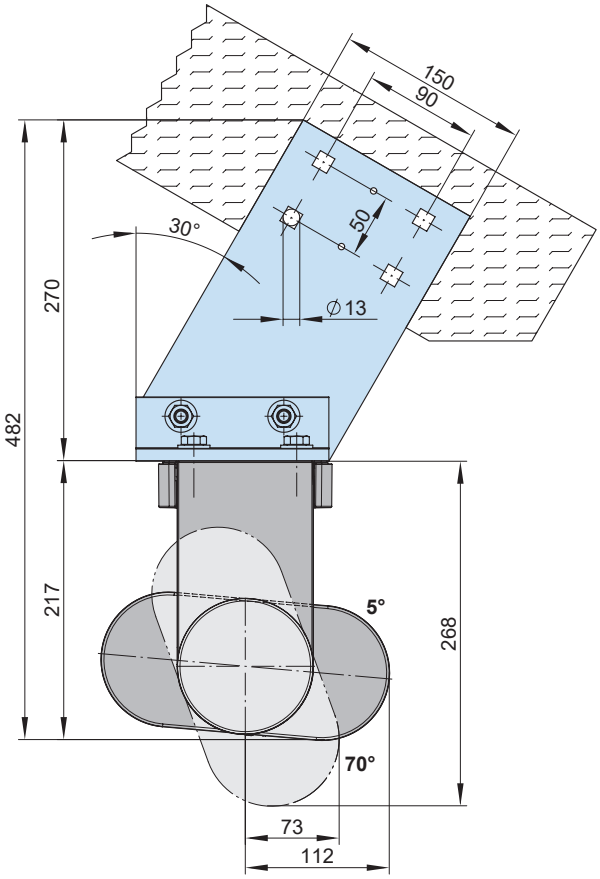

dimensions in mm

Eaves fixture with additional plate


Fixtures, fittings and accessories



eaves fixture bracket
90 mm

150 mm plate


75889.



eaves fixture bracket
90 mm


height of flat plate
270 mm

71659.




top fixture bracket
left

62247.



top fixture bracket
right


62248.



supplementary flat plate
for eaves fixture


260 × 60 × 12 mm

75383.




N.B.! At a pitch of more than 46° to the horizontal there must be an accessible area behind the awning at least 60 cm deep to allow manual operation incl. operation via radio-controlled motor with manual override. There are no limitations with motor systems.

With eaves fixture bracket 150 mm (75889.)

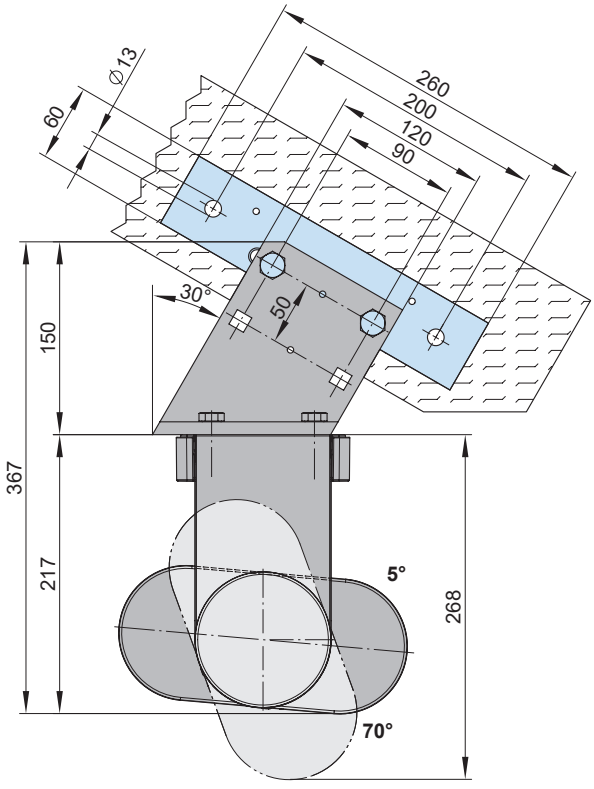



With eaves fixture bracket, top flat plate 270 mm (71659.)

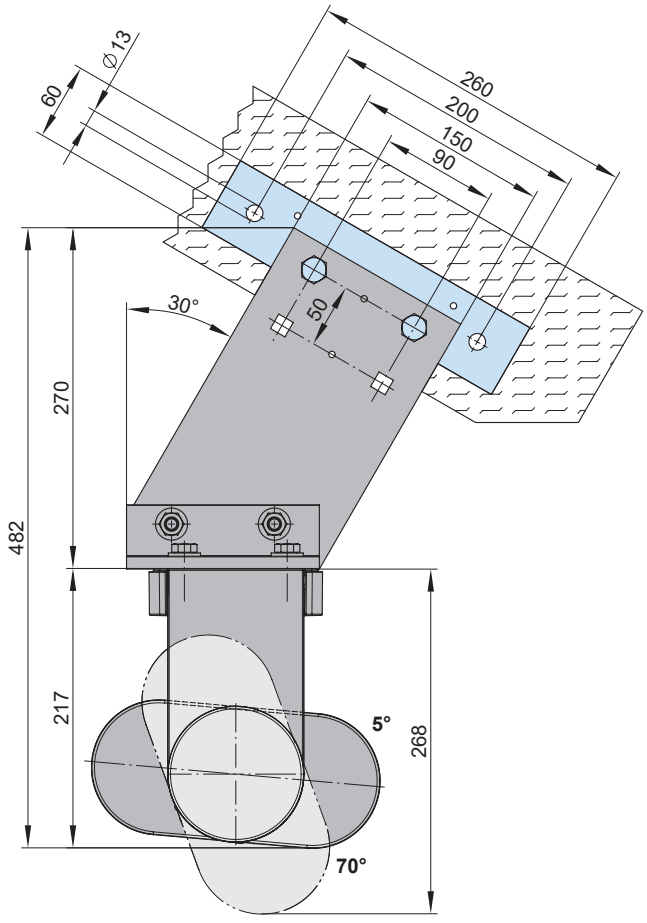

dimensions in mm


Top fixture with gearbox

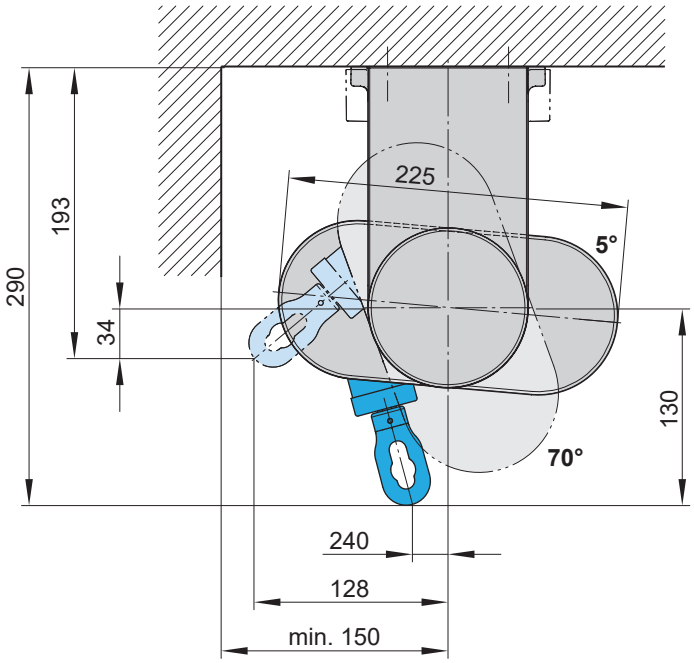




N.B! At a pitch of more than 46° to the horizontal there must be an accessible area behind the awning at least 60 cm deep to allow manual operation. There are no limitations with motor systems.

Motor cable exit point

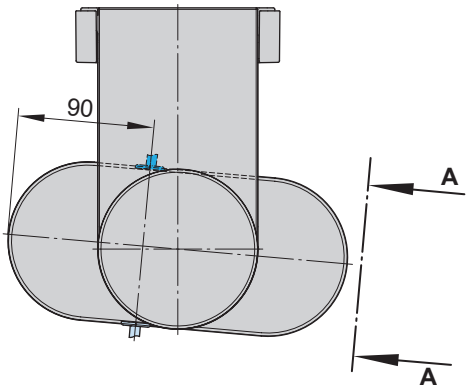

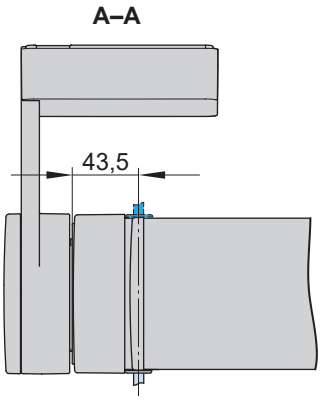

= standard
= optional

dimensions in mm

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19