Chapter 11: File System Implementation

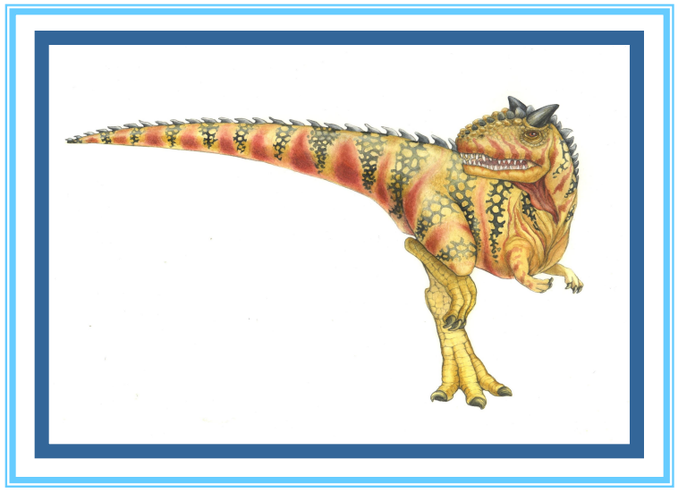

File-System Structure

- File structure
  - Logical storage unit
  - Collection of related information
- **File system** resides on secondary storage (disks)
  - Provided user interface to storage, mapping logical to physical
  - Provides efficient and convenient access to disk by allowing data to be stored, located retrieved easily
- Disk provides in-place rewrite and random access
  - I/O transfers performed in **blocks** of **sectors** (usually 512 bytes)
- **File control block** – storage structure consisting of information about a file
- File system organized into layers

Layered File System

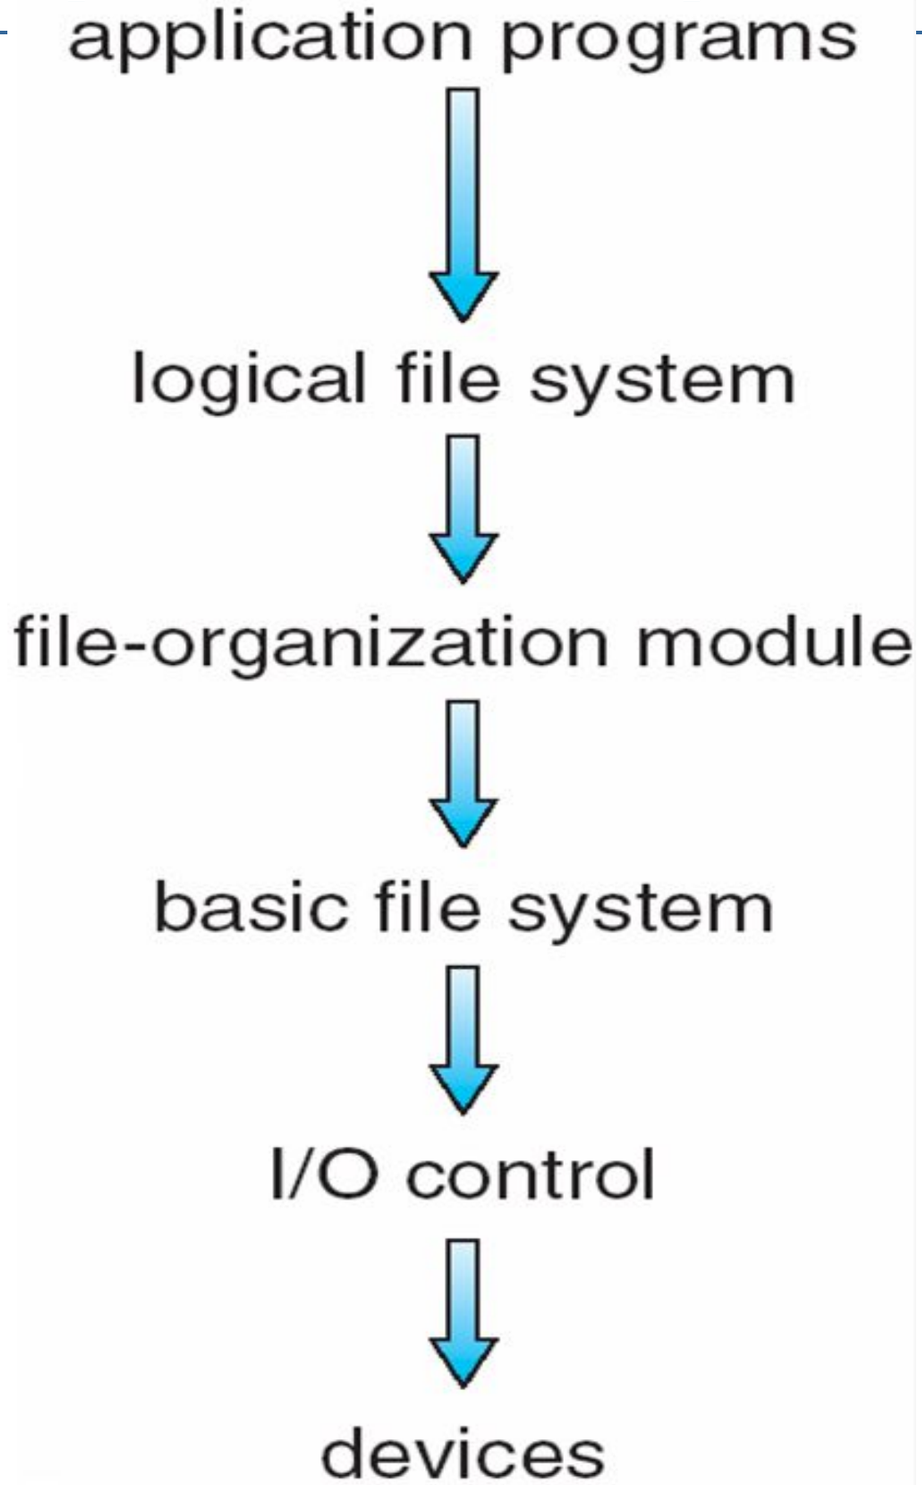

File System Layers

- **Device drivers** manage I/O devices at the I/O control layer
  - Given commands like “read drive1, cylinder 72, track 2, sector 10, into memory location 1060” outputs low-level hardware specific commands to hardware controller
- **Basic file system** given command like “retrieve block 123” translates to device driver
  - Also manages memory buffers and caches (allocation, freeing, replacement)
    - Buffers hold data in transit
    - Caches hold frequently used data
- **File organization module** understands files, logical address, and physical blocks
  - Translates logical block # to physical block #
  - Manages free space, disk allocation

File System Layers (Cont.)

- **Logical file system** manages metadata information
  - Translates file name into file number, file handle, location by maintaining file control blocks (**inodes** in Unix)
  - Directory management
  - Protection
- Layering useful for reducing complexity and redundancy, but adds overhead and can decrease performance
  - Logical layers can be implemented by any coding method according to OS designer
- Many file systems, sometimes many within an operating system
  - Each with its own format (CD-ROM is ISO 9660; Unix has **UFS**, FFS; Windows has FAT, FAT32, NTFS as well as floppy, CD, DVD Blu-ray, Linux has more than 40 types, with **extended file system** ext2 and ext3 leading; plus distributed file systems, etc)
  - New ones still arriving – ZFS, GoogleFS, Oracle ASM, FUSE

File-System Implementation

- We have system calls at the API level, but how do we implement their functions?
  - On-disk and in-memory structures
- **Boot control block** contains info needed by system to boot OS from that volume
  - Needed if volume contains OS, usually first block of volume
- **Volume control block** (**superblock, master file table**) contains volume details
  - Total # of blocks, # of free blocks, block size, free block pointers or array
- Directory structure organizes the files
  - Names and inode numbers, master file table
- Per-file **File Control Block (FCB)** contains many details about the file
  - Inode number, permissions, size, dates

A Typical File Control Block

file permissions
file dates (create, access, write)
file owner, group, ACL
file size
file data blocks or pointers to file data blocks

Partitions and Mounting

- Partition can be a volume containing a file system (“cooked”) or **raw** – just a sequence of blocks with no file system
- Boot block can point to boot volume or boot loader set of blocks that contain enough code to know how to load the kernel from the file system
  - Or a boot management program for multi-os booting
- **Root partition** contains the OS, other partitions can hold other Oses, other file systems, or be raw
  - Mounted at boot time
  - Other partitions can mount automatically or manually

Virtual File Systems

- VFS allows the same system call interface (the API) to be used for different types of file systems
  - Separates file-system generic operations from implementation details
  - Implementation can be one of many file systems types, or network file system
    - Implements vnodes which hold inodes or network file details
  - Then dispatches operation to appropriate file system implementation routines
- The API is to the VFS interface, rather than any specific type of file system

Schematic View of Virtual File System

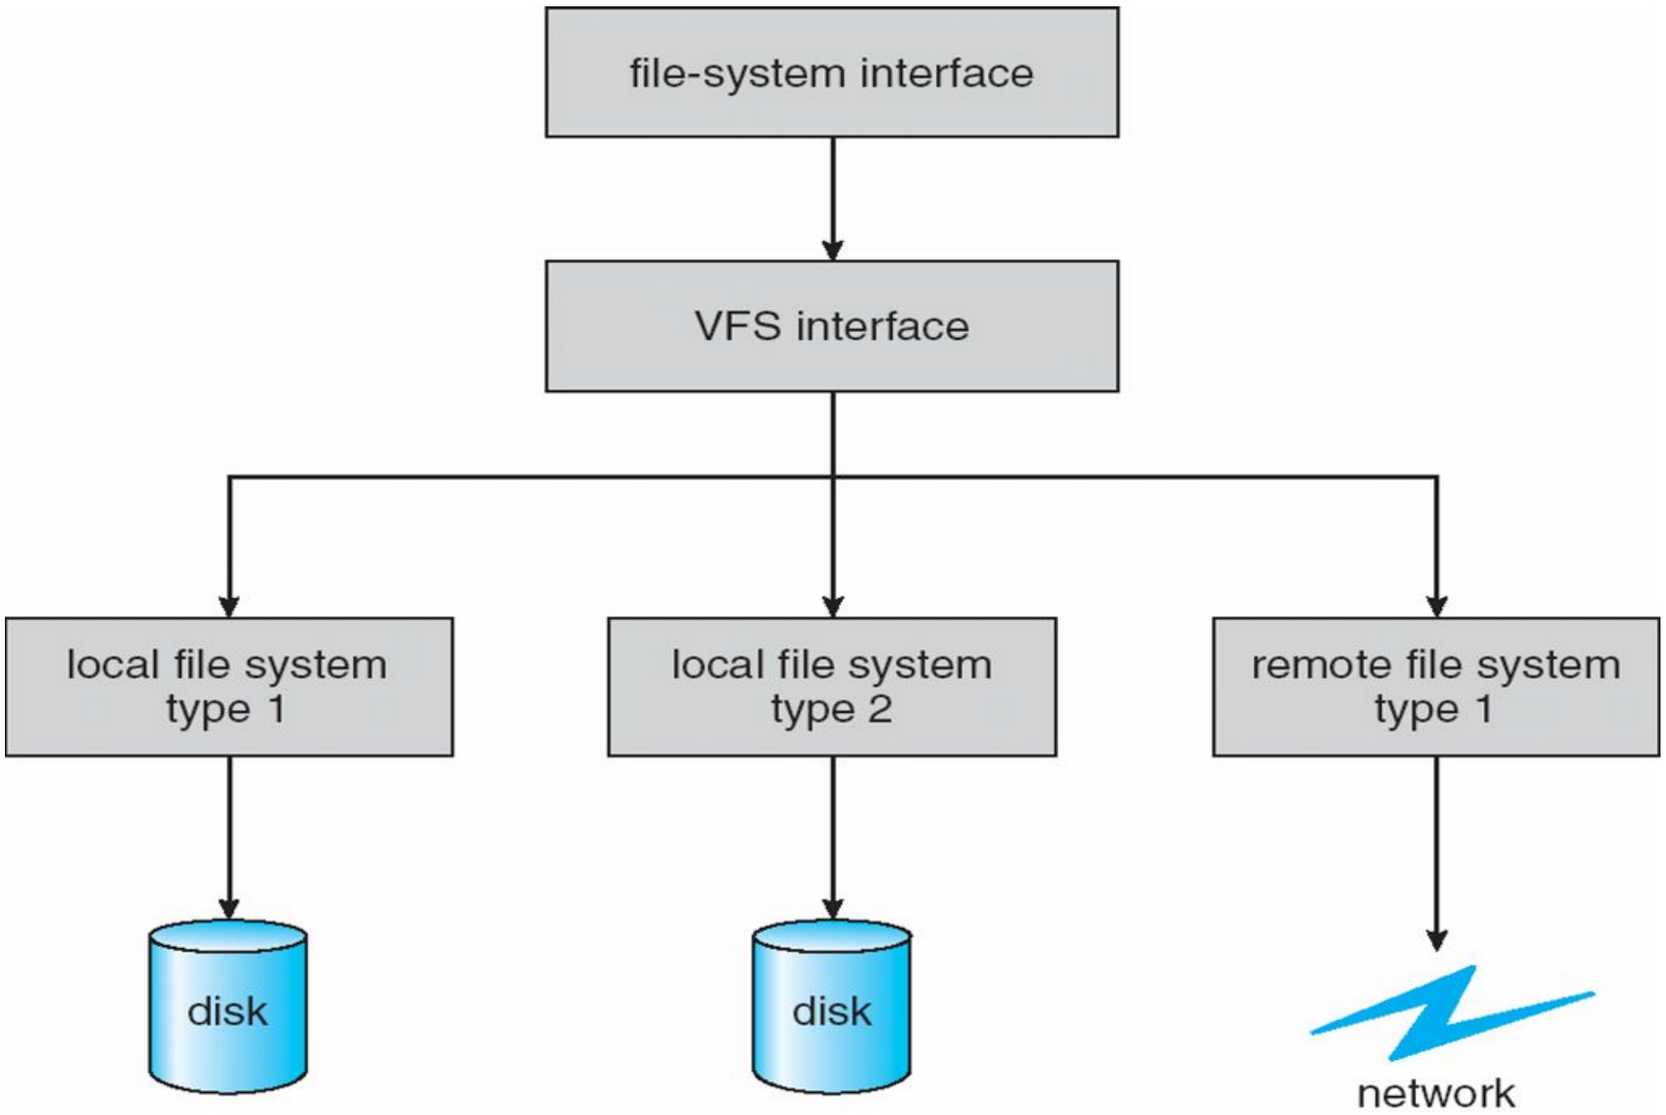

Directory Implementation

- **Linear list** of file names with pointer to the data blocks
  - Simple to program
  - Time-consuming to execute
    - Linear search time
- **Hash Table** – linear list with hash data structure
  - Decreases directory search time
  - **Collisions** – situations where two file names hash to the same location
  - Only good if entries are fixed size, or use chained-overflow method

Allocation Methods - Contiguous

- An allocation method refers to how disk blocks are allocated for files:

- **Contiguous allocation** – each file occupies set of contiguous blocks
  - Best performance in most cases
  - Simple – only starting location (block #) and length (number of blocks) are required
  - Problems include finding space for file, knowing file size, external fragmentation, need for **compaction off-line** (**downtime**) or **on-line**

Contiguous Allocation

- Mapping from logical to physical

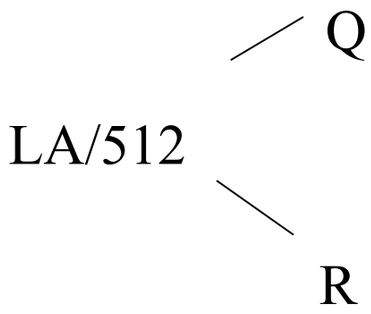

Block to be accessed = Q + starting address
Displacement into block = R

Contiguous Allocation of Disk Space

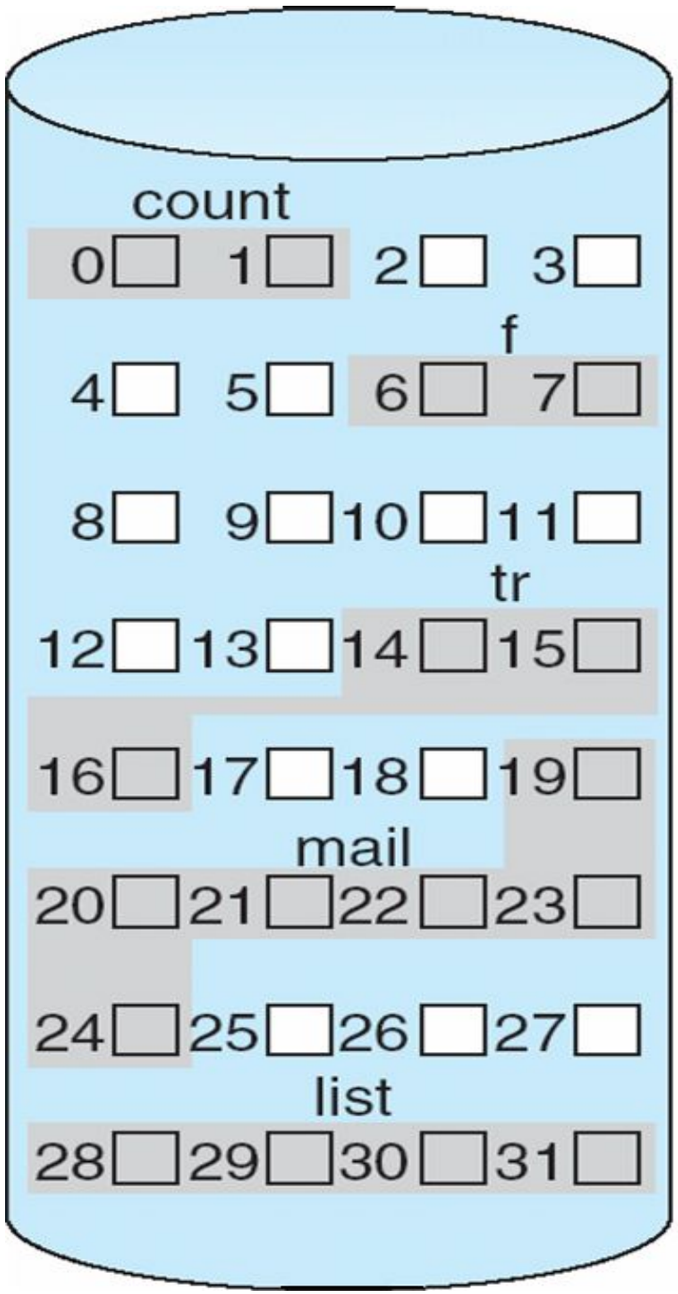

directory

file	start	length
count	0	2
tr	14	3
mail	19	6
list	28	4
f	6	2

Extent-Based Systems

- Many newer file systems (i.e., Veritas File System) use a modified contiguous allocation scheme
- Extent-based file systems allocate disk blocks in extents
- An **extent** is a contiguous block of disks
  - Extents are allocated for file allocation
  - A file consists of one or more extents

Allocation Methods - Linked

- **Linked allocation** – each file a linked list of blocks
  - File ends at nil pointer
  - No external fragmentation
  - Each block contains pointer to next block
  - No compaction, external fragmentation
  - Free space management system called when new block needed
  - Improve efficiency by clustering blocks into groups but increases internal fragmentation
  - Reliability can be a problem
  - Locating a block can take many I/Os and disk seeks

Linked Allocation

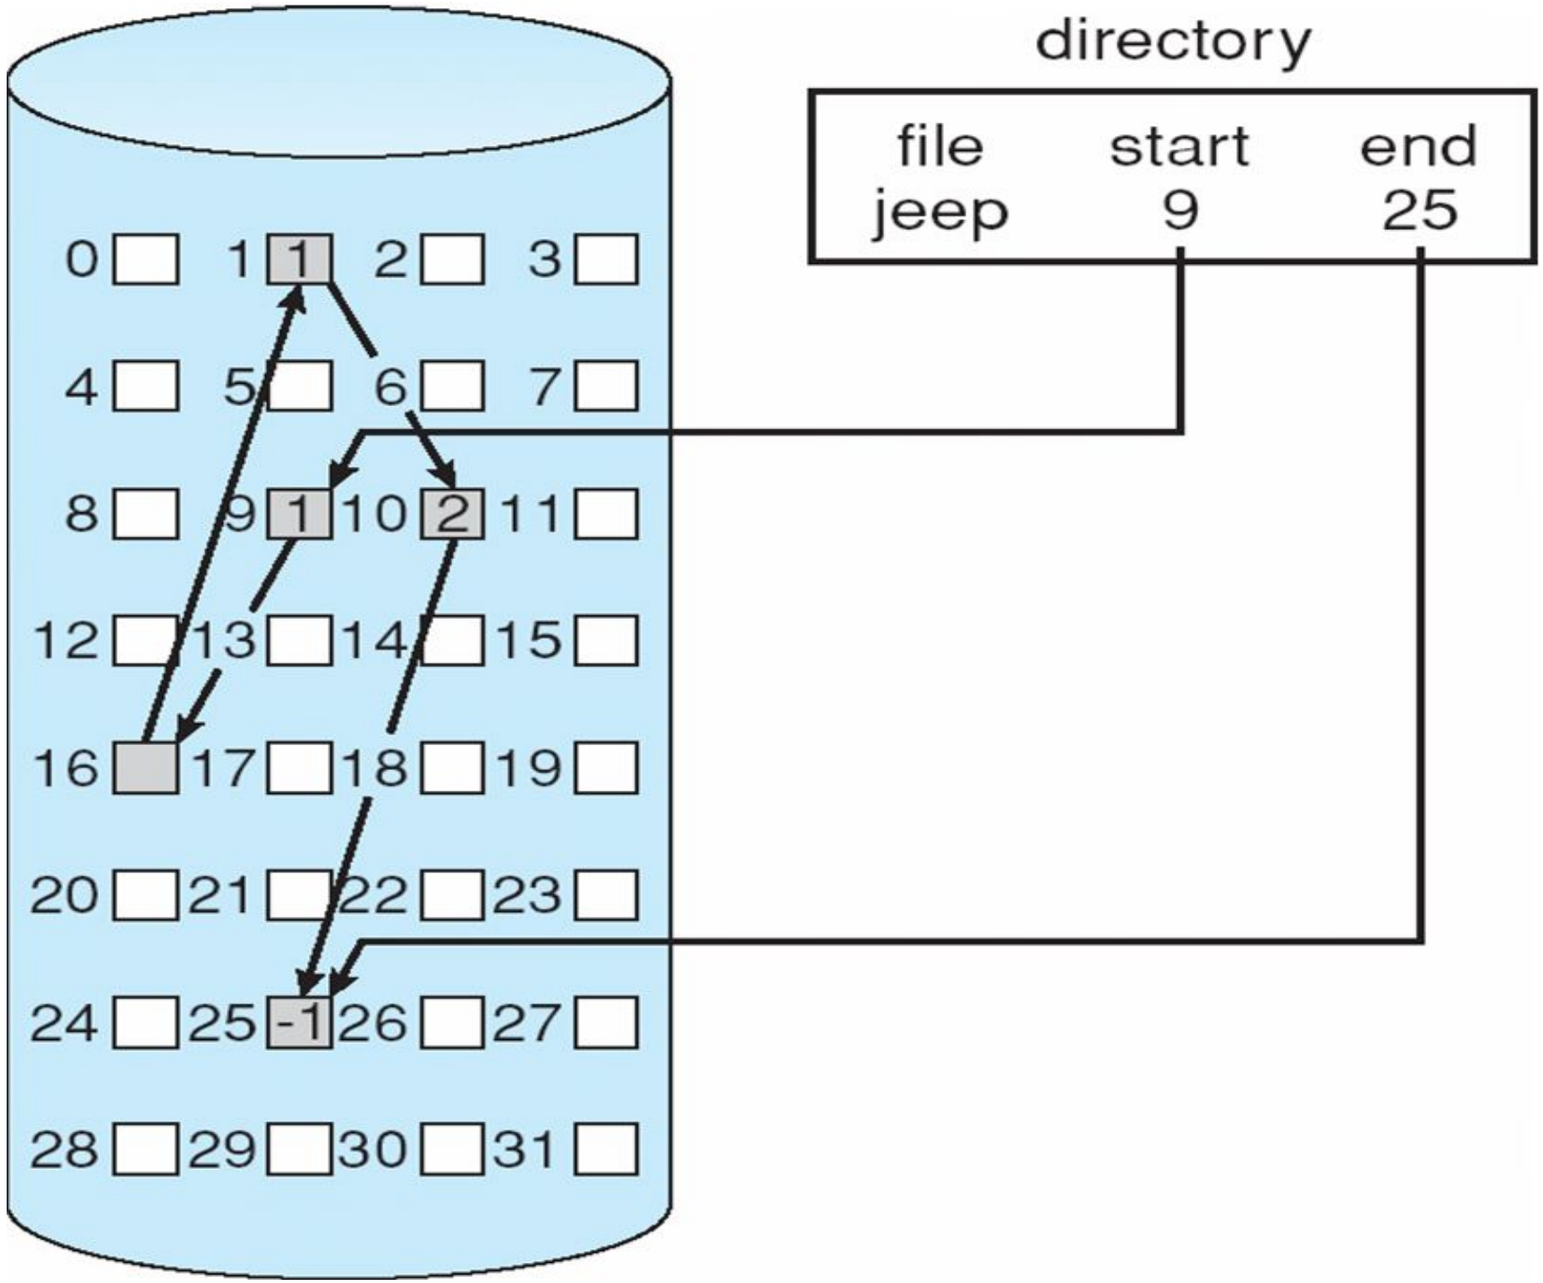

Allocation Methods - Indexed

- **Indexed allocation**
  - Each file has its own **index block**(s) of pointers to its data blocks

- Logical view

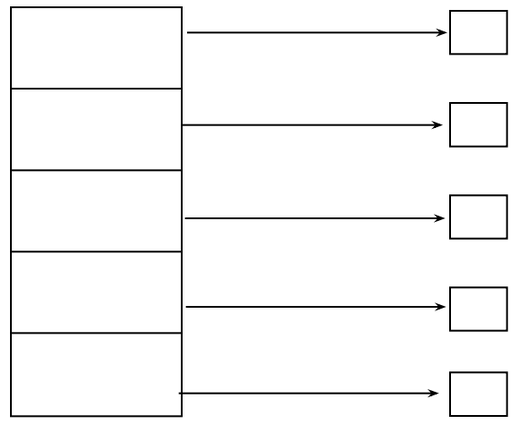

index table

Example of Indexed Allocation

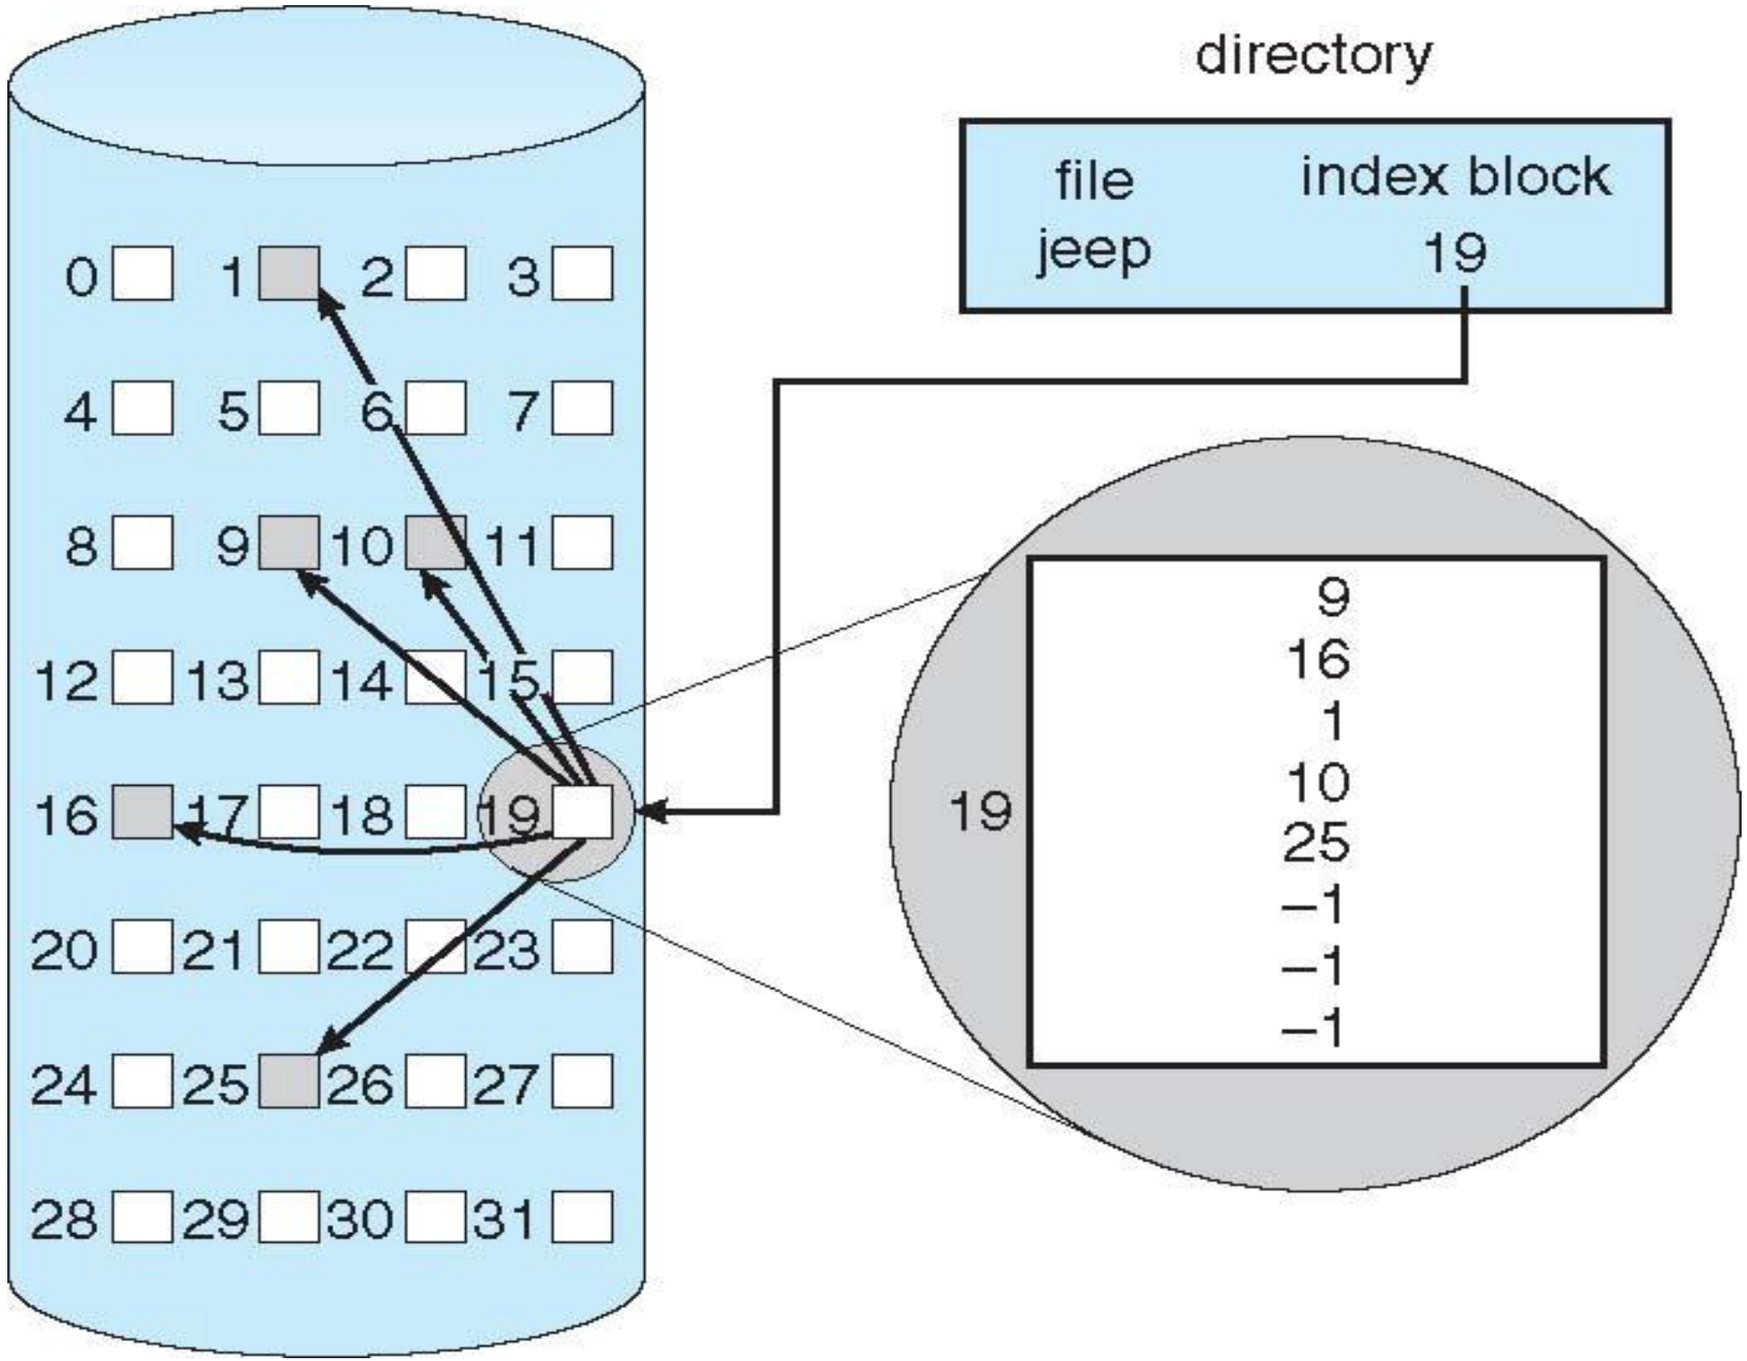

Indexed Allocation (Cont.)

- Need index table
- Random access
- Dynamic access without external fragmentation, but have overhead of index block
- Mapping from logical to physical in a file of maximum size of 256K bytes and block size of 512 bytes. We need only 1 block for index table



Q = displacement into index table
R = displacement into block

Performance

- Best method depends on file access type
  - Contiguous great for sequential and random
- Linked good for sequential, not random
- Declare access type at creation -> select either contiguous or linked
- Indexed more complex
  - Single block access could require 1 index block reads then data block read
  - Clustering can help improve throughput, reduce CPU overhead

Performance (Cont.)

- Adding instructions to the execution path to save one disk I/O is reasonable
  - Intel Core i7 Extreme Edition 990x (2011) at 3.46Ghz = 159,000 MIPS
    - http://en.wikipedia.org/wiki/Instructions_per_second
  - Typical disk drive at 250 I/Os per second
    - 159,000 MIPS / 250 = 630 million instructions during one disk I/O
  - Fast SSD drives provide 60,000 IOPS
    - 159,000 MIPS / 60,000 = 2.65 millions instructions during one disk I/O

Free-Space Management

- File system maintains **free-space list** to track available blocks/clusters
  - (Using term "block" for simplicity)
- **Bit vector** or **bit map** (*n* blocks)

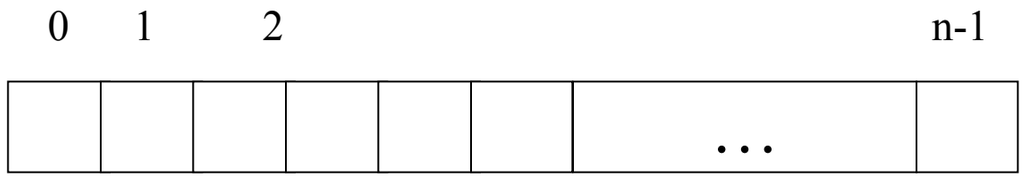

bit[*i*] = 1 ⇒ block[*i*] free

0 ⇒ block[*i*] occupied

Free-Space Management (Cont.)

- Need to protect:
  - Pointer to free list
  - Bit map
    - Must be kept on disk
    - Copy in memory and disk may differ
    - Cannot allow for block[*i*] to have a situation where bit[*i*] = 1 in memory and bit[*i*] = 0 on disk
  - Solution:
    - Set bit[*i*] = 1 in disk
    - Allocate block[*i*]
    - Set bit[*i*] = 1 in memory

Free-Space Management (Cont.)

- Bit map requires extra space
  - Example:

    block size = 4KB = 2^{12} bytes

    disk size = 2^{40} bytes (1 terabyte)

    $n = 2^{40}/2^{12} = 2^{28}$ bits (or 256 MB)

    if clusters of 4 blocks -> 64MB of memory

- Easy to get contiguous files

- Linked list (free list)
  - Cannot get contiguous space easily
  - No waste of space
  - No need to traverse the entire list (if # free blocks recorded)

Linked Free Space List on Disk

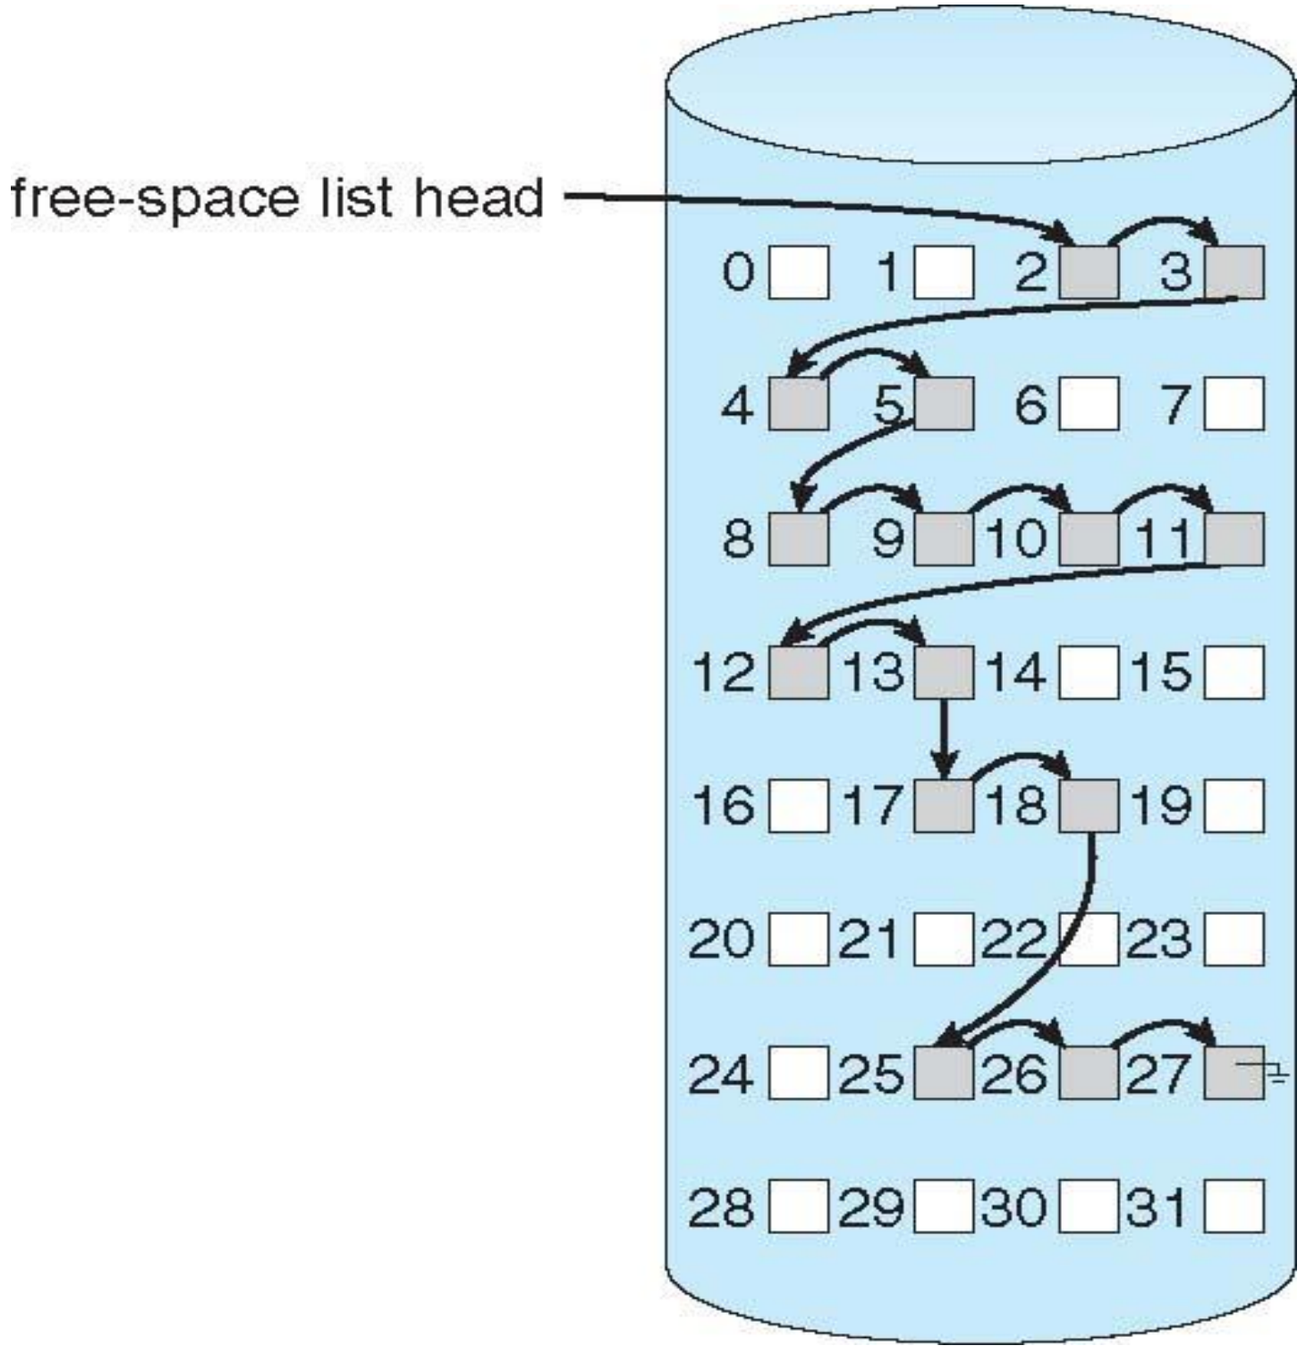

Free-Space Management (Cont.)

- Grouping
  - Modify linked list to store address of next *n-1* free blocks in first free block, plus a pointer to next block that contains free-block-pointers (like this one)

- Counting
  - Because space is frequently contiguously used and freed, with contiguous-allocation allocation, extents, or clustering
    - Keep address of first free block and count of following free blocks
    - Free space list then has entries containing addresses and counts

End of Chapter 11