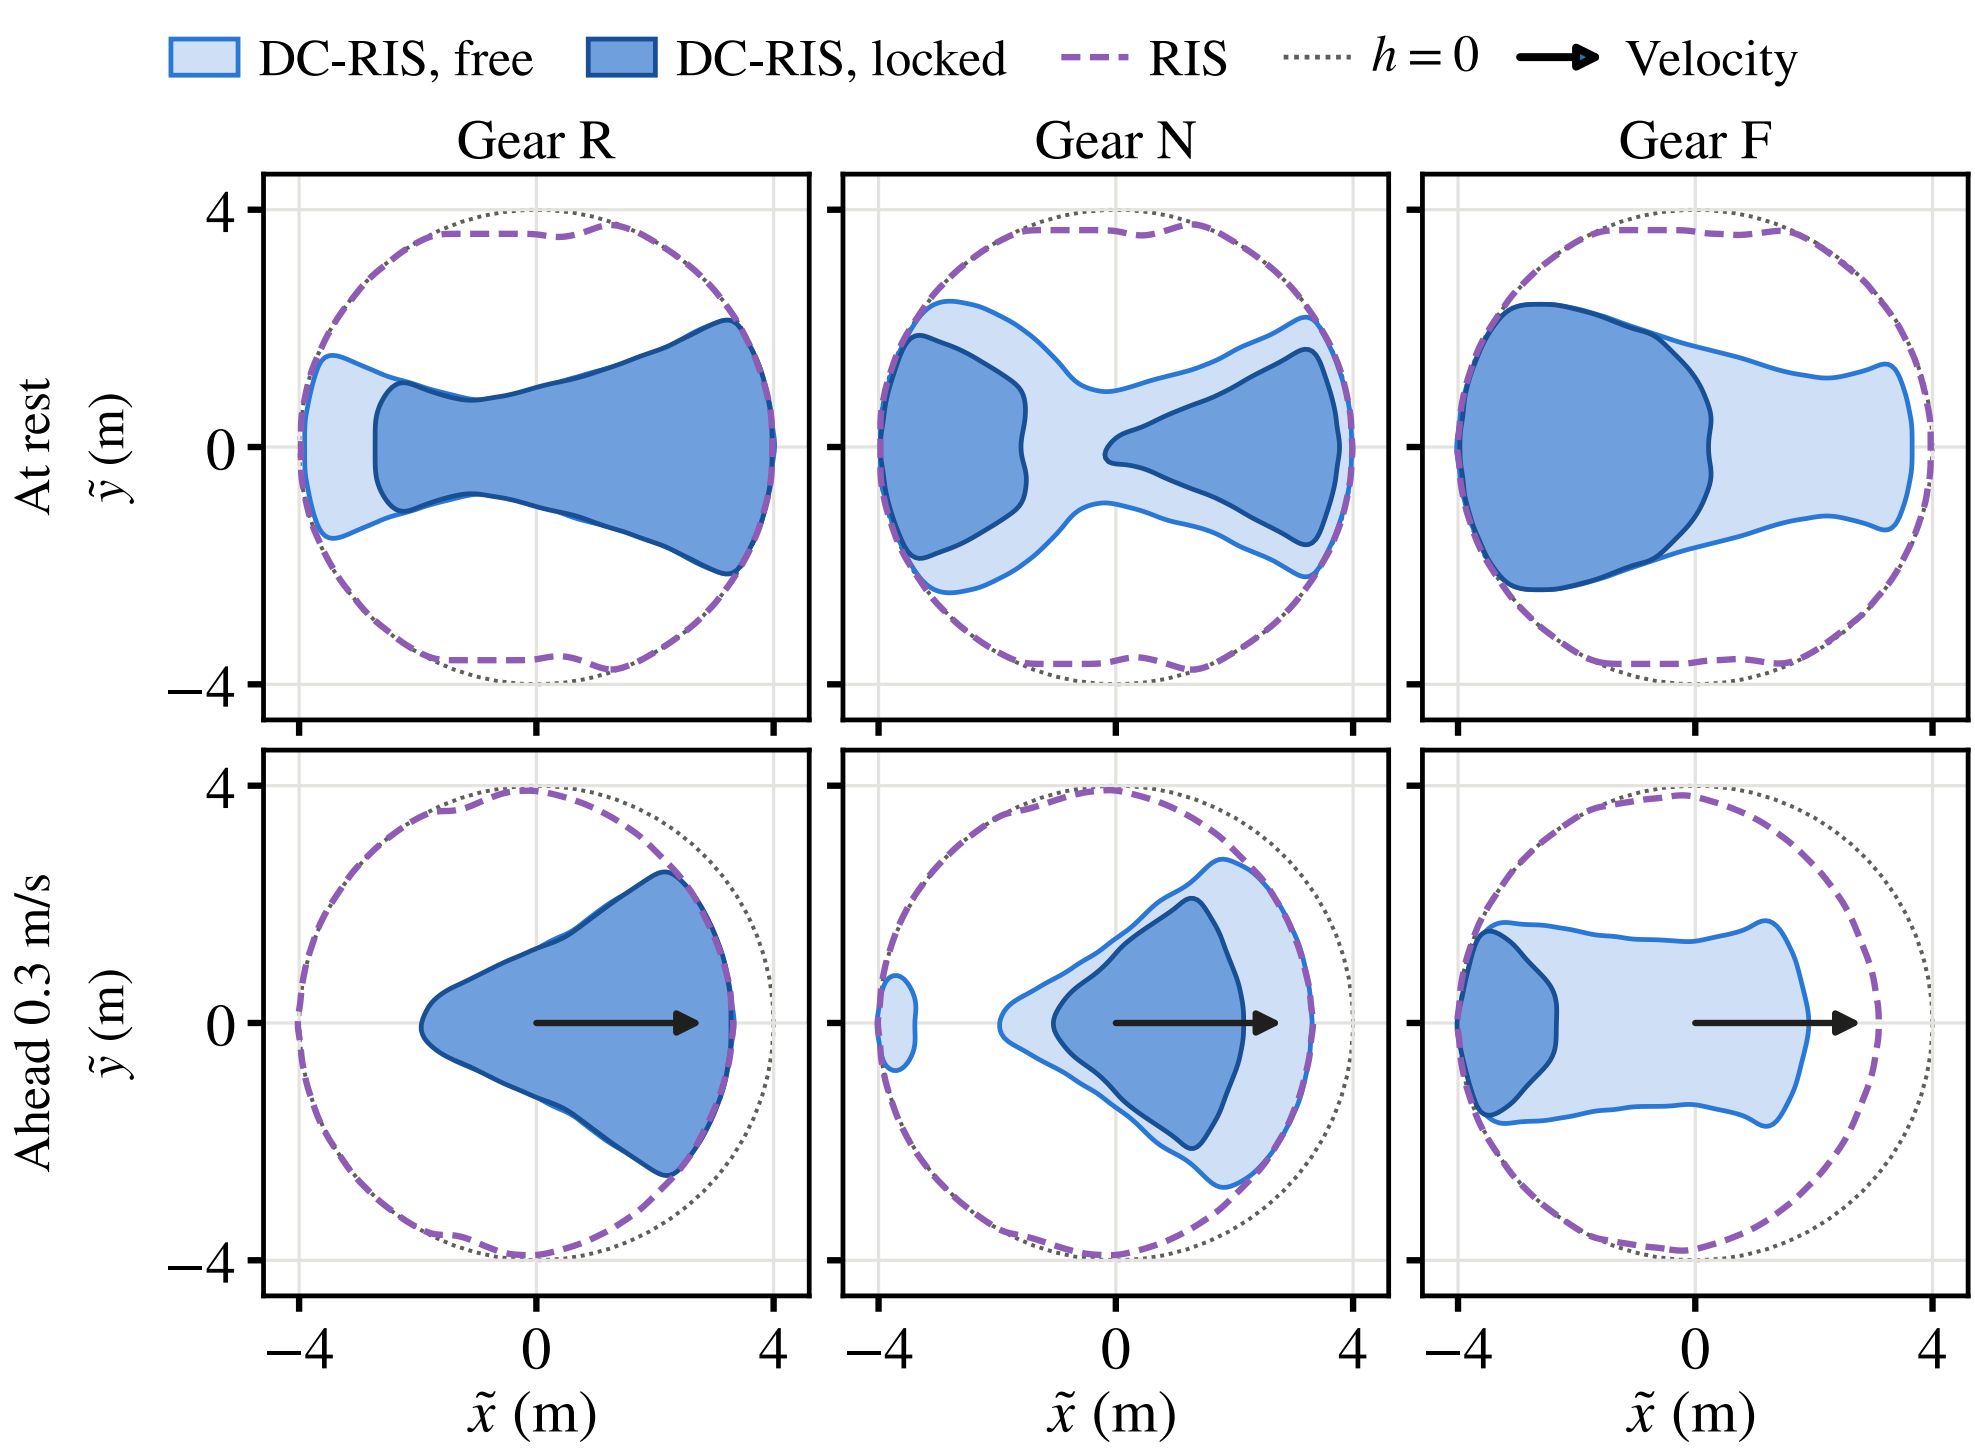

DC-RIS, free
DC-RIS, locked
RIS
$h = 0$
Velocity
Gear R
Gear N
Gear F
At rest
Ahead 0.3 m/s
$\tilde{y}$ (m)
$\tilde{x}$ (m)
4
0
−4