



PROJECT NAME: Ignite Services 3 18
CLIENT: Wildcats Flooring

WILDCATS FLOORING


Date: 27/02/2024

SUMMARY OF TAKEOFFS

Type	Mark	Description	Model	QTY	Unit	Detailed QTY	Unit
FLOOR							
Rubber	RT1	RUBBER TILE FLOORING	JOHNSONITE; MICROTONE TILE; THICKNESS; 2.0MM; SIZE; 24"X24"	9,122.00	SF	2,281.00	PCS
BASE							
Base	R	4" TOP SET RUBBER BASE	NORA; MATERIAL: RUBBER; STYLE: COVE(BASE WITH TOE); HEIGHT:4"	1,337.00	LF	1,337.00	LF
	R1	6" TOP SET RUBBER BASE	NORA; MATERIAL: RUBBER; STYLE: COVE(BASE WITH TOE); HEIGHT:6"	399.00	LF	399.00	LF
TRANSITIONS							
Transitions	TS (CONC TO RT1) @ 3.0'	CONCRETE FLOORING TO RUBBER TILE FLOORING	VERIFY SPECS	46.00	LF	46.00	LF
	TS (CONC TO ETR) @ 6.0'	CONCRETE FLOORING TO EXISTING TO REMAIN	VERIFY SPECS	13.00	LF	13.00	LF

Estimating Notes:

- QTY includes 8% wastage

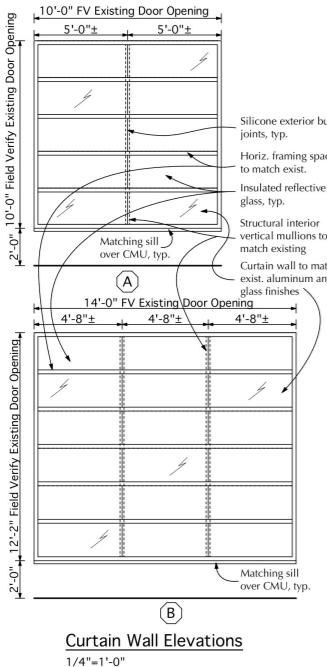

DOOR #	DOOR SIZE	FRAME DETAILS						LABEL	HRDW	See Legend & Frame Types also
		MAT.	MAT.	TYPE	HEAD	JAMB	SILL			
120	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3	01	
120.1	3'-0" x 7'-0" x 1 3/4"	WD	G	HM	1	A/3	A/3	2/3		
120.2	Borrowed Lite	-	-	HM	3	2/3	2A/3	2A/3		
120A	3'-0" x 7'-0" x 1 3/4"	WD	F	HM	6	A/3	A/3	-		
120A.1	3'-0" x 7'-0" x 1 3/4"	WD	F	HM	6	A/3	A/3	-		
121	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
121.1	3'-0" x 2A/3	WD	G	HM	3	2A/3	2A/3	2A/3		
121.2	3'-0" x 7'-0" x 1 3/4"	HM	F	HM	6*	E/3	E/3	-		*4" Head
121A	(2) 3'-0" x 7'-0" x 1 3/4"	WD	F	HM	4	A/3	A/3	-		
122	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
122.1	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	3	2/3	A/3	2/3		
122.2	Borrowed Lite	-	-	HM	3	2A/3	2A/3	2A/3		
123	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
123.1	Borrowed Lite	-	-	HM	3	2A/3	2A/3	2A/3		
124	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
124.1	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
124.2	Borrowed Lite	-	-	HM	3	2A/3	2A/3	2A/3		
125	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
125.1	Borrowed Lite	-	-	HM	3	2A/3	2A/3	2A/3		
126	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
126.1	3'-0" x 7'-0" x 1 3/4"	HM	F	HM	6*	E/3	E/3	-		*4" Head
126.2	Borrowed Lite	-	-	HM	3	2A/3	2A/3	2A/3		
127	3'-0" x 7'-4" x 1 3/4"	WD	G	HM	1	2/3	A/3	2/3		
127.1	Borrowed Lite	-	-	HM	3	2A/3	2A/3	2A/3		
C1	3'-0" x 7'-0" x 1 3/4" (Exist.)	-	-	-	-	-	-	-		
C1.1	(2) 3'-0" x 7'-0" x 5/8"	AG	AG	SS*	6/3	F/3	6/3			*Stainless steel patches, etc.
C1.2	(2) 3'-0" x 7'-4" x 1 3/4"	AL	G	AL	5	4/3	B/3	4/3		
V1	3'-0" x 7'-0" x 1 3/4"	HM	F	HM	6	A/3	A/3	-		

DOOR SCHEDULE ABBREVIATIONS AND NOTES:										
HM Hollow metal										AG All Glass
WD Wood										AL Aluminum
1. Coordinate door undercuts w/ thresholds & floor finish thicknesses prior to ordering doors so that they are correct height to properly contact threshold & to clear floor finish.										
2. All hollow metal frames shall be mitered, fully welded and ground smooth, ready for finish painting.										
3. Apply sealant @ perimeter of frames, each side (fire rated sealant @ all rated doors)										

3/16" = 1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0"

1/4"=1'-0