The diagram below shows the recycling process of aluminium cans.

Summarie the information by selecting and reporting the main features, and make comparisons where relevant.

Write at least 150 words.

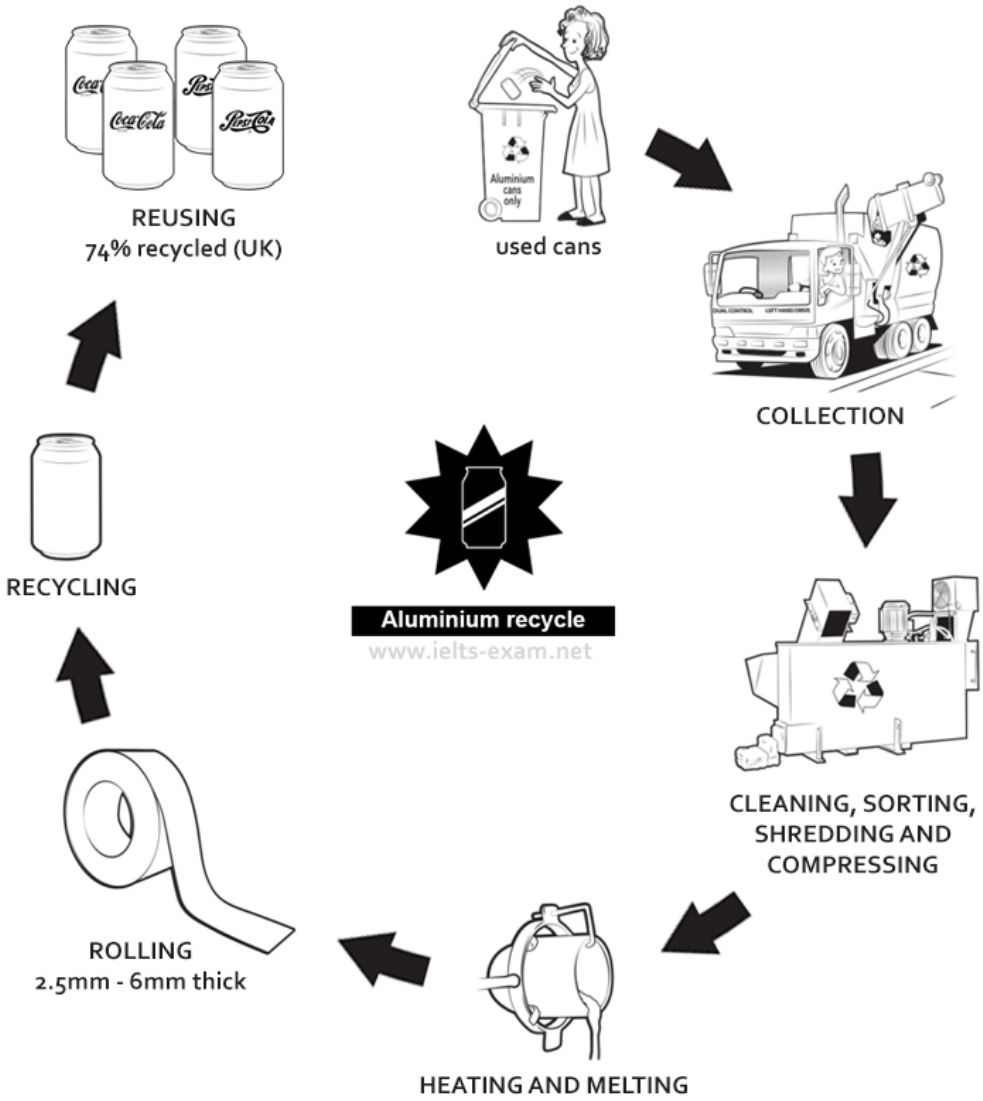

Model answer

The diagram illustrates how aluminium cans are recycled. First, the cans need to be taken to special collection centres instead of being thrown away with the normal refuse. The cans

are collected from here and taken to a factory where they are first sorted and then cleaned. Next, the cans are shredded and crushed in a special machine.

The metal is then heated to a high enough temperature to allow the aluminium to melt. It is then rolled out flat to a thickness of between 2.5mm and 6 mm, depending on what it is going to be used for. The aluminium is now ready to be recycled into new packaging, such as drink containers. Finally, the new cans are delivered to a soft drinks factory where they are filled. The cans can now be sold to the public and reused. In the UK, 74 per cent of all aluminium cans that are sold are recycled.

2. You should spend about 20 minutes on this task.

The diagram illustrates the process that is used to manufacture bricks for the building industry.

Summarise the information by selecting and reporting the main features and make comparisons where relevant.

Write at least 150 words.

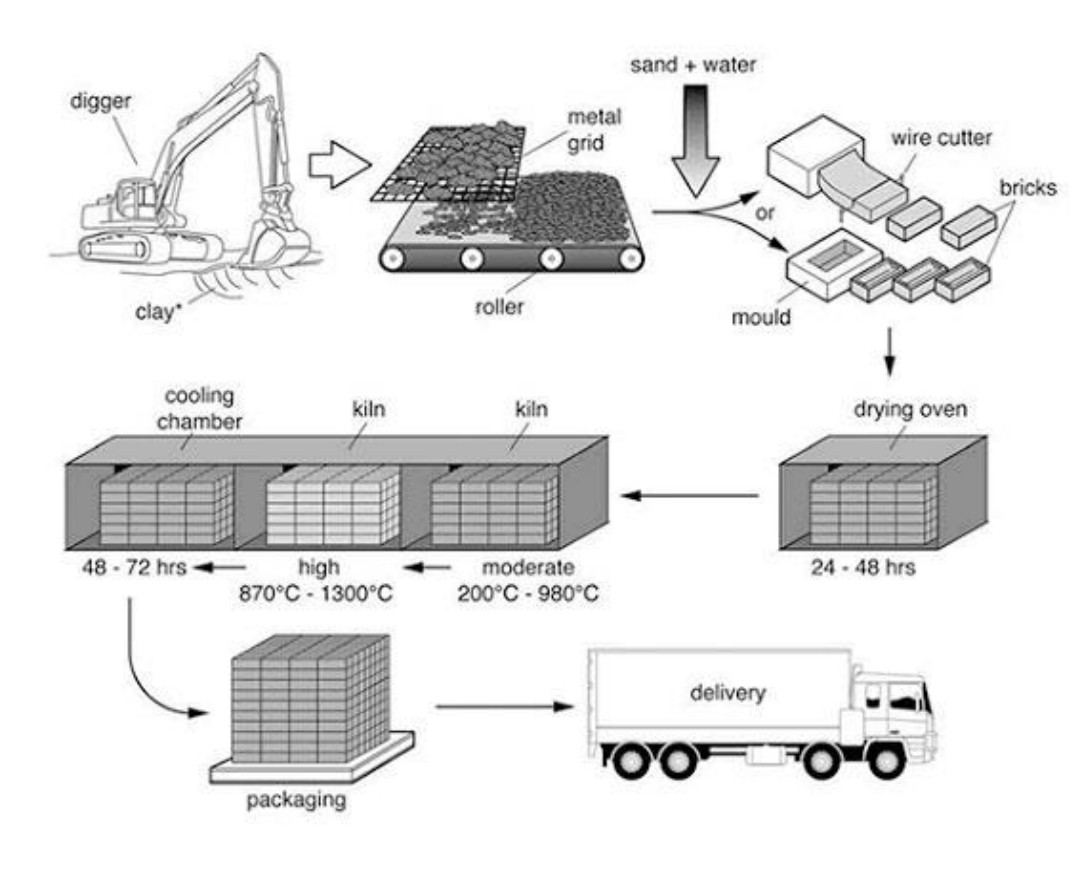

The Brick Manufacturing Process

Process Model Answer

The diagram explains the way in which bricks are made for the building industry. Overall, there are seven stages in the process, beginning with the digging up of clay and culminating in delivery.

To begin, the clay used to make the bricks is dug up from the ground by a large digger. This clay is then placed onto a metal grid, which is used to break up the clay into smaller pieces. A roller assists in this process.

Following this, sand and water are added to the clay, and this mixture is turned into bricks by either placing it into a mould or using a wire cutter. Next, these bricks are placed in an oven to dry for 24 – 48 hours.

In the subsequent stage, the bricks go through a heating and cooling process. They are heated in a kiln at a moderate and then a high temperature (ranging from 200c to 1300c), followed by a cooling process in a chamber for 2 – 3 days. Finally, the bricks are packed and delivered to their destinations.

3. The diagram below shows the manufacturing process for making sugar from sugar cane.

Summarise the information by selecting and reporting the main features, and make comparisons where relevant.

Write at least **150** words.

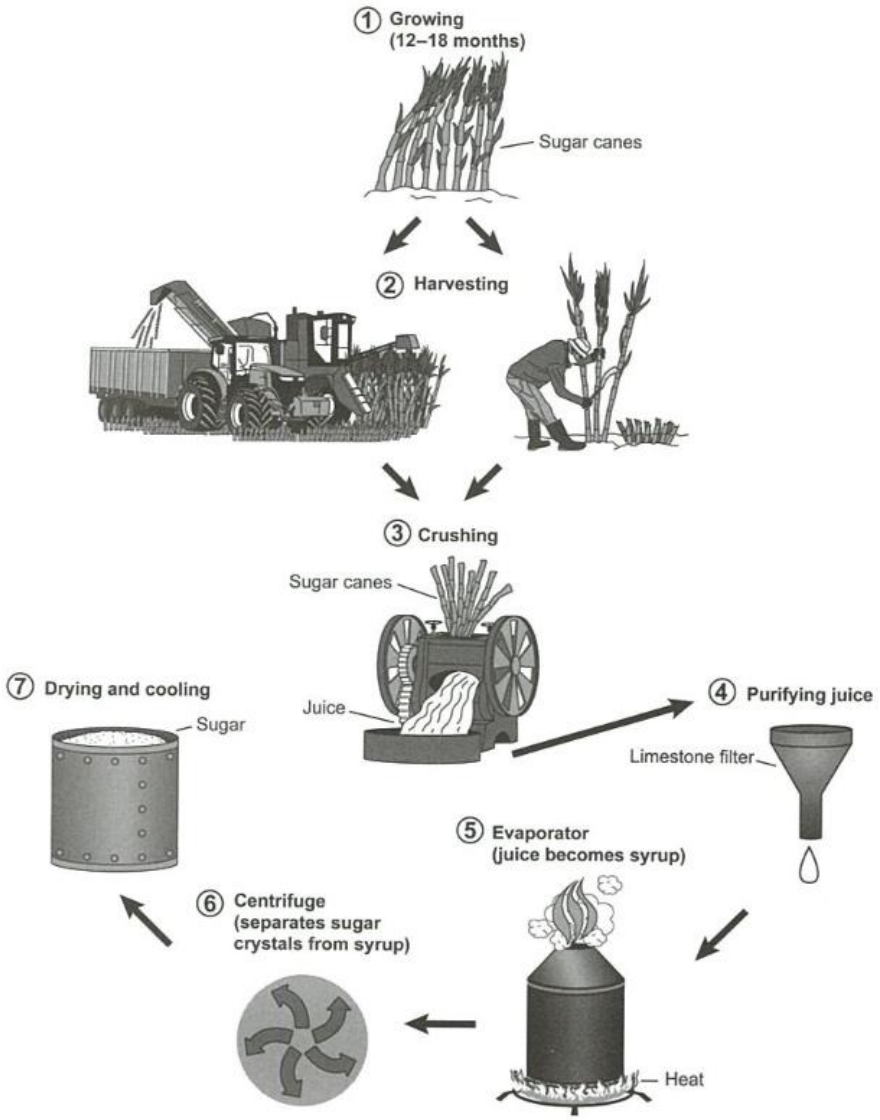

Model Answer 1:

The illustration outlines different steps of producing sugar from sugar cane. As is clearly delineated in the diagram, sugar cane plants get ready to be processed for manufacturing sugar when they are over one year old, and the process involves harvesting, crushing, making syrup, centrifuging, and finally drying and colling.

As the diagram depicts, sugar cane plants are harvested from the fields when they are at least one to one and a half years old for the purpose of making sugar from them. They are harvested either manually by human labourers or by using

machines. In the third step, these sugar canes are crushed in a crusher machine to produce juice. Afterwards, the produced juice is purified by a limestone filter before the juice is heated by an evaporator to create the syrup. Sugar crystal is separated from the syrup in a device called a centrifuge. The final step involves drying and cooling the produced sugar crystals to make the sugar that we consume.