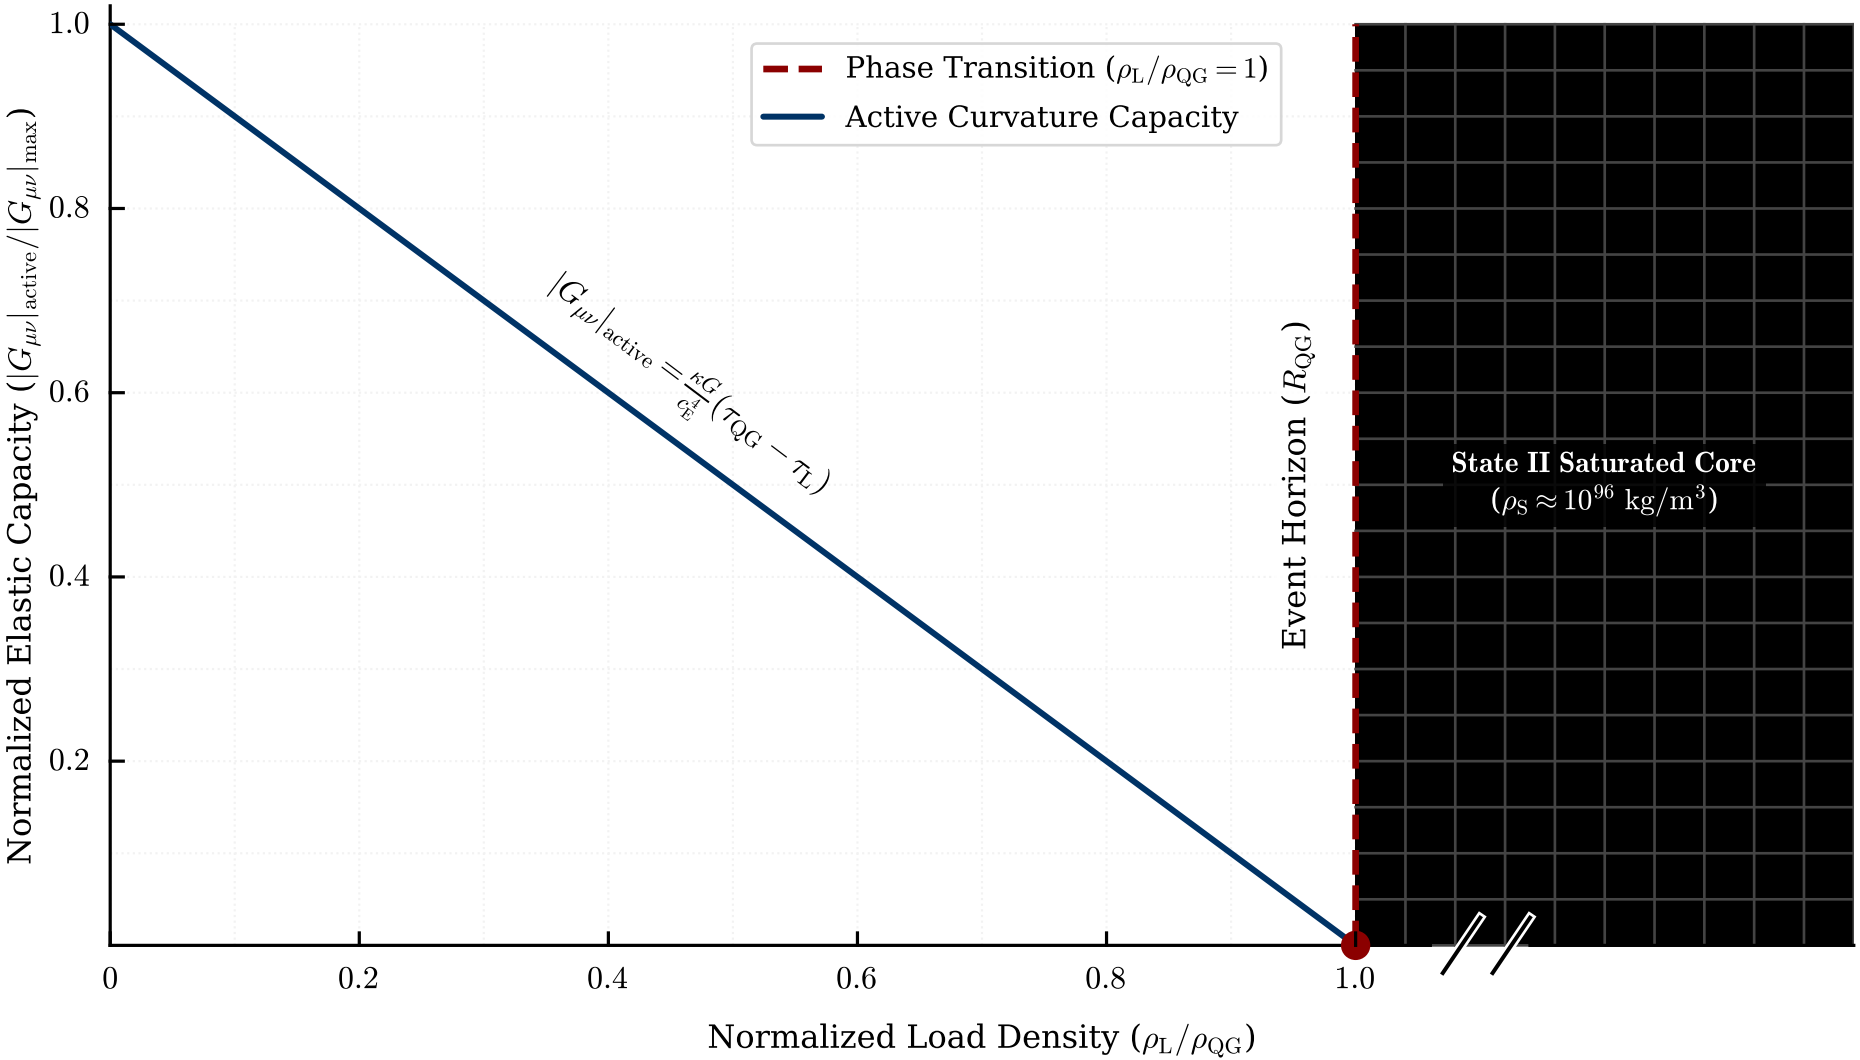
Phase Transition ($\rho_L/\rho_{QG} = 1$)
Active Curvature Capacity
$|G_{\mu\nu}|_{active} = \frac{\kappa G_L}{c_E^4}(\tau_{QG} - \tau_L)$
Event Horizon (R_{QG})
State II Saturated Core
($\rho_S \approx 10^{96}$ kg/m^3)
Normalized Elastic Capacity ($|G_{\mu\nu}|_{active}/|G_{\mu\nu}|_{max}$)
Normalized Load Density (ρ_L/ρ_{QG})
1.0
0.8
0.6
0.4
0.2
0
0.2
0.4
0.6
0.8
1.0