



CAR DETECTION SENSOR



This is a manual describing the SP3 detector. You can find this manual in electronic format on the Circontrol web: www.circontrol.com

 Before performing any maintenance, repair or handling of any of the connections of the equipment, must disconnect the device from any power source and also the connection of measurement. When you suspect a malfunction of the equipment please contact the service. The design of the equipment allows a quick replacement in case of failure.

 If the equipment is used in a way not specified by the manufacturer, the protection guaranteed by the equipment may be compromised.

DESCRIPTION

The ultrasound sensor detects the vehicle presence in a car place. It includes a place state luminous indicator.

COMMUNICATION PROTOCOL

The connection between the modules and the system elements is carried out through a communications bus RS-485. The communication speed, by default, is 19200, 8, N, 1.

TECHNICAL CHARACTERISTICS

Power supply

Power supply	+24 Vdc +/- 10%
Consumption SP3	0,8 W
Consumption SP3-RG	1,2 W
Consumption SP3-RB	1,2 W

Serial interface

Interface	RS-485
Speed	19200, 8, N, 1

Environmental conditions

Working temperature	-10 °C to +50 °C
Degree of protection	IP44


Dimensions

Dimensions	Ø 100mm ; H: 44 mm
------------	--------------------


Mechanical characteristics

Box type	Polycarbonate self-extinguish
----------	-------------------------------


4 INSTALLATION

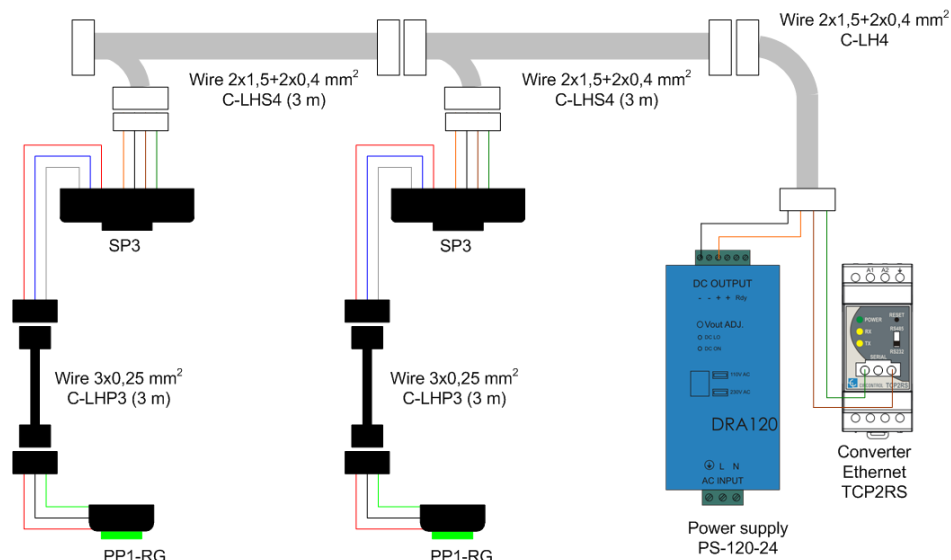

5 WIRING

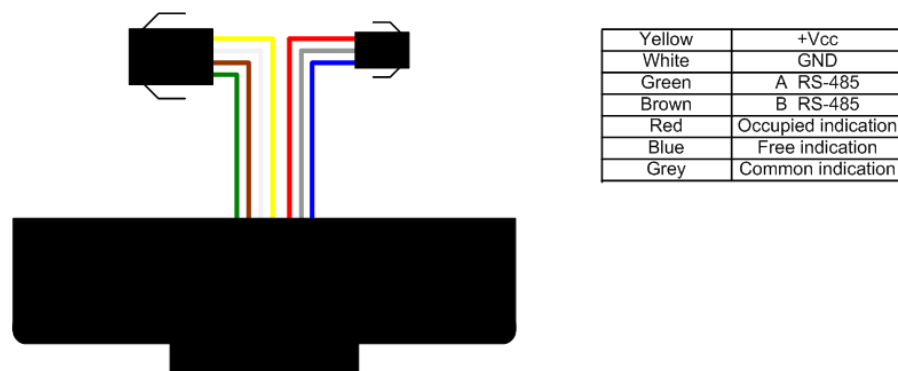

6 DIMENSIONS

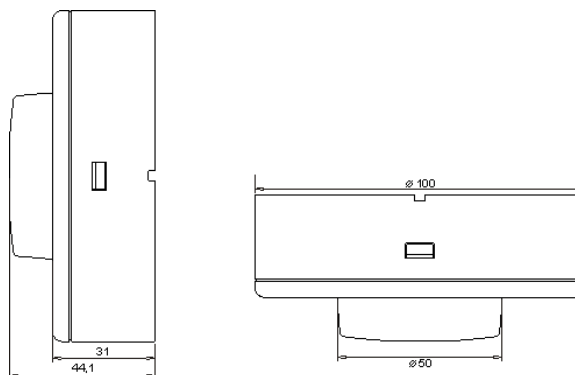

7 SERVICE SUPPORT

In the event that operation or damage, call for technical service of **CIRCONTROL, S.A.**

CIRCONTROL, S.A. – After sales service
Innovació, 3 (Industrial Park Can Mitjans)
08232 Viladecavalls

Tel: (+34) 93 736 29 40
Fax: (+34) 93 736 29 41
Web: www.circontrol.com
E-mail: ps-support@circontrol.com