

Unit Light

SKU:U021



Description

Unit Light is a light intensity detection sensor. It integrates a photoresistor and a 10K adjustable resistor, capable of detecting light intensity and setting a light intensity threshold. The resistance of the photoresistor decreases as the incident light intensity increases, thus detecting the change in voltage, and obtaining light intensity data through AD conversion. To achieve more accurate light intensity measurements, this Unit also adopts the **LM393** dual differential comparator, used to compare the differential voltage between the photoresistor and the varistor.

Features

- Differential voltage design
- Analog and digital output
- Development Platform: Arduino, UIFlow
- 2 x LEGO compatible holes

Includes

- 1 x Unit Light
- 1 x HY2.0-4P Grove Cable (20cm)

Applications


- Light-controlled switch
- Solar yard lamp
- Infrared surveillance camera

Specifications

Specification	Parameter
Adjustable Resistor	10K
Product Size	32.0 x 24.0 x 8.0mm
Product Weight	4.6g
Package Size	138.0 x 93.0 x 9.0mm
Gross Weight	10.0g

Schematics

- [Unit Light Schematics PDF](#)

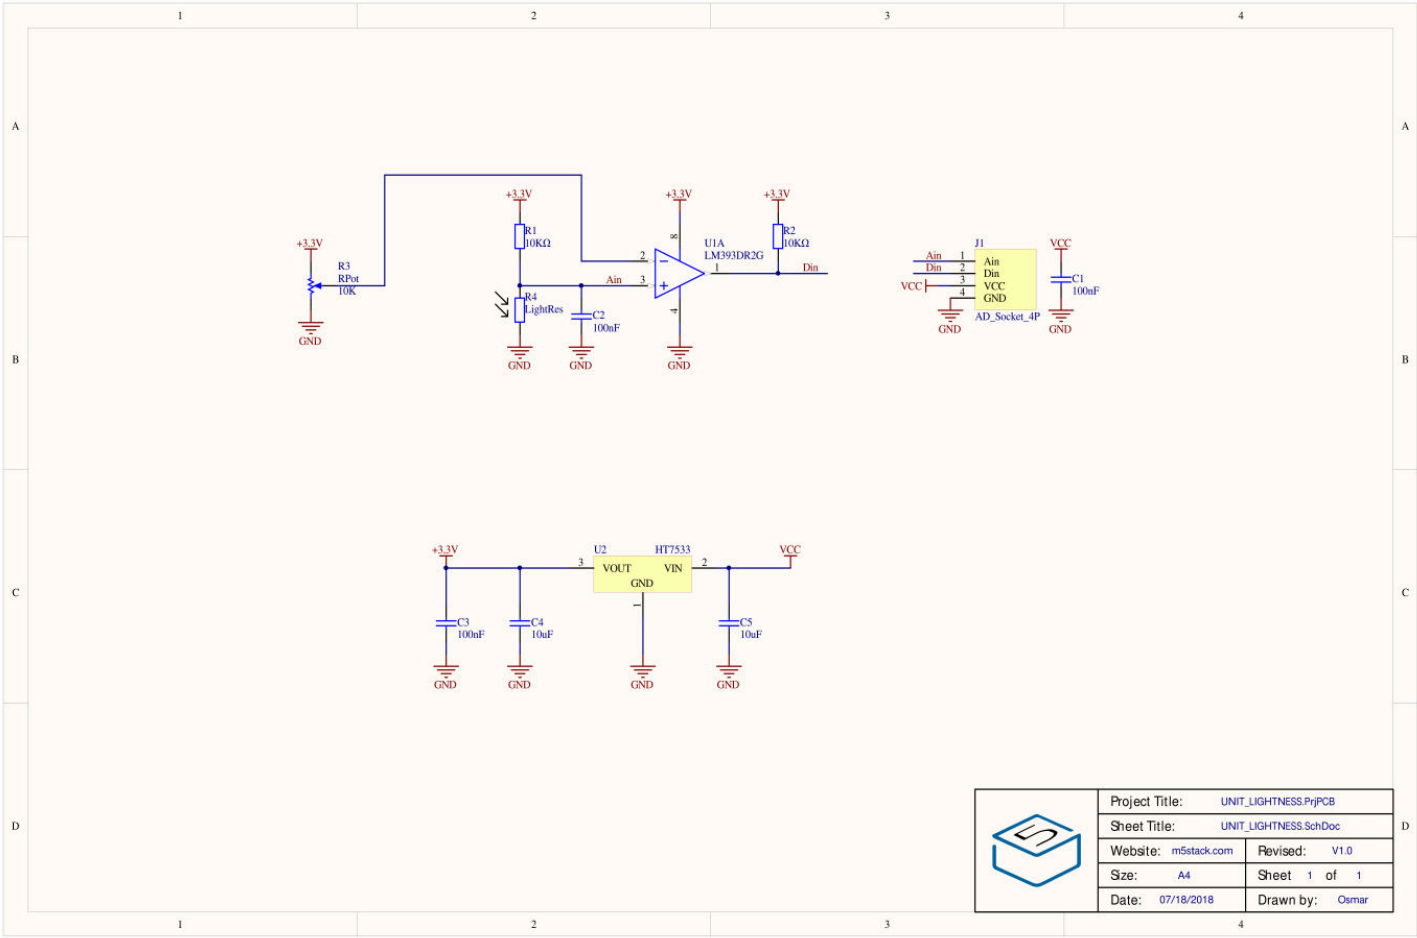


PinMap

Unit Light

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	Digital Output	Analog Output

Model Size

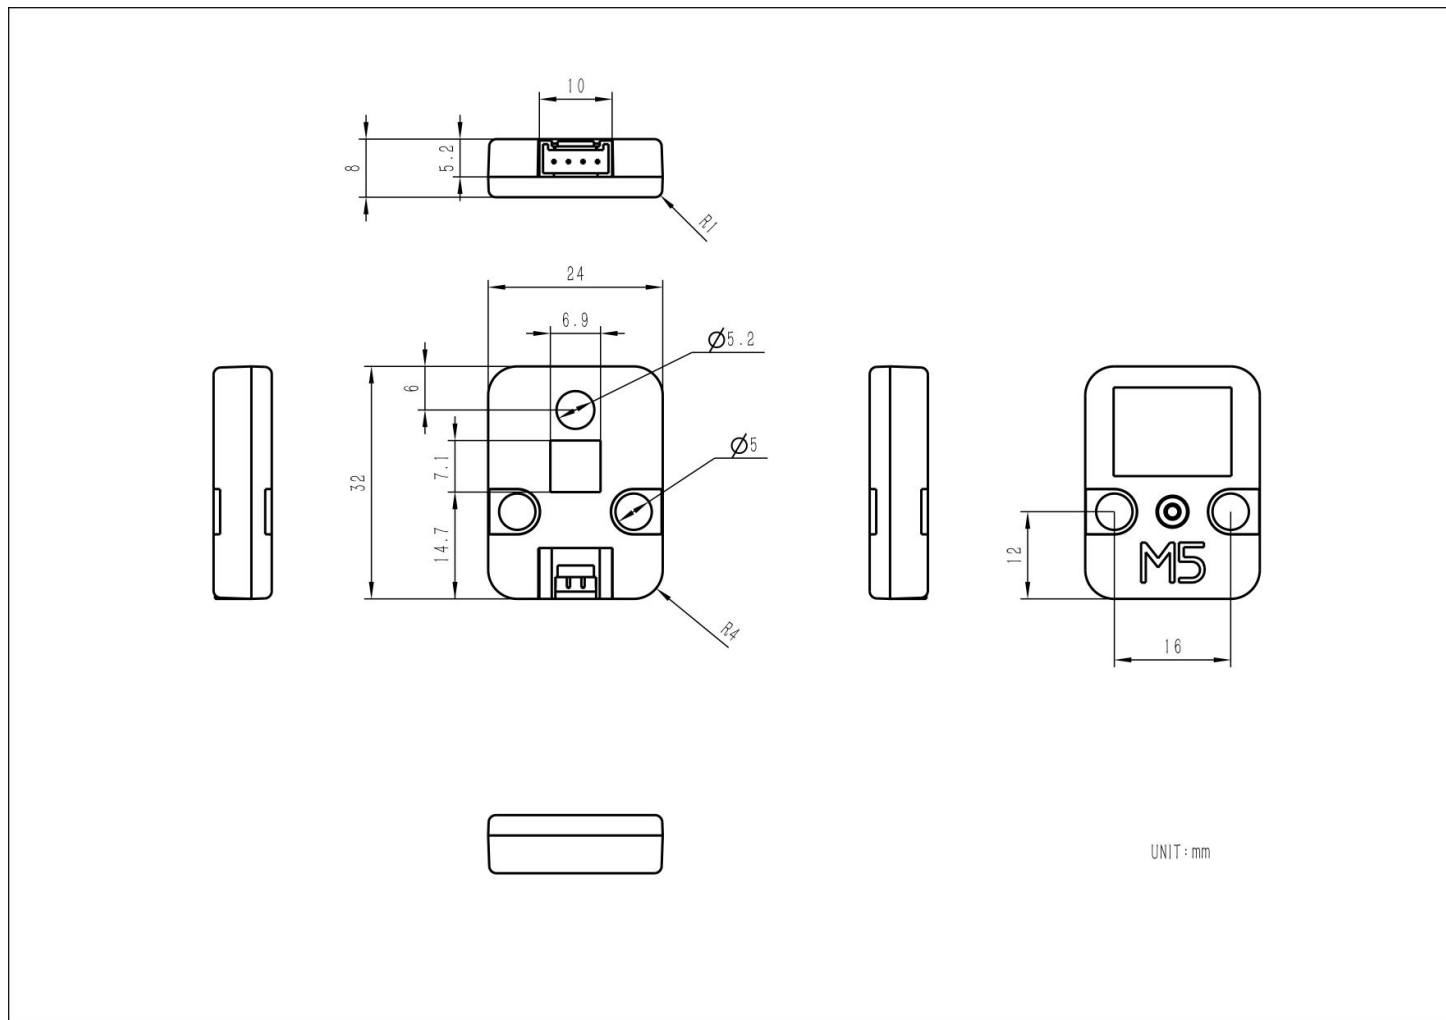

Structure

- Unit Light Structure Files

Softwares

Arduino

- Unit Light Arduino Tutorial

UiFlow2

- Unit Light UiFlow2 Docs

Easyloader

Easyloader	Download	Note
Unit Light Test Example Easyloader	download	/

Video

- [Light_UNIT.mp4](#)
- [m5stack iot lighting part 2 - light sensor control.mp4](#)