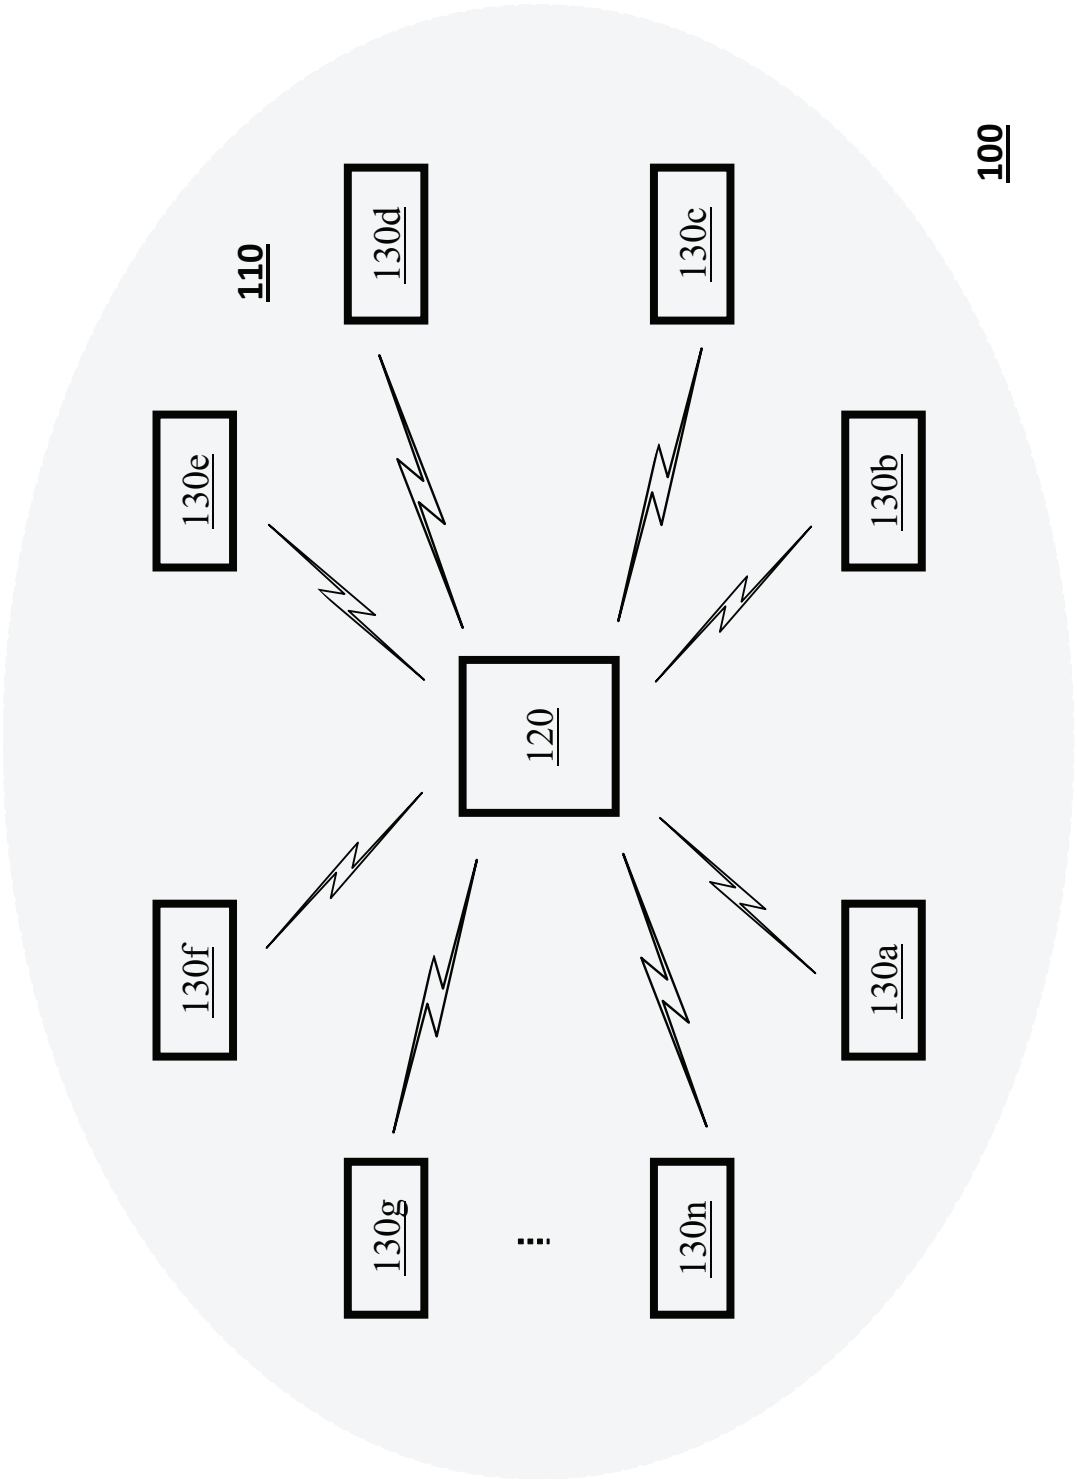


Fig. 1

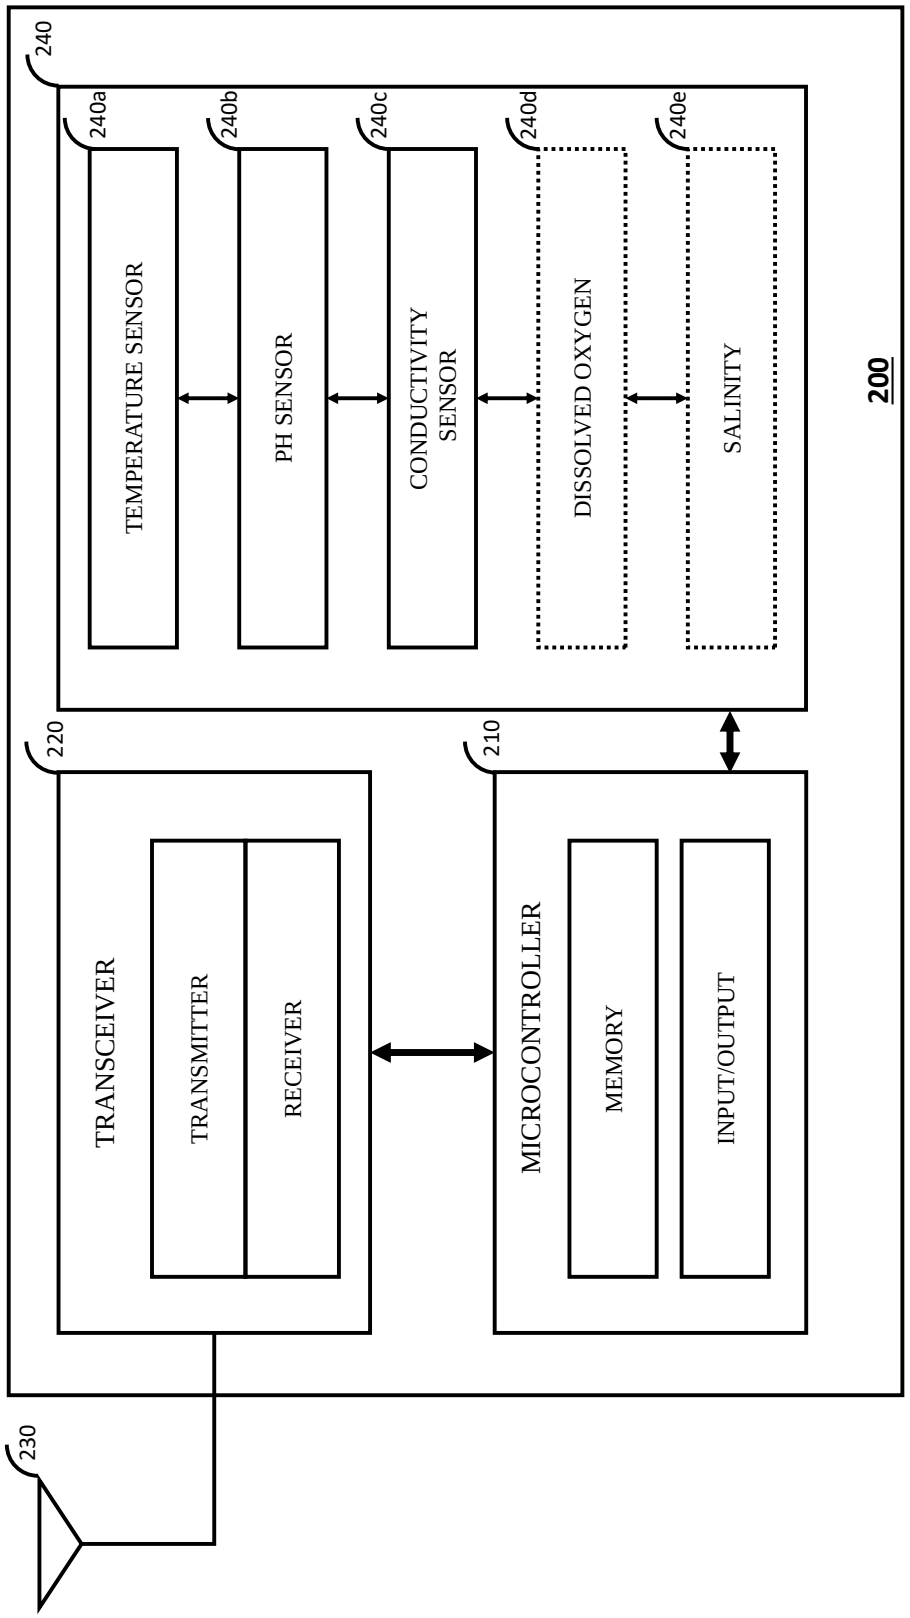

240
240a
240b
240c
240d
240e
TEMPERATURE SENSOR
PH SENSOR
CONDUCTIVITY SENSOR
DISSOLVED OXYGEN
SALINITY
200
220
210
TRANSCEIVER
TRANSMITTER
RECEIVER
MICROCONTROLLER
MEMORY
INPUT/OUTPUT
230

Fig. 2

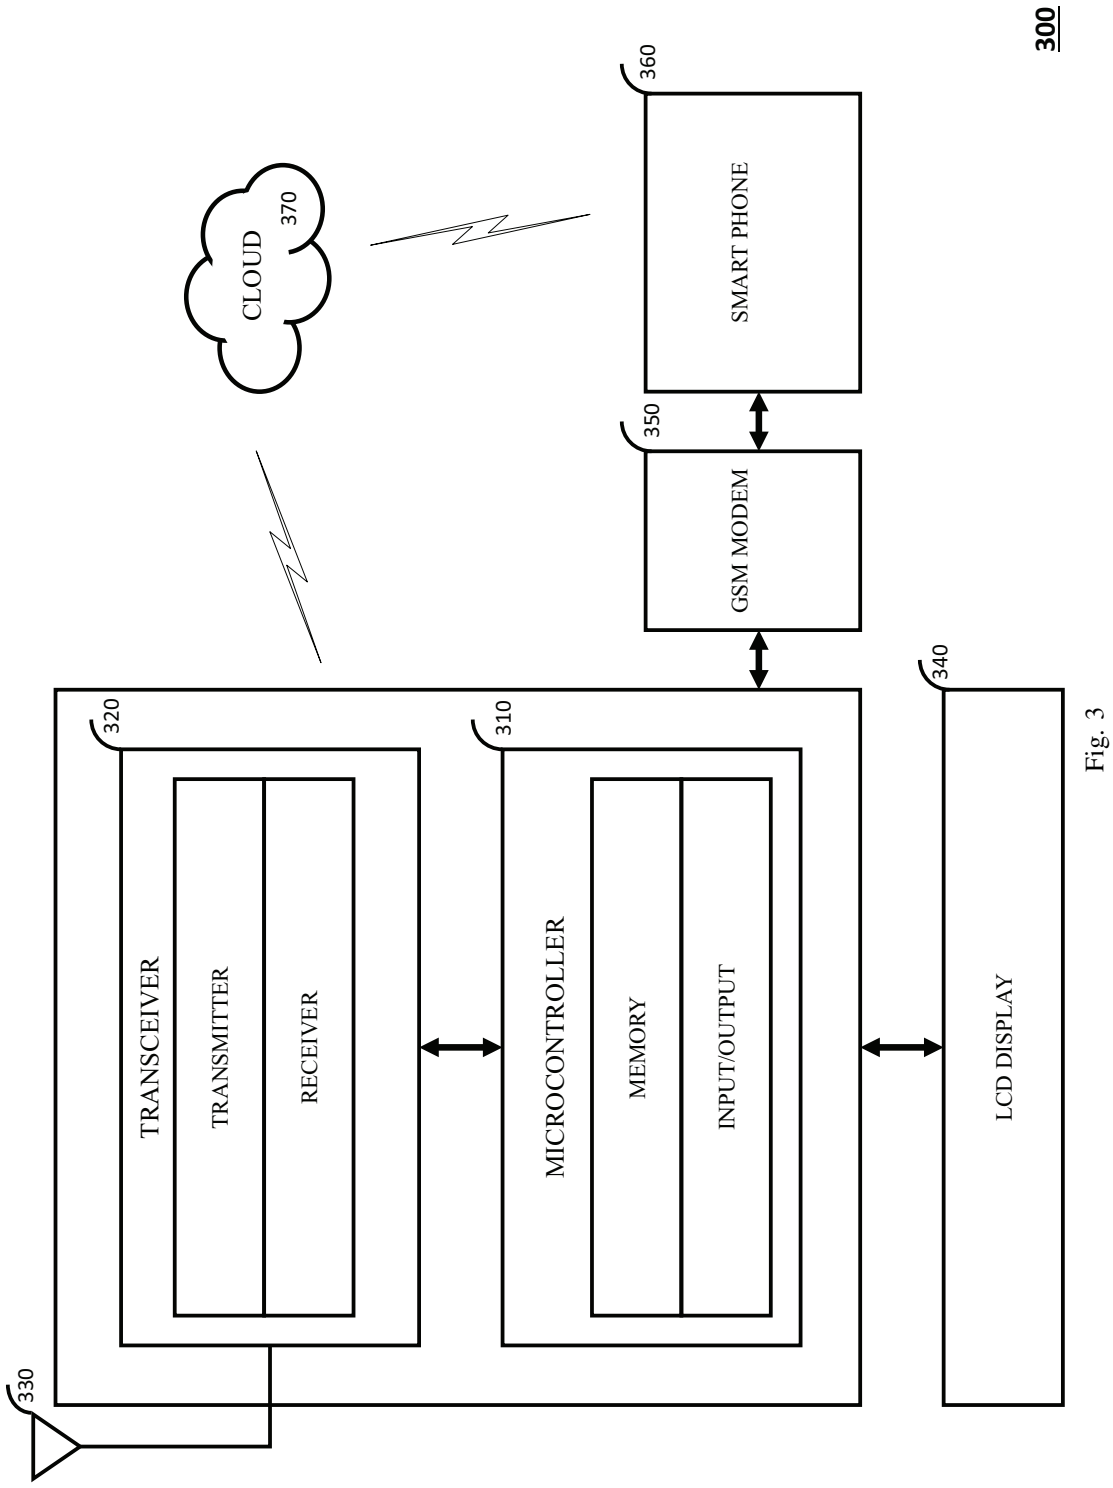

300
360
SMART PHONE
370
CLOUD
350
GSM MODEM
340
320
310
TRANSCEIVER
TRANSMITTER
RECEIVER
MICROCONTROLLER
MEMORY
INPUT/OUTPUT
LCD DISPLAY
330

Fig. 3

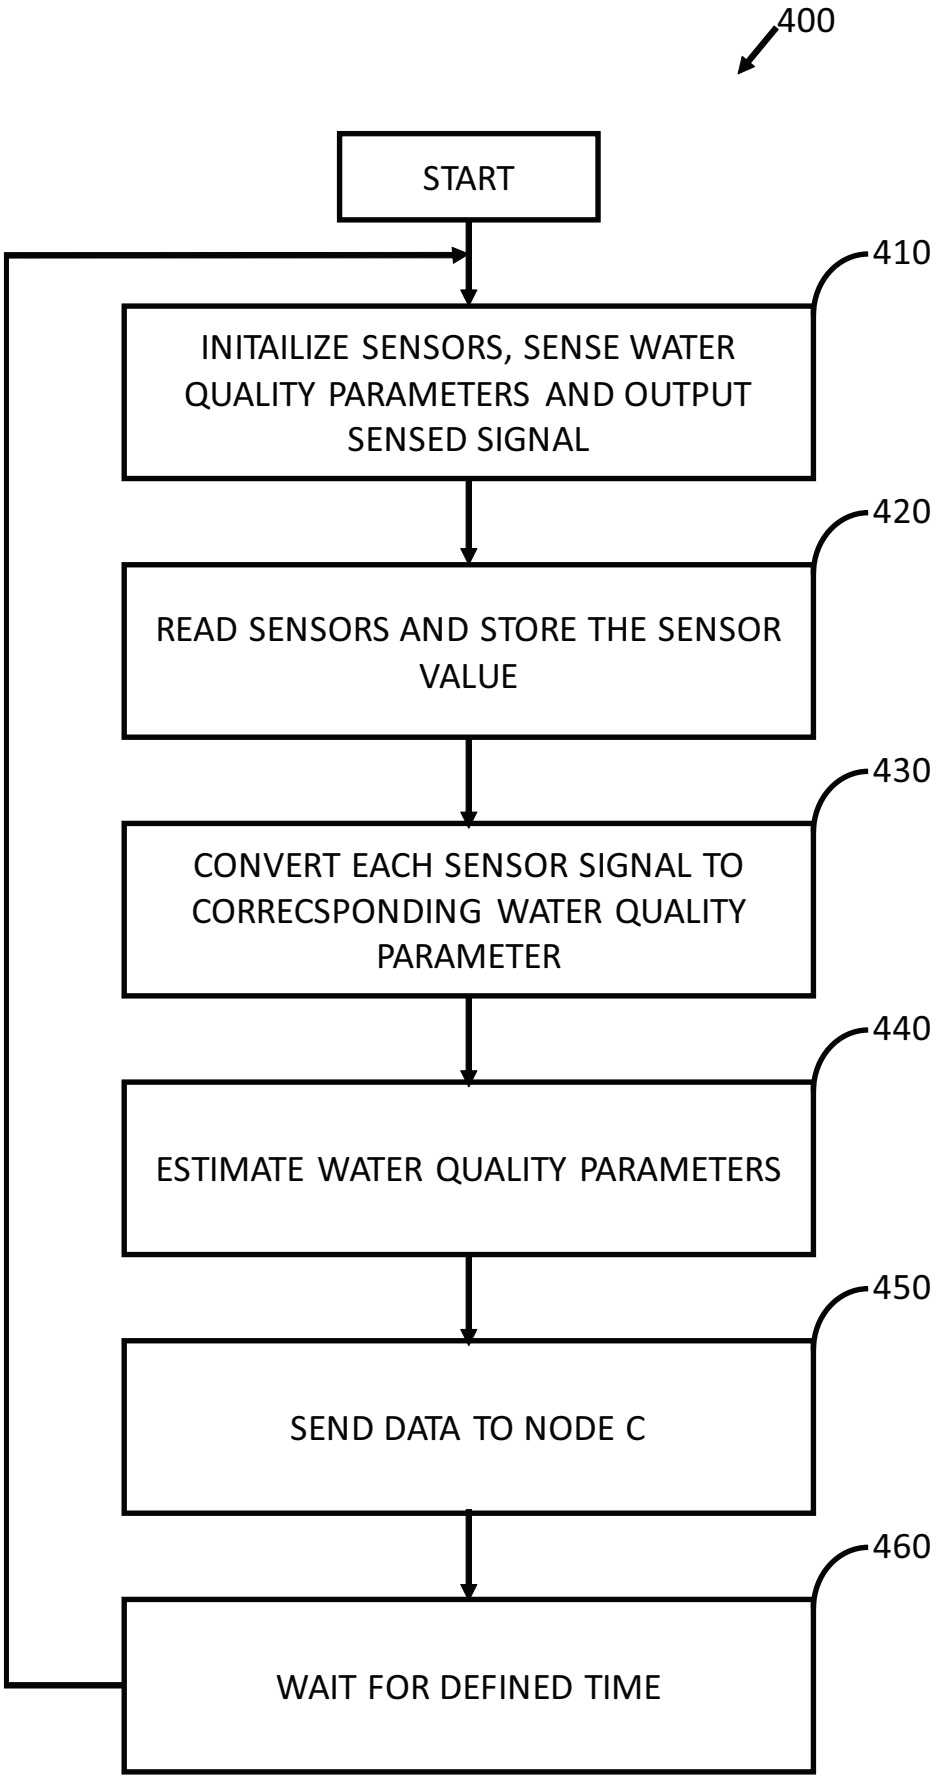

400
START
410
INITAILIZE SENSORS, SENSE WATER QUALITY PARAMETERS AND OUTPUT SENSED SIGNAL
420
READ SENSORS AND STORE THE SENSOR VALUE
430
CONVERT EACH SENSOR SIGNAL TO CORRECSPONDING WATER QUALITY PARAMETER
440
ESTIMATE WATER QUALITY PARAMETERS
450
SEND DATA TO NODE C
460
WAIT FOR DEFINED TIME

Fig. 4

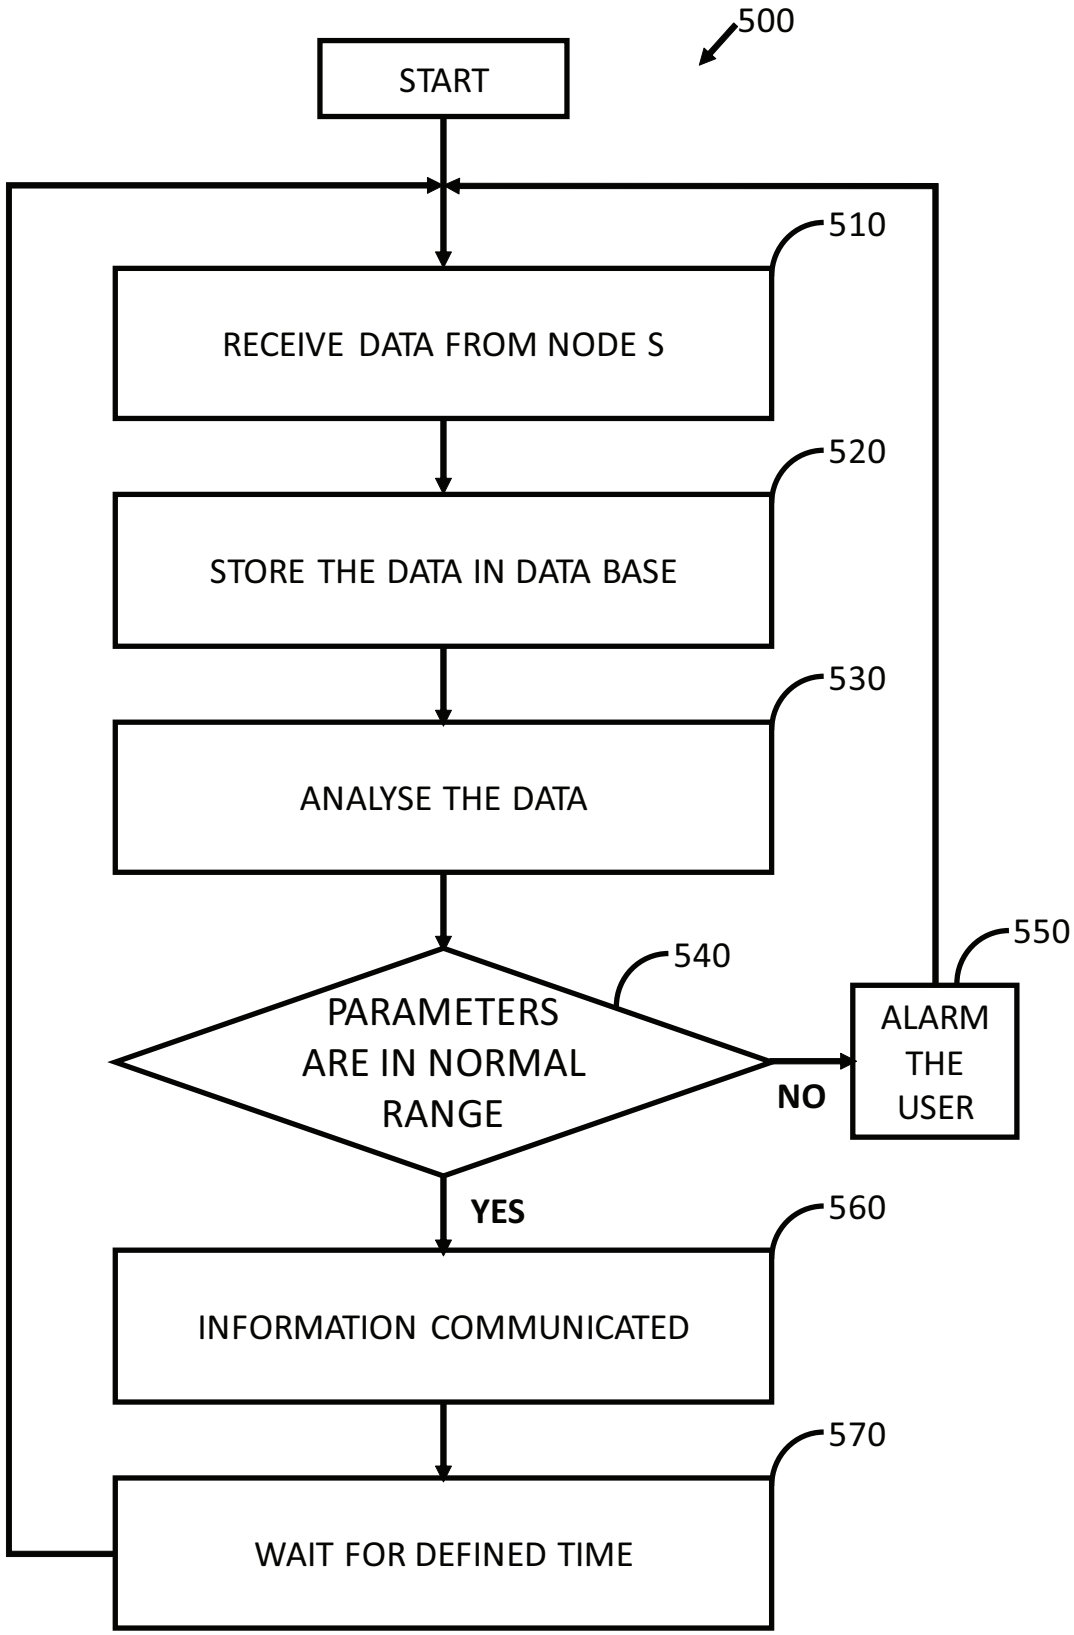

500
START
510
RECEIVE DATA FROM NODE S
520
STORE THE DATA IN DATA BASE
530
ANALYSE THE DATA
540
PARAMETERS ARE IN NORMAL RANGE
NO
550
ALARM THE USER
YES
560
INFORMATION COMMUNICATED
570
WAIT FOR DEFINED TIME

Fig. 5