


Expt 6(b): Config RIP Routing Protocol in Routers.

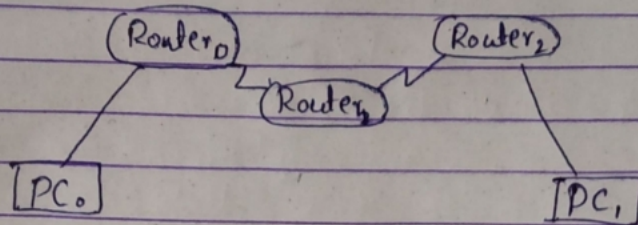

- Connect 2 pc's with 3 routers
- Config the ^{all the} routers
- Config the RIP for the routers
- To check if the router is collecting routing info, then use the command
show ip route
- Config the Both PCs
- Test the Ping Command
- After that simulate the topology.

RIP Protocol

- for serial connection interface.
 - encapsulation PPP (point to point protocol)
 - clock rate 60,000 (Only for clock)
- ⇒ Give clock rate to only one interface;
Not req for other interface