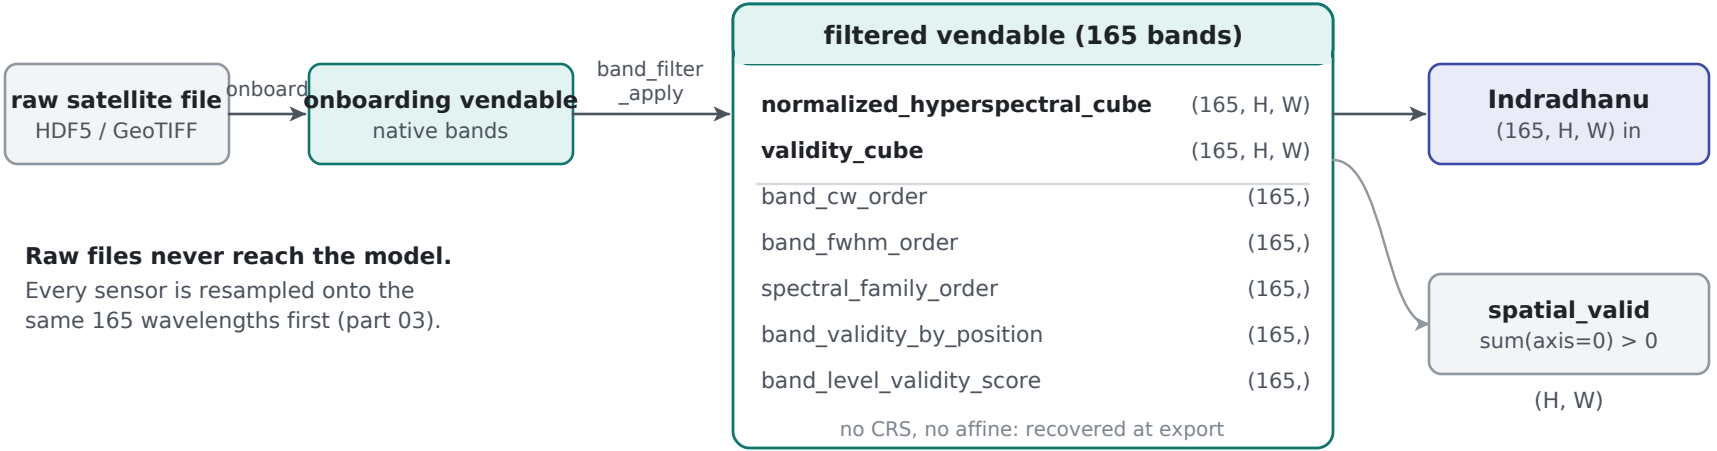

Raw files never reach the model.
Every sensor is resampled onto the same 165 wavelengths first (part 03).