



todo
description

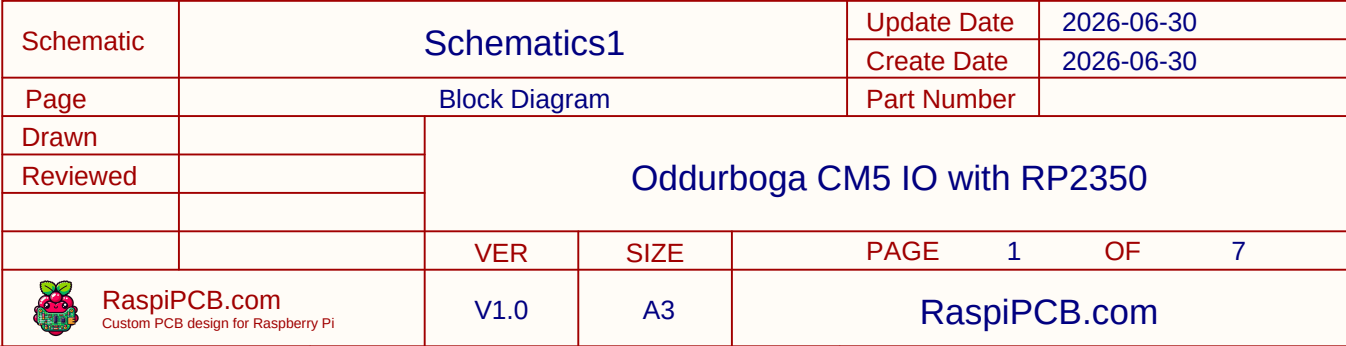


Mezzanine Connectors
for Raspberry Pi CM4 / CM5

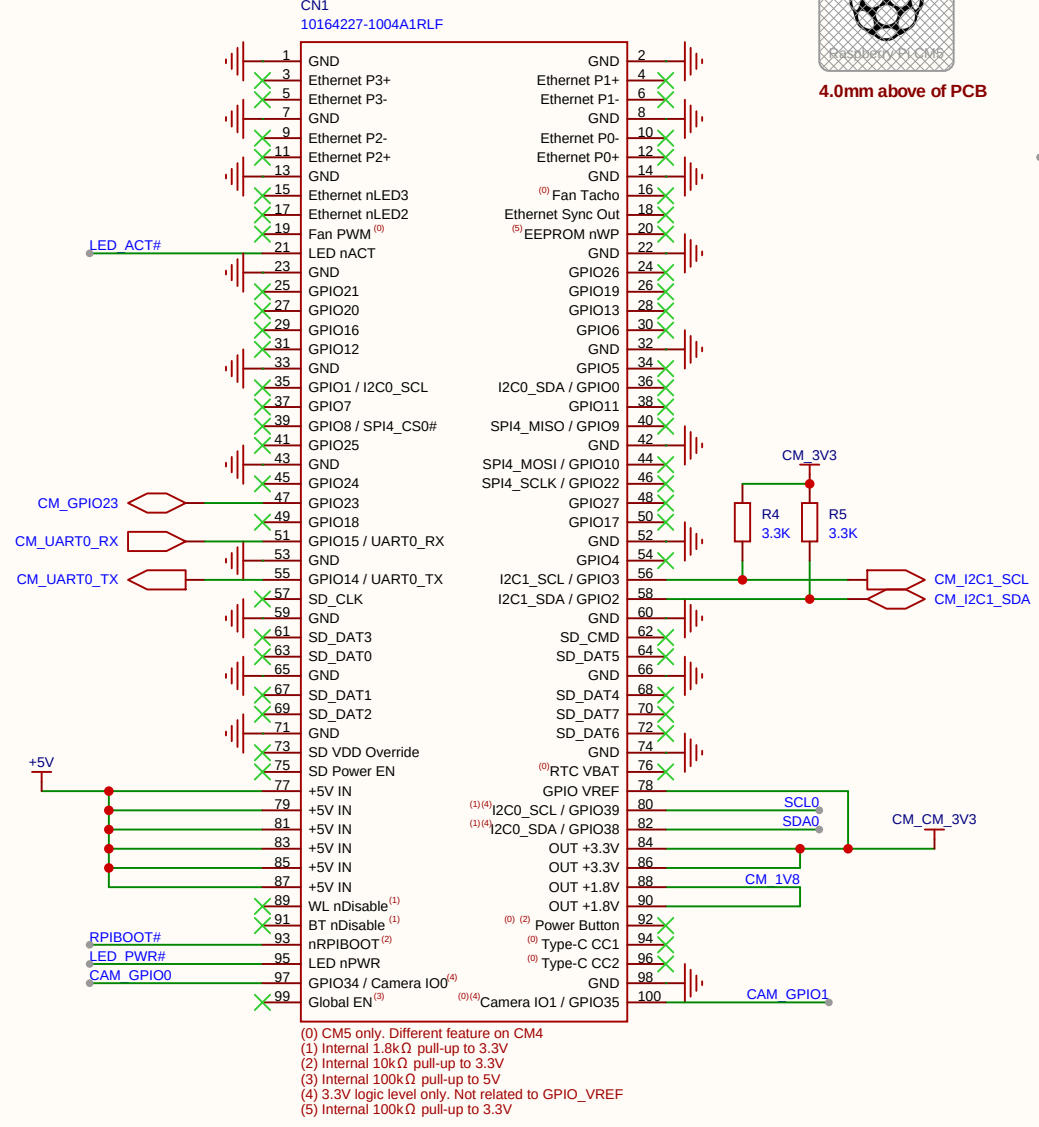


(0) CM5 only. Different feature on CM4
(1) Internal 1.8kΩ pull-up to 3.3V
(2) Internal 10kΩ pull-up to 3.3V
(3) Internal 100kΩ pull-up to 5V
(4) 3.3V logic level only. Not related to GPIO_VREF
(5) Internal 100kΩ pull-up to 3.3V


Power Supply Rails

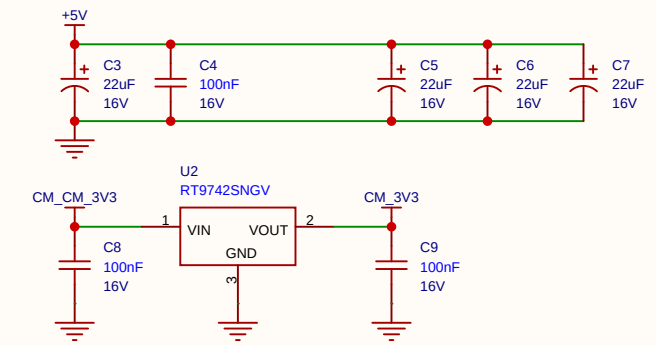


SMT PCB Nuts
M2.5 size, 4.0mm height

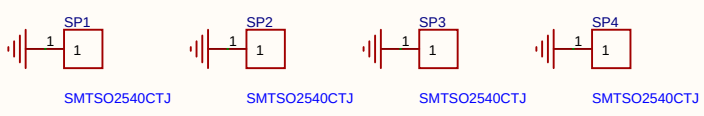

Status LEDs

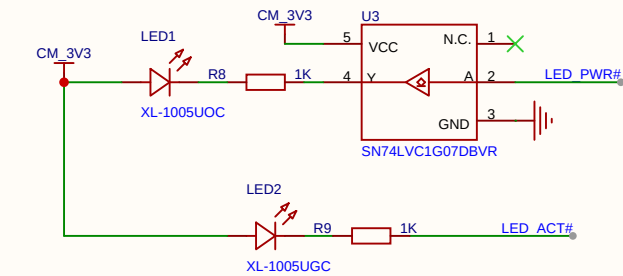


USB 2.0 Type-C

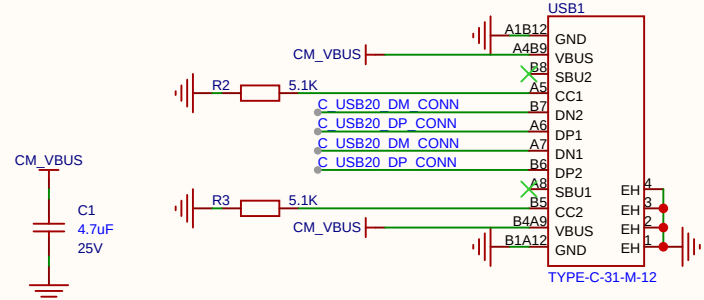


Camera

DPHY0 of CM5
CAM1 of CM4

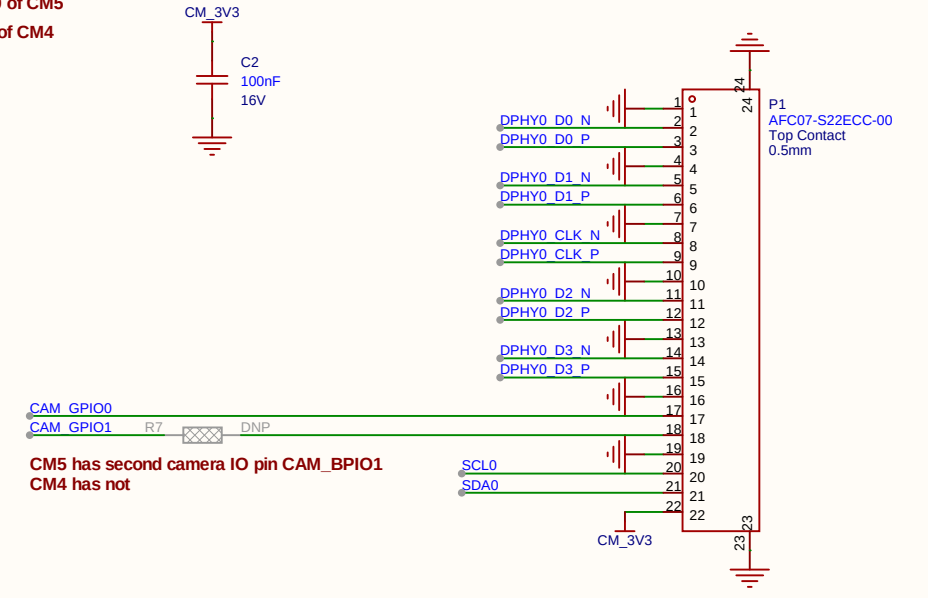


Schematic	Schematics1			Update Date	2026-06-30
				Create Date	2026-06-30
Page	Compute Module			Part Number	
Drawn		Oddurboga CM5 IO with RP2350			
Reviewed					
		VER	SIZE	PAGE	2 OF 7
 RaspiPCB.com Custom PCB design for Raspberry Pi	V1.0	A3	RaspiPCB.com		

HDMI Output

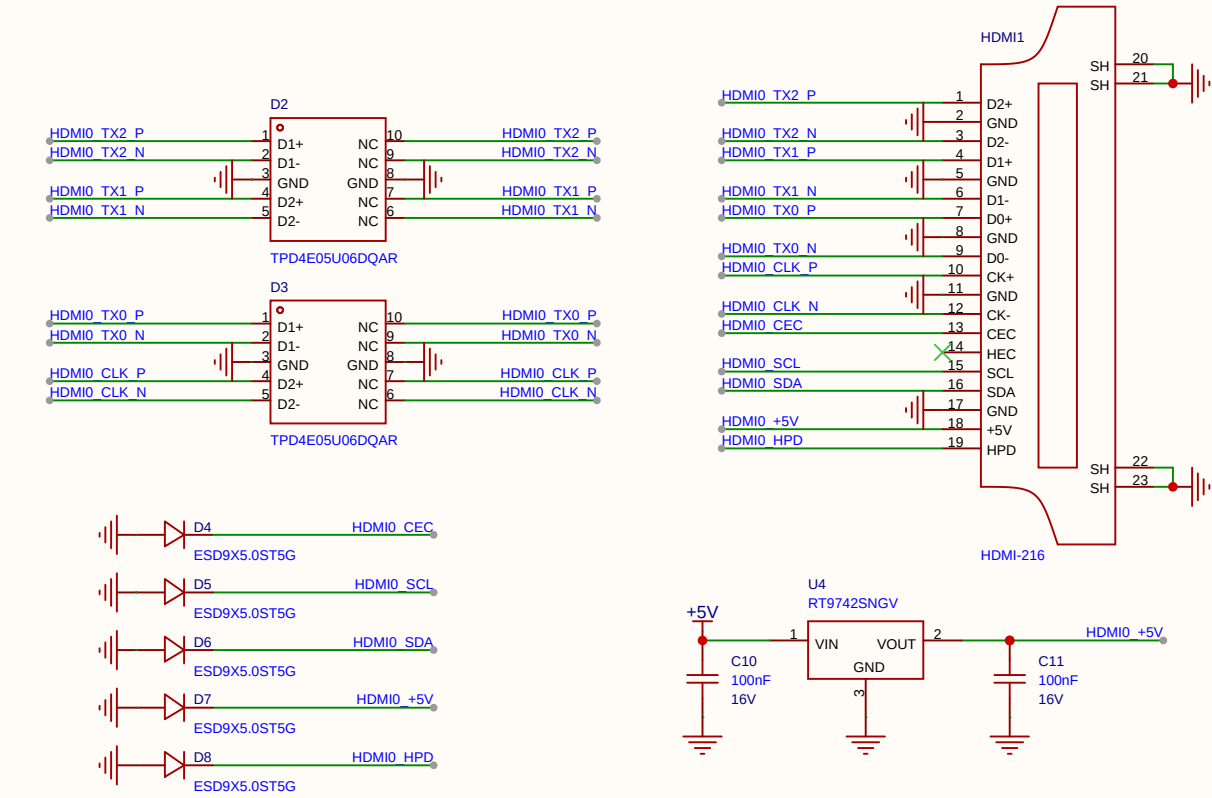


USB 3.0 Type-A

For Raspberry Pi CM5 only.
Possible to deliver power only with Raspberry Pi CM4



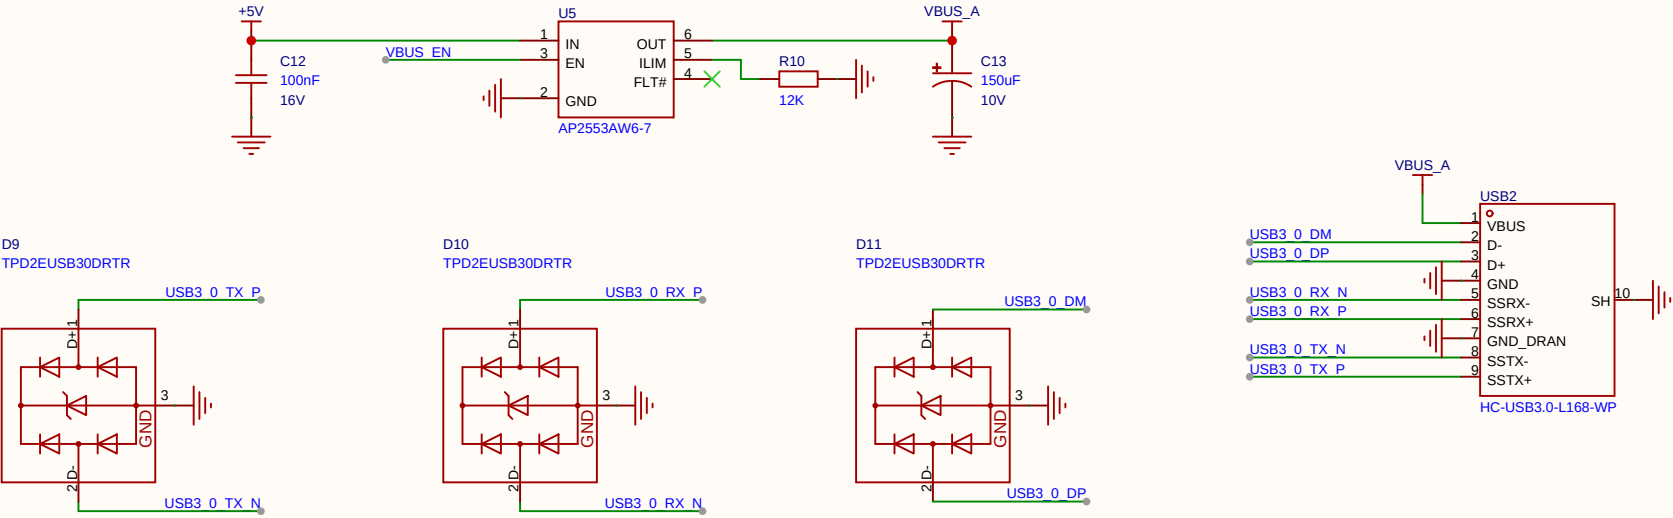


Schematic	Schematics1			Update Date	2026-06-30
				Create Date	2026-06-30
Page	Compute Module - HDMI & USB			Part Number	
Drawn		Oddurboga CM5 IO with RP2350			
Reviewed					
		VER	SIZE	PAGE	3 OF 7
 RaspiPCB.com Custom PCB design for Raspberry Pi		V1.0	A3	RaspiPCB.com	

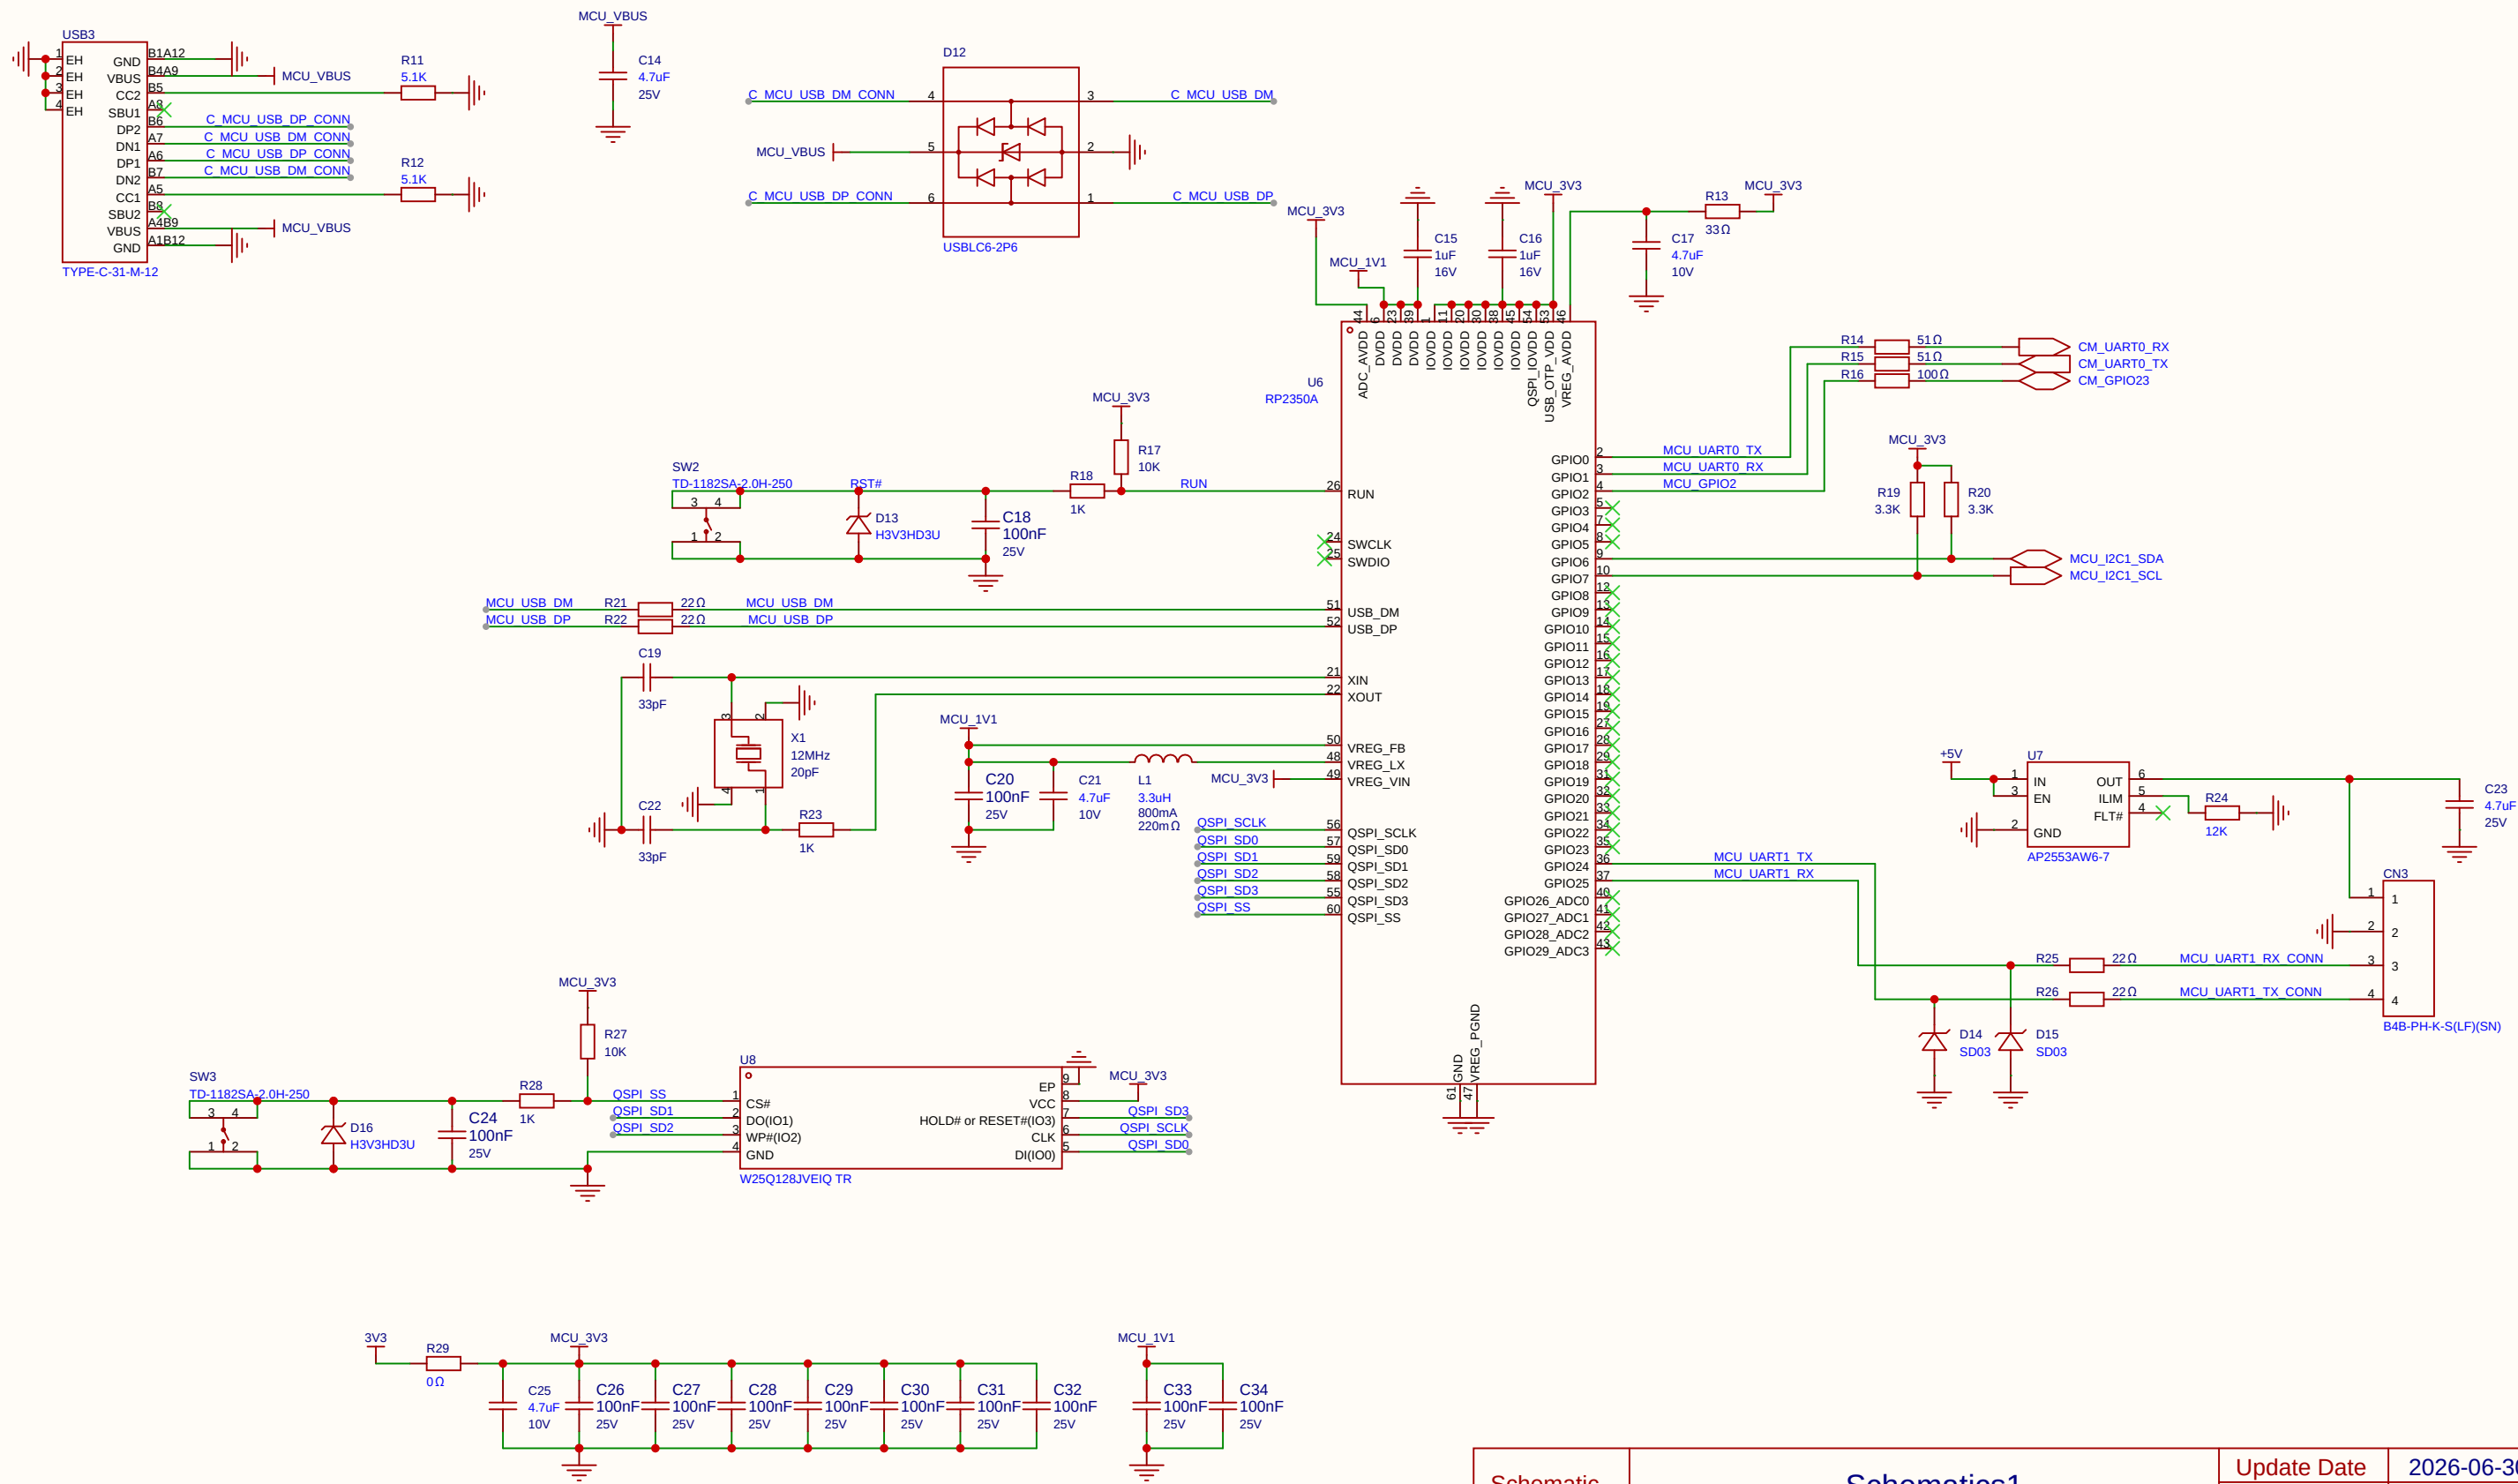


Schematic	Schematics1			Update Date	2026-06-30	
				Create Date	2026-06-30	
Page	Microcontroller			Part Number		
Drawn		Oddurboga CM5 IO with RP2350				
Reviewed						
		VER	SIZE	PAGE	4	OF 7
 RaspiPCB.com Custom PCB design for Raspberry Pi		V1.0	A3	RaspiPCB.com		

Analog Input : 3 ch Current Loops

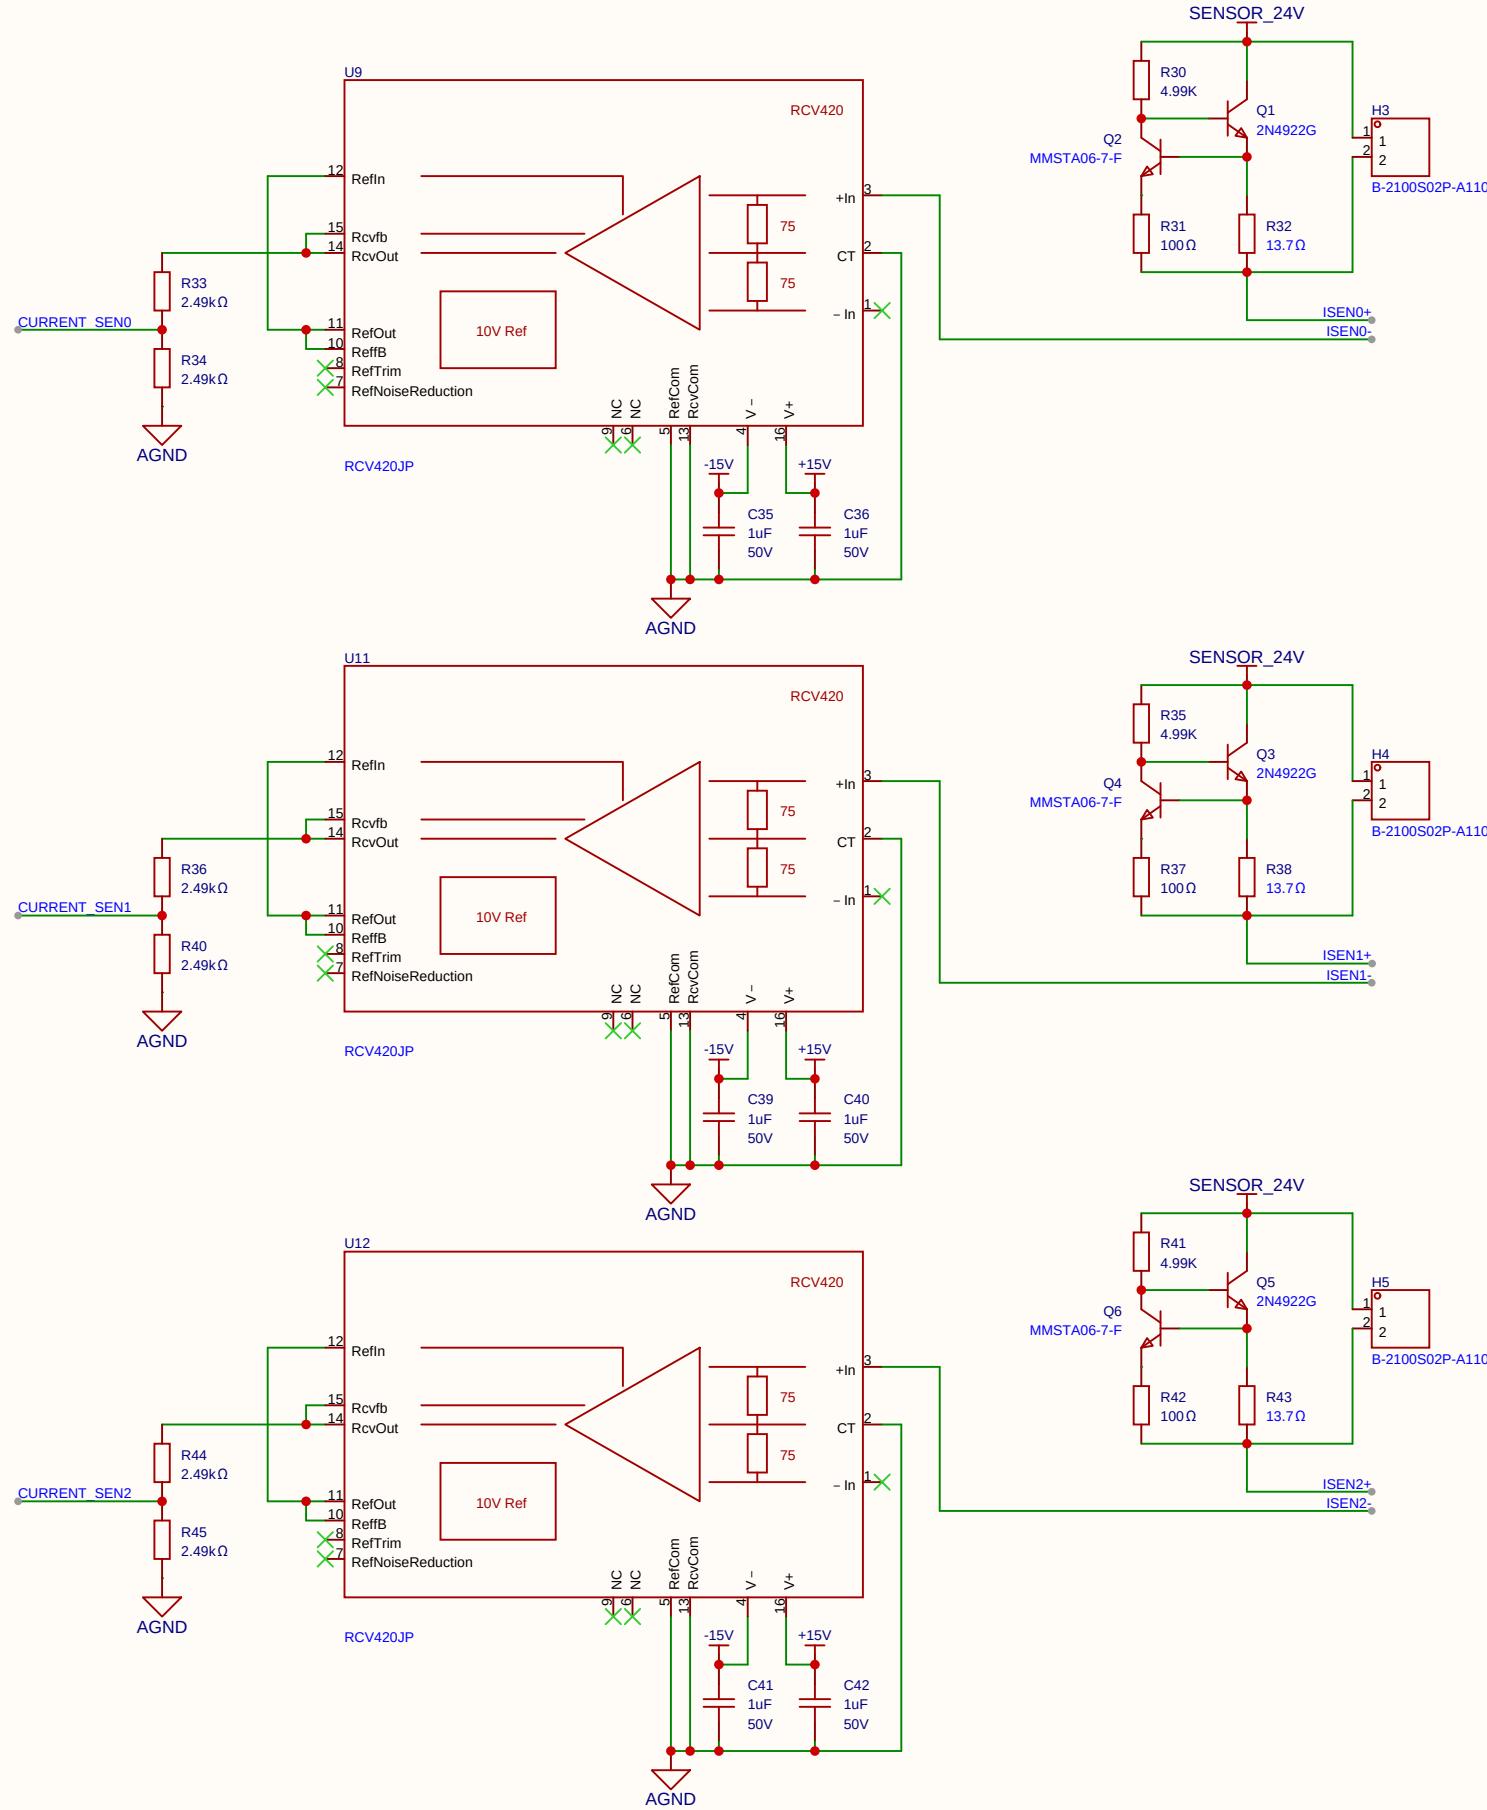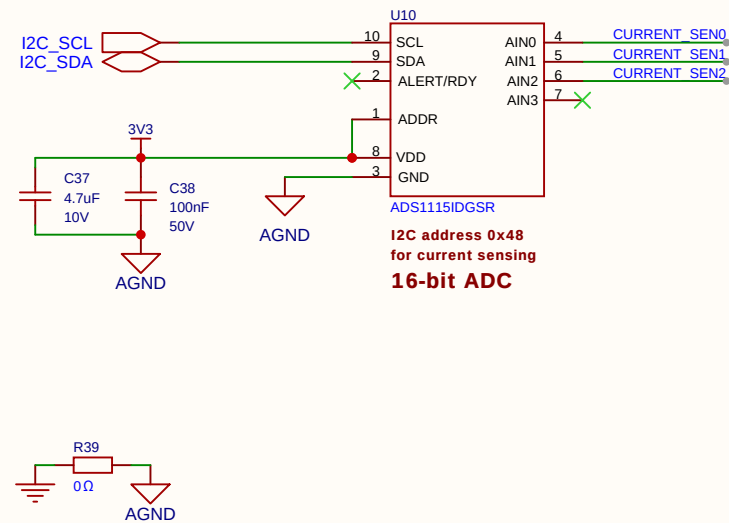




Schematic	Schematics1	Update Date	2026-06-30				
		Create Date	2026-06-30				
Page	IO - Current Loop	Part Number					
Drawn		Oddurboga CM5 IO with RP2350					
Reviewed							
		VER	SIZE	PAGE	5	OF	7
 RaspiPCB.com Custom PCB design for Raspberry Pi		V1.0	A3	RaspiPCB.com			

I2C IO Expander

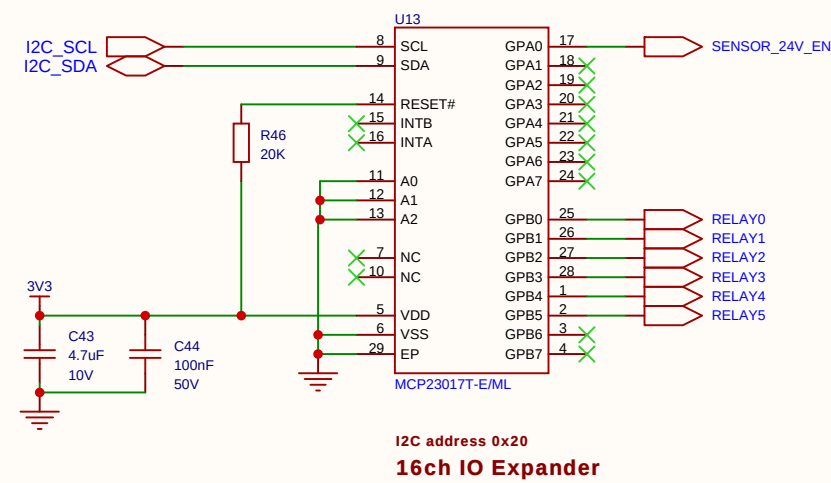


Digital Output : 6 ch Relays

Current consumption per relay coil : $5V / 69.4\Omega = 72mA$
Maximum current consumption : $72mA \times 6 = 432mA$

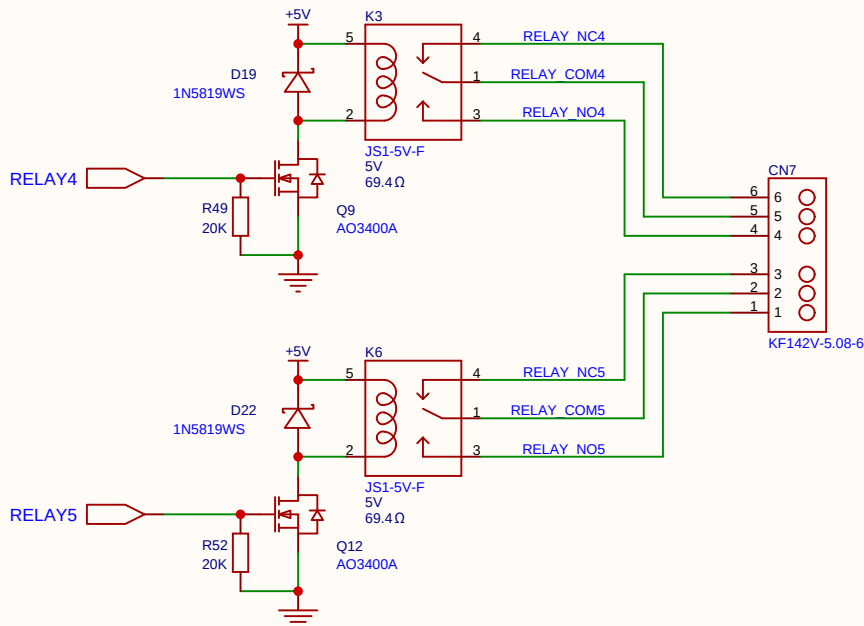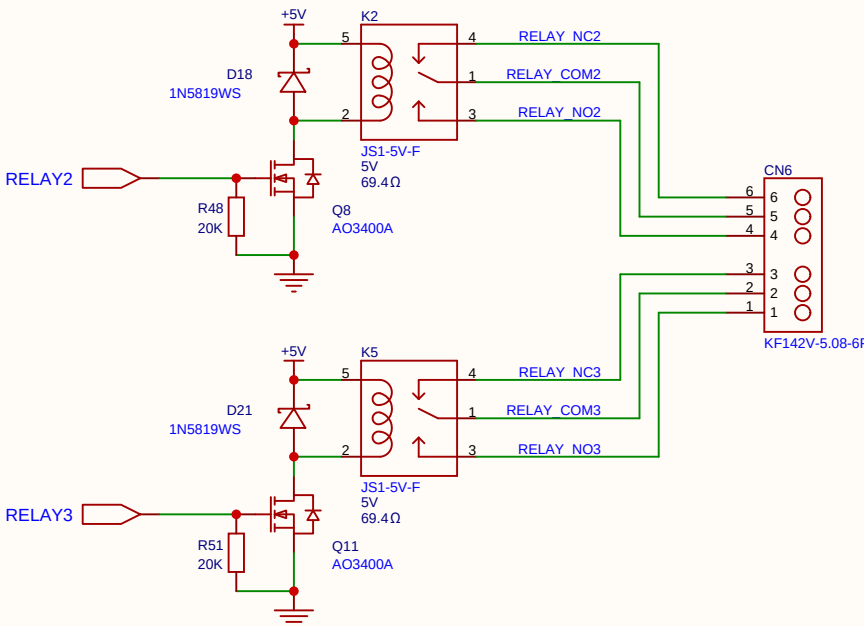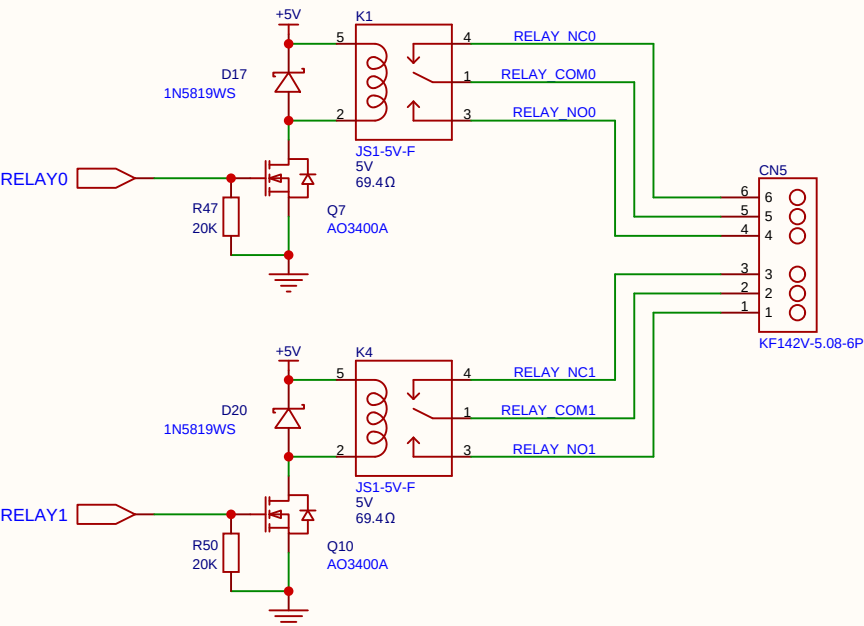


Schematic	Schematics1			Update Date	2026-06-30
				Create Date	2026-06-30
Page	IO - Relay			Part Number	
Drawn		Oddurboga CM5 IO with RP2350			
Reviewed					
		VER	SIZE	PAGE	6 OF 7
 RaspiPCB.com Custom PCB design for Raspberry Pi		V1.0	A3	RaspiPCB.com	


Input : 85V ~ 264V (AC)
Output : 5V 4A

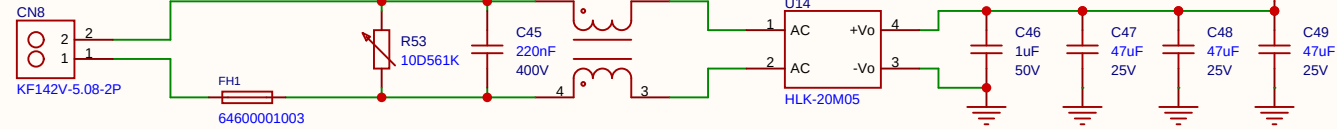


Overvoltage threshold : 5.5V
Undervoltage threshold : 4.5V

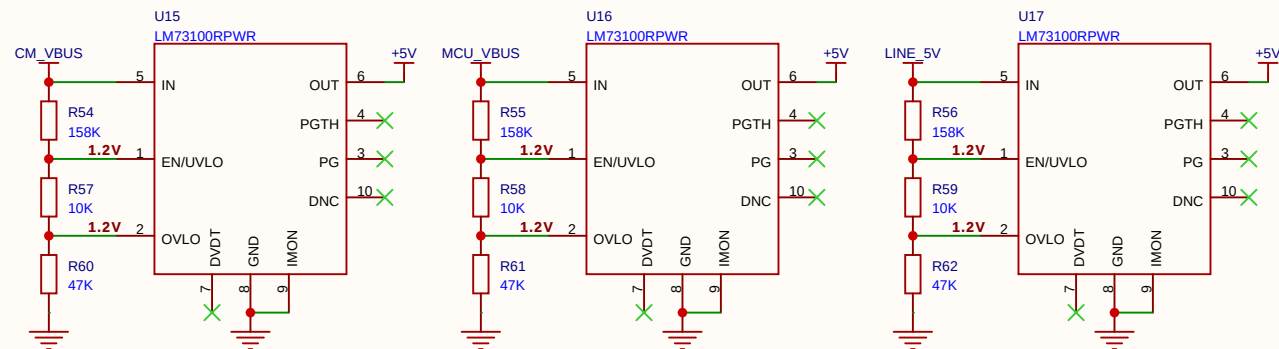


Input : 4.5V ~ 6V
Output : dual 15V 300mA

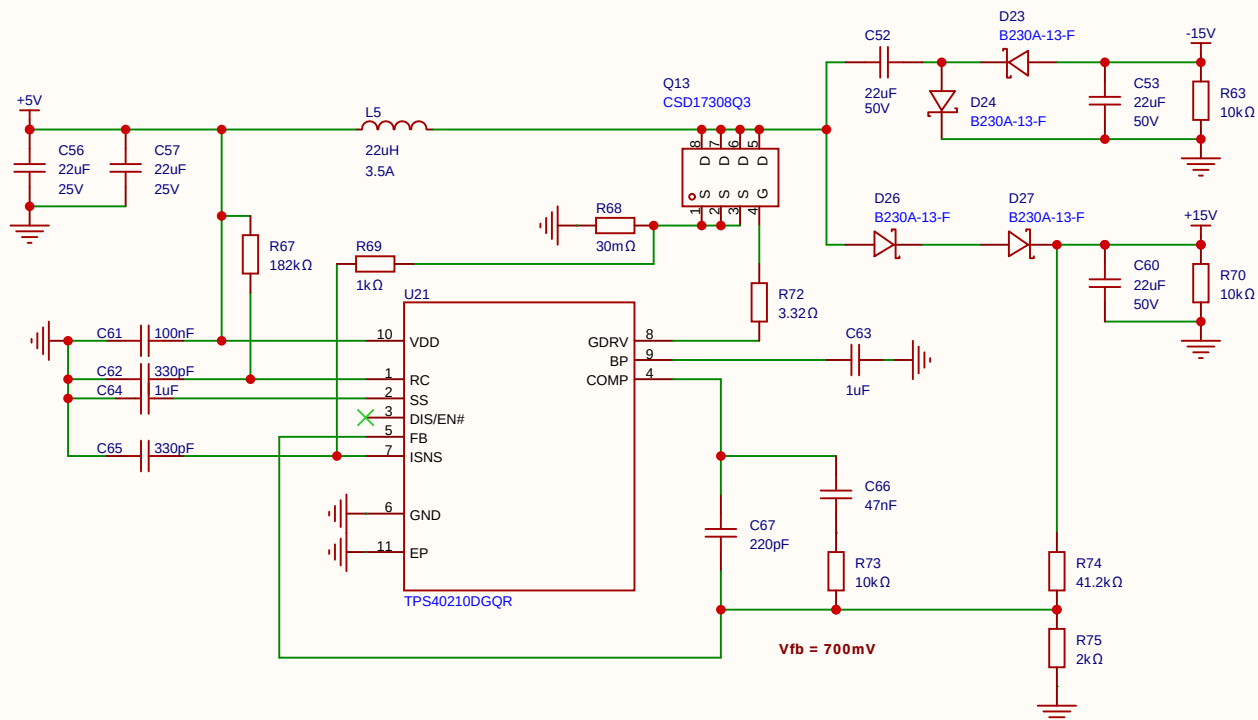

Input : 4V ~ 5.5V
Output :3.3V 300mA

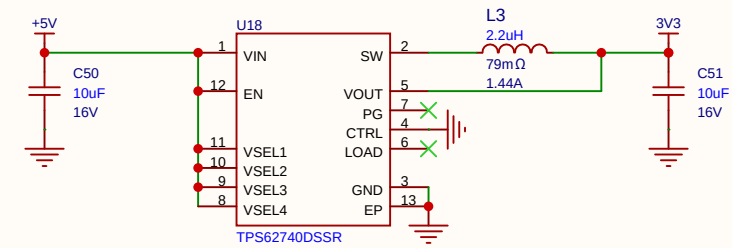

Input : 3V ~ 12V
Output : 24V 100mA

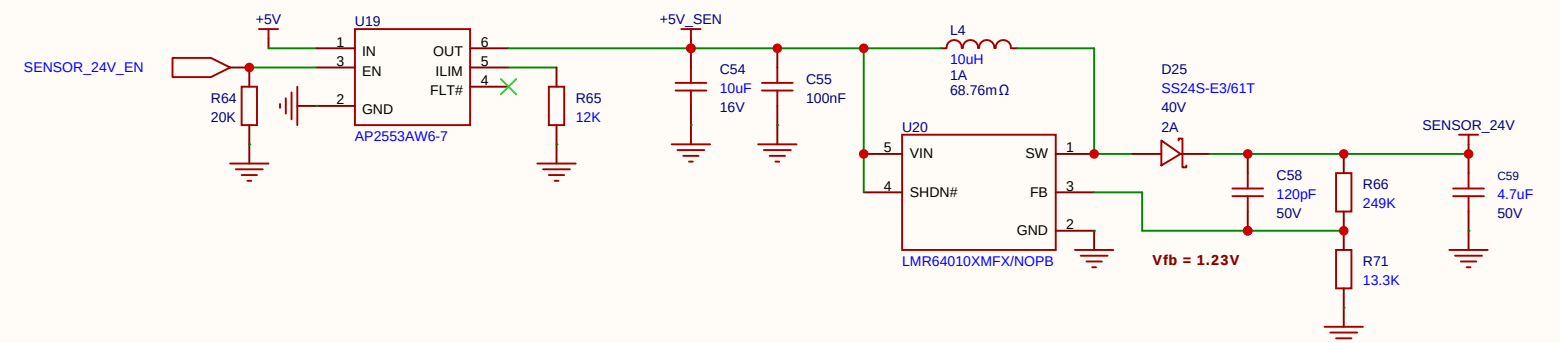

Schematic	Schematics1			Update Date	2026-06-30
				Create Date	2026-06-30
Page	Power Supply			Part Number	
Drawn		Oddurboga CM5 IO with RP2350			
Reviewed					
		VER	SIZE	PAGE	7 OF 7
 RaspiPCB.com Custom PCB design for Raspberry Pi		V1.0	A3	RaspiPCB.com	