MCU

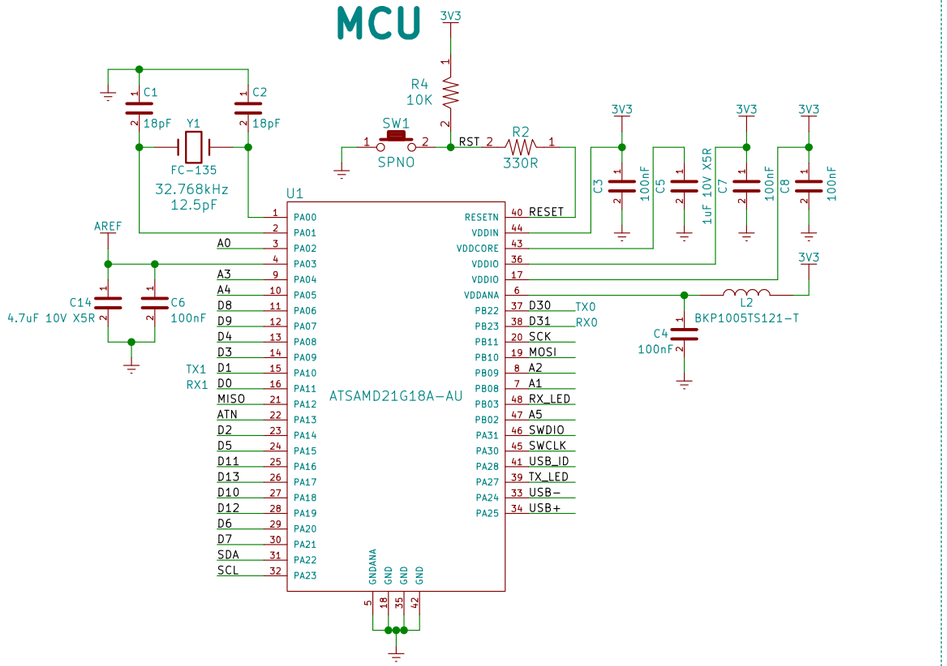

POWER MANAGEMENT

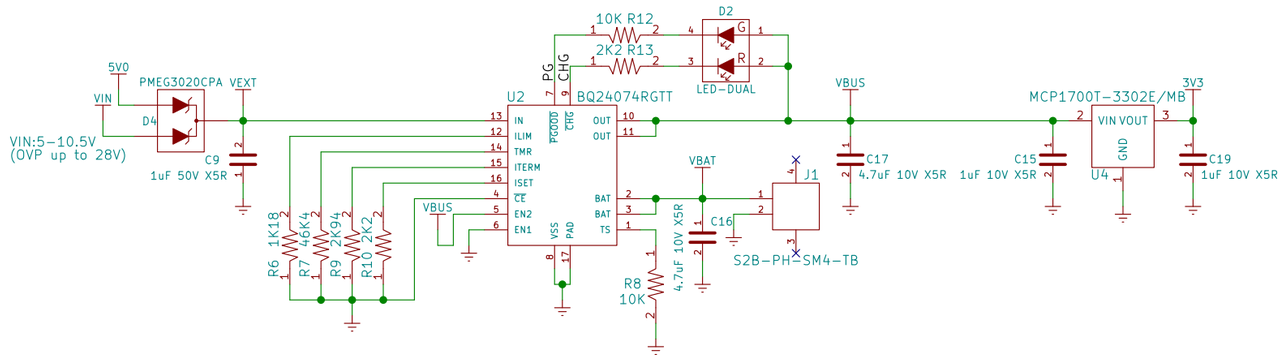

EN2	EN1	I-INPUT LIMIT
LOW	LOW	100mA
LOW	HI	500mA
HI	LOW	Set by R6:1.3A
HI	HI	Standby

LED



MOUNTING

FIDUCIALS



LOGO

USB-DEVICE

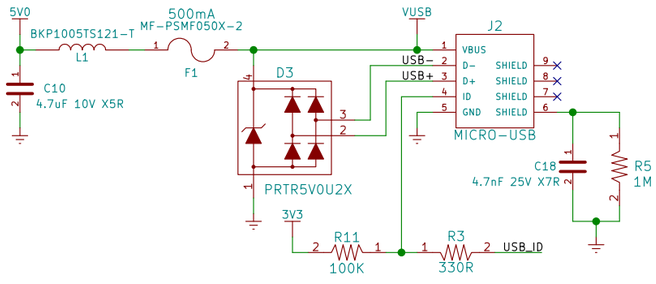

SERIAL FLASH



BREAKOUT

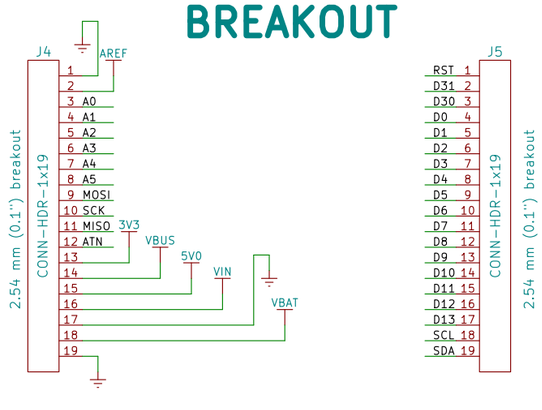

SWD/JTAG



RFM95W

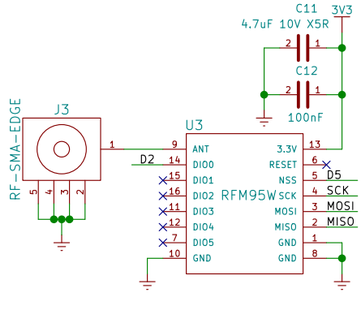

NOTES

1. All capacitors are NP0/C0G 50V unless specified.
2. All resistors are 62.5mW 1% unless specified.

Title: Mini Ultra Pro	ROCKET SCREAM
Rev: 0.20	
Rocket Scream Electronics	
Date: 2015-11-01	
File: MINI-ULTRA-PRO.sch	
Size: A3	
KiCad E.D.A. kicad 0.201602211417+657642ubuntu14.04.1-product	Id: 1/1