
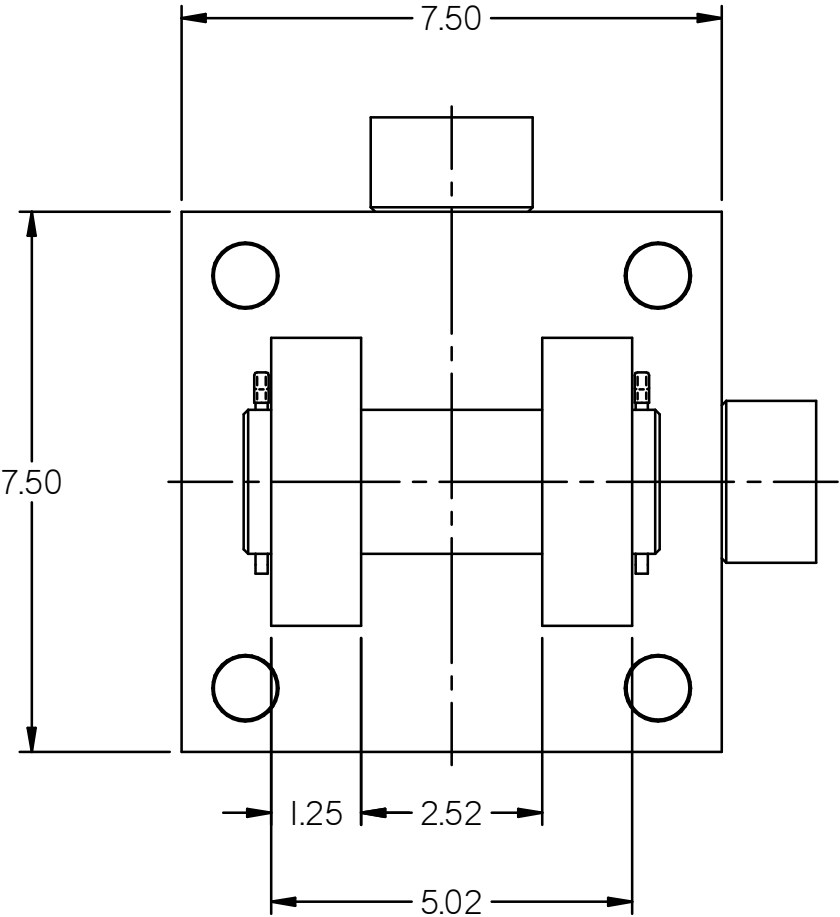
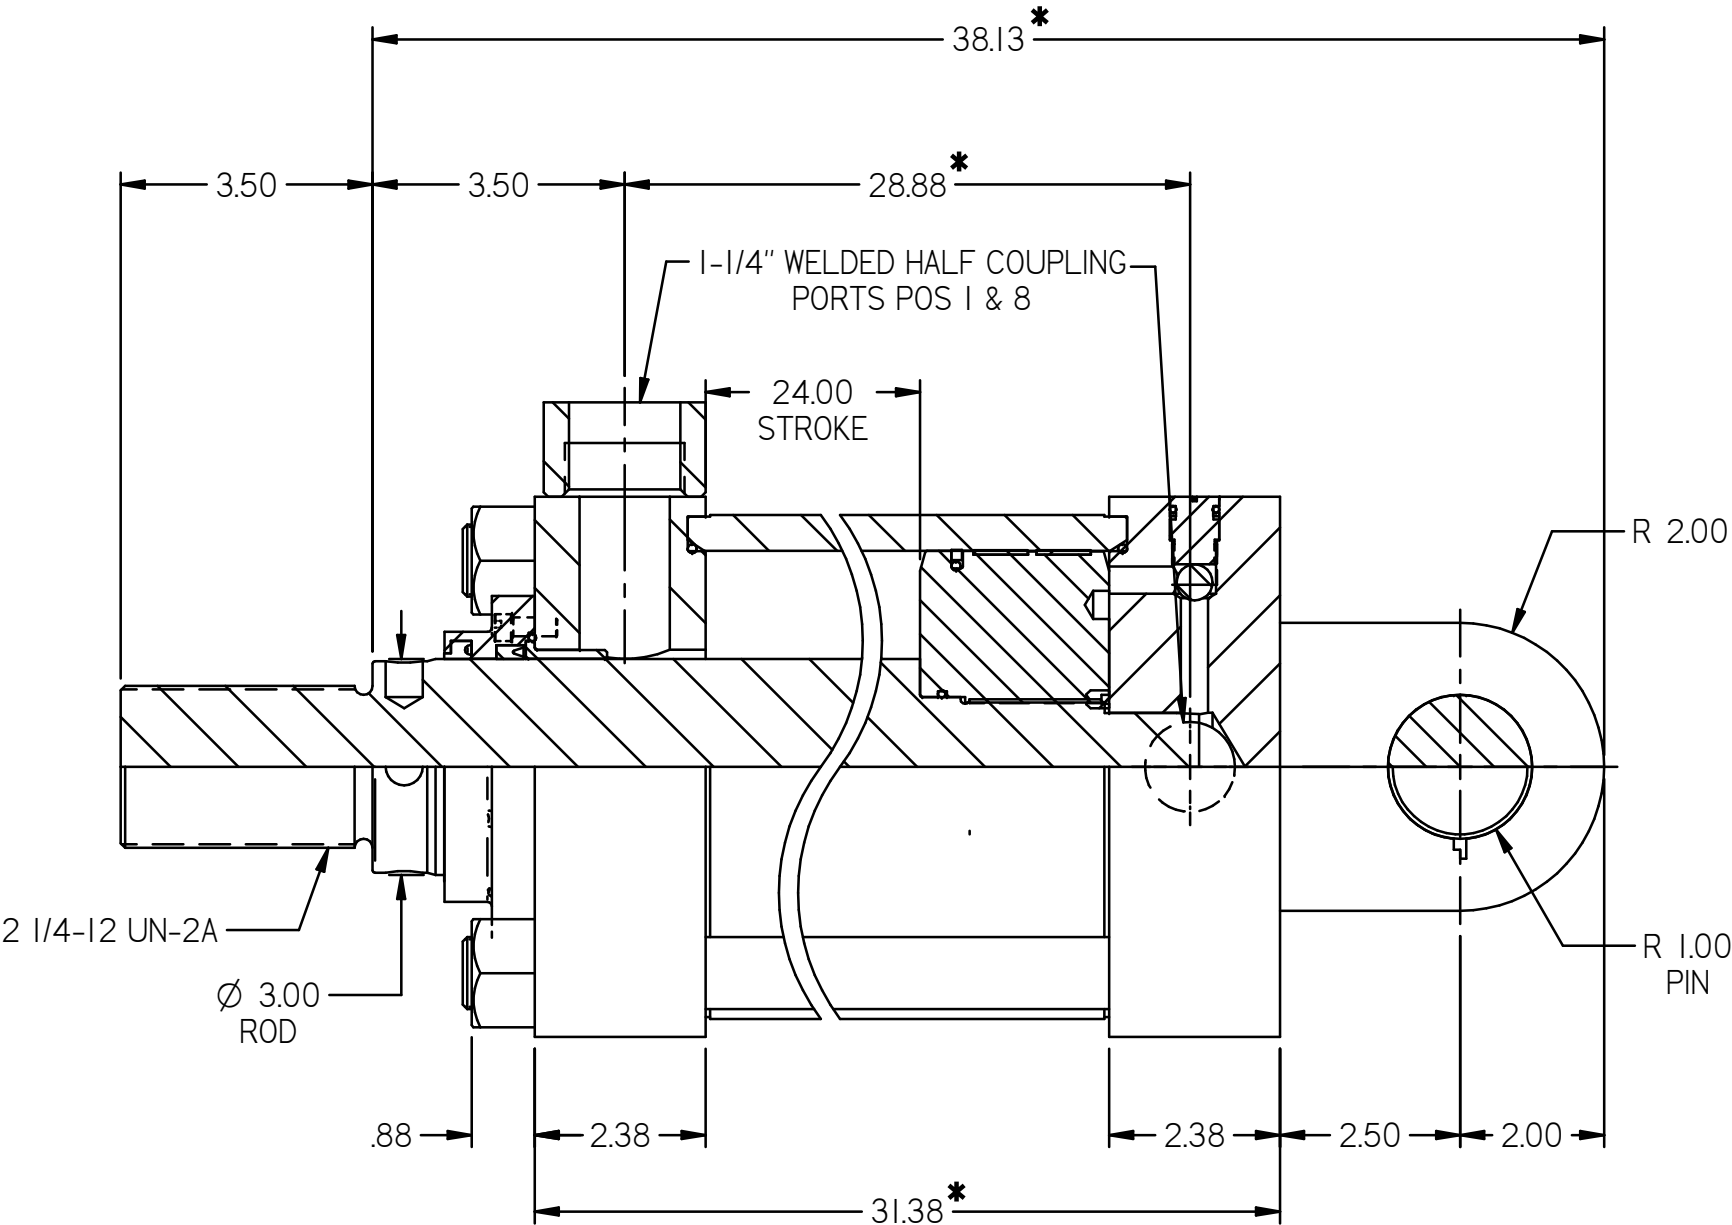


POSITION DIAGRAM
FOR PORTS, CUSHION
ADJUSTING SCREWS,
CUSHION CHECKS &
AIR BLEEDS



SEAL KIT NOTES		COMMENTS:		CUSTOMER NAME: KAMAN INDUSTRIAL TECHNOLOGIES			CUST. P/N:			THE SHEFFER CORPORATION							
SEAL KIT RECOMMENDED INCLUDES ITEMS		1. DIMENSIONS MARKED ' * ' INCLUDE 24" STROKE. 2. GENERIC MODEL: '6HHC24CRAK' WHERE: 3. A = 1-1/4" WELDED HALF COUPLING PORTS POS. 1 & 8. 4. A = CUSHION POSITION 5 & 7 5. K = 3" DIA. ROD STYLE 2. 6. PAINT GREY ACRYLIC.		MODEL NO: 6HHC24CRAK			PR MAX EXT. 3000 PSI.				CINCINNATI, OHIO 45242						
TORQUE NOTES				BORE: 6"		PORT POS: 1 & 8		PR MAX RET. 3000 PSI.			6" BORE, HEAVY DUTY HYD. (HH' SERIES) CLEVIS MOUNT, CUSHION REAR						
TIE ROD NUTS: 480 FT.-LBS GLAND SCREWS: 10 FT.-LBS				STROKE: 24"		CUSH ADJ SCR POS: 5		MEDIUM:									
PROPERTY OF THE SHEFFER CORPORATION				ROD STYLE: 2		CUSH CHECK POS: 7		TEMP: °F		3374420		DR. JRB 6/29/22		SCALE 3/8			
THIS DRAWING FURNISHED FOR ENGINEERING INFORMATION AND REFERENCE ONLY AND DOES NOT CONVEY ANY REPRODUCTION OR MFG RIGHTS				CERTIFIED BY		DATE		APPROVED BY		DATE		USED ON		CK.		APPR.	
												0600HHC02400CR0300S2-WI25PI8C0075		REV.		0	