INTERPUMP GROUP

INTERPUMP
PROCESS TECHNOLOGY

HOMOGENIZERS - PISTON PUMPS
COLLOIDAL MILLS - HIGH SHEAR MIXER
AGITATORS

Interpump Process Technology

Interpump Process Technology brings together the complementary experience of Bertoli and Mariotti & Pecini, two established Italian manufacturers of high-pressure homogenizers, agitators and mixers.

The company provides engineering, manufacturing, installation and service through a single organization, supporting food, pharmaceutical, biotechnology, cosmetics, chemical and industrial applications.

The range includes high-pressure homogenizers, piston pumps, colloidal mills, rotary pumps, high shear mixers and industrial agitators.


















HIGH PRESSURE HOMOGENIZERS

EVO - LINE

Interpump Process Technology homogenizers are designed for accurate and uniform particle-size reduction, emulsification and dispersion. The range includes the Evo Line for processes up to 600 bar, the Star Line for ultra-high-pressure applications and laboratory units for testing, pilot plants and scale-up.



HA30 | Evo Line

HA30 Evo Line is the compact industrial homogenizer in the range for continuous processing of liquid products up to 600 bar. Capacity is selected according to the required process pressure.

Model	Power kW	100 bar	200 bar	250 bar	400 bar	600 bar
HA30	15	5.000 l/h	2.500 l/h	1.800 l/h	1.100 l/h	800 l/h



HA32-HA33-HA34 HA35-HA36 | Evo Line

The HA32, HA33, HA34, HA35 and HA36 homogenizers share the industrial Evo Line architecture. The different sizes cover powers from 30 to 250 kW and increasing capacities while maintaining a maximum pressure of 600 bar.

Model	Power kW	100 bar	200 bar	250 bar	400 bar	600 bar
HA32	30	8.000 l/h	5.000 l/h	4.000 l/h	2.500 l/h	1.600 l/h
HA33	45	15.000 l/h	7.500 l/h	6.000 l/h	3.500 l/h	2.500 l/h
HA34	90	24.000 l/h	15.000 l/h	12.000 l/h	7.500 l/h	5.000 l/h
HA35	110	35.000 l/h	18.000 l/h	15.000 l/h	9.000 l/h	5.500 l/h
HA36	250	45.000 l/h	40.000 l/h	32.000 l/h	20.000 l/h	14.000 l/h



HA51-HA53 | Evo Line

HA 51 and HA53 Evo Line are the high-capacity size in the family. With power up to 400 kW, they reach capacities up to 90.000 l/h and operate at pressures up to 600 bar.

Model	Power kW	100 bar	200 bar	250 bar	400 bar	600 bar
HA51	160	40.500 l/h	27.500 l/h	20.000 l/h	13.500 l/h	9.000 l/h
HA53	400	90.000 l/h	65.000 l/h	52.000 l/h	32.000 l/h	24.600 l/h

HIGH PRESSURE HOMOGENIZERS

STAR - LINE



Molecola | Star Line

Molecola is a Star Line homogenizer for pilot plants and specialist production. It is designed to operate at pressures up to 1,500 bar with a maximum power of 15 kW.

Model	Power kW	1000 bar	1200 bar	1500 bar
MOLECOLA	15	5.000 l/h	2.500 l/h	1.800 l/h



HA32-HA33-HA34 HA35-HA36 | Star Line

The HA32, HA33, HA34, HA35 and HA36 Star Line range is dedicated to ultra-high-pressure processes. Power range: 30-250 kW. Pressure: up to 1.500 bar.

Model	Power kW	1000 bar	1200 bar	1500 bar
HA32	30	700 l/h	600 l/h	450 l/h
HA33	45	2.400 l/h	2.000 l/h	1.500 l/h
HA34	90	2.400 l/h	2.000 l/h	1.500 l/h
HA35	110	3.000 l/h	2.500 l/h	1.800 l/h
HA36	250	5.500 l/h	4.500 l/h	4.000 l/h



HA53 | Star Line

HA51 and HA53 Star Line bring ultra-high-pressure technology to the largest production capacities in the range. The machines reach 1,500 bar with power up to 400 kW.

Model	Power kW	1000 bar	1200 bar	1500 bar
HA53	400	8.500 l/h	7.500 l/h	6.000 l/h

HIGH PRESSURE HOMOGENIZERS

Interpump Process Technology offers its customers a fully equipped laboratory with specialized equipment for conducting homogenization tests, supported by experienced technicians.

Laboratory And Pilot Plants







Atomo 3.0

Atomo 3.0 is a three-piston homogenizer for laboratories, pilot plants and scale-up work. The machine combines ease of use, low noise and performance up to 1.500 bar.

Model	Power kW	Pressure bar	Maximum capacity l/h
ATOMO 3.0	4	1.500	650

Quark

Quark is a single-piston benchtop homogenizer for tests with small samples. It requires a minimum volume of 10 ml, can also be syringe-fed and supports tests up to 2.000 bar.

Model	Power kW	200 bar	2.000 bar
QUARK	0.75	3 l/h	1.2 l/h



PISTON PUMPS

Interpump Process Technology piston pumps manufactured to handle pressures up to 600 bar. This range of volumetric piston pumps is ideal for the food and beverage sector



PA30 | Evo Line

The PA30 Evo Line is designed with a green approach to reduce environmental impact, ensuring energy efficiency and sustainability in liquid processing. The machine operates at pressures up to 600 bar with a maximum power of 15 kW.

Model	Power kW	100 bar	200 bar	250 bar	400 bar	600 bar
PA30	15	3.000 l/h	1.400 l/h	1.100 l/h	800 l/h	500 l/h



PA32-PA33-PA34 PA35-PA36 | Evo Line

The PA32, PA33, PA34, PA35 and PA36 Evo Line is designed with a green approach to reduce environmental impact, ensuring energy efficiency and sustainability in liquid processing.


Model	Power kW	100 bar	180 bar	200 bar	250 bar	400 bar	600 bar
PA32	30	8.000 l/h	-	5.000 l/h	4.000 l/h	2.500 l/h	1.600 l/h
PA33	45	15.000 l/h	8.000 l/h	7.500 l/h	6.000 l/h	3.500 l/h	2.500 l/h
PA34	90	24.000 l/h	-	15.000 l/h	12.000 l/h	7.500 l/h	5.000 l/h
PA35	110	35.000 l/h	-	18.000 l/h	15.000 l/h	9.000 l/h	5.500 l/h
PA36	250	45.000 l/h	-	40.000 l/h	32.000 l/h	20.000 l/h	14.000 l/h



PA51-PA53 | Evo Line

The PA51, PA53 Evo Line is the highest-capacity pump in the range. With power up to 400 kW, it reaches capacities up to 90,000 l/h and pressures up to 600 bar.

Model	Power kW	100 bar	200 bar	250 bar	400 bar	600 bar
PA51	160	40.500 l/h	27.500 l/h	20.000 l/h	13.500 l/h	9.000 l/h
PA53	400	90.000 l/h	65.000 l/h	52.000 l/h	32.000 l/h	24.600 l/h

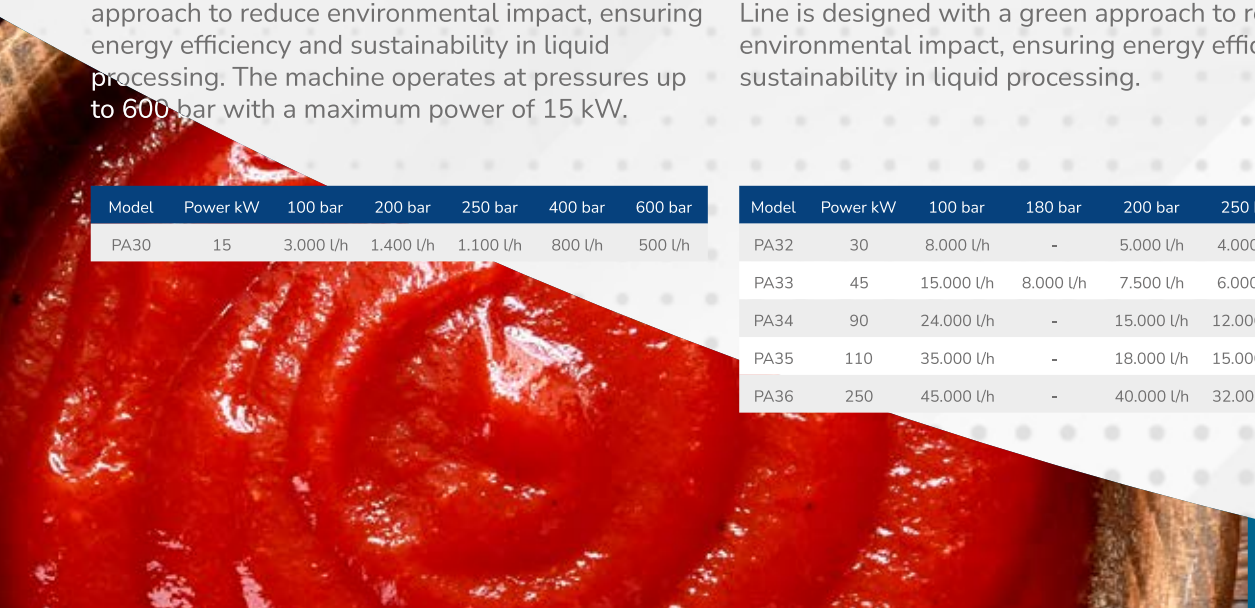

PISTON PUMPS

PX - TP - PS



PX | Pumps For Products Containing Pieces

PX pumps gently transfer products containing pieces up to 30 mm while maintaining a consistent solid-to-liquid ratio and preserving product shape. The range covers different capacities and power ratings at pressures up to 80 bar.

Model	Power kW	25 bar	40 bar	80 bar
PX31	11	7.000 l/h	7.000 l/h	3.500 l/h
PX33	18.5 - 22	14.000 l/h	13.000 l/h	5.500 l/h



TP23 | Pumps For Products Containing Pieces

TP23 is a pump for the gentle transfer of products containing pieces up to 60 x 60 mm. The documented configuration reaches 12,000 l/h at 16 bar with a DN100 connection.

Model	Power kW	16 bar
TP23	9.2 + 9.2	12.000 l/h



PS | Self Priming Pumps

PS32, PS34 and PS36 are self-priming piston pumps. Their horizontal layout facilitates installation below a tank or degasser and transfers the product without an additional feed pump

Model	Power kW	70 bar
PS32	15	6.000 l/h
PS34	30	12.000 l/h
PS36	55	18.000 l/h

COLLOIDAL MILLS, ROTARY PUMPS AND HIGH SHEAR MIXERS

The range combines rotor-stator equipment for grinding, emulsification, dispersion and in-line mixing with rotary, centrifugal and grinder pumps. The machines are designed for continuous processes in food, pharmaceutical, cosmetics, chemical and industrial applications.



BMC | Colloidal Mills

BMC colloidal mills use rotor-stator technology to grind solids, create emulsions and produce homogeneous products. The range covers capacities from 3,000 to 25,000 l/h and power ratings from 5.5 to 55 kW.

Model	Power kW	6 bar
BMC006	5.5	3.000 l/h
BMC015	15	6.000 l/h
BMC037	37	12.000 l/h
BMC055	55	25.000 l/h



BE | Centrifugal Pumps

BE centrifugal pumps are designed for transferring viscous products. The three sizes allow power and capacity to be selected according to the process, with capacities up to 120,000 l/h.

Model	Power kW	Pressure bar	Maximum capacity l/h
BE23	5.5	2.3	32,000
BE28	11	2.3	60,000
BE33	30	2.3	120,000



BT60L | Grinder Pump

BT60L combines pumping and grinding for processing tomatoes and pitted fruit. The internal blades produce a regular, fine particle size that facilitates subsequent processing stages

Model	Power kW	Pressure bar	Maximum capacity l/h
BT60L	30	6	60

COLLOIDAL MILLS, ROTARY PUMPS AND HIGH SHEAR MIXERS





HSM | High Shear Mixers

HSM high shear mixers are in-line rotor-stator machines that generate localized shear for emulsification, dispersion and particle-size reduction. The four sizes cover capacities from 500 to 12,000 l/h.

Model	Power kW	6 bar
HSM 0055	0.55	500 l/h
HSM 006	5.5	3.000 l/h
HSM 015	15	6.000 l/h
HSM 037	37	12.000 l/h

INDUSTRIAL AGITATORS

Interpump Process Technology industrial agitators cover vertical, side-entry, magnetic-drive and coaxial configurations. Each solution is sized according to fluid characteristics, vessel geometry and the required mixing, homogenization, solids-suspension or heat-transfer duty.



AC | Vertical Agitator

Direct-drive vertical agitator for low-viscosity media in small atmospheric vessels. The marine propeller promotes circulation; installation may be centered with baffles or off-center.

Model	Drive	Pressure	Configuration and application
AC	Direct drive	Atmospheric	Low-viscosity media in small vessels



AR | Vertical Agitator

Geared vertical agitator for mixing liquids and keeping solids in suspension in open tanks or atmospheric vessels. The impeller configuration is selected according to the product and vessel.


Model	Drive	Pressure	Configuration and application
AR	Geared	Atmospheric	Liquid mixing and solids suspension



ART | Vertical Agitator

Geared vertical agitator with a single mechanical seal for pressurized or vacuum vessels. The cast-iron bearing housing and spacer coupling provide a robust construction and facilitate seal replacement.

Model	Drive	Pressure	Configuration and application
ART	Geared	-1 to +10 bar	Single mechanical seal for pressure or vacuum

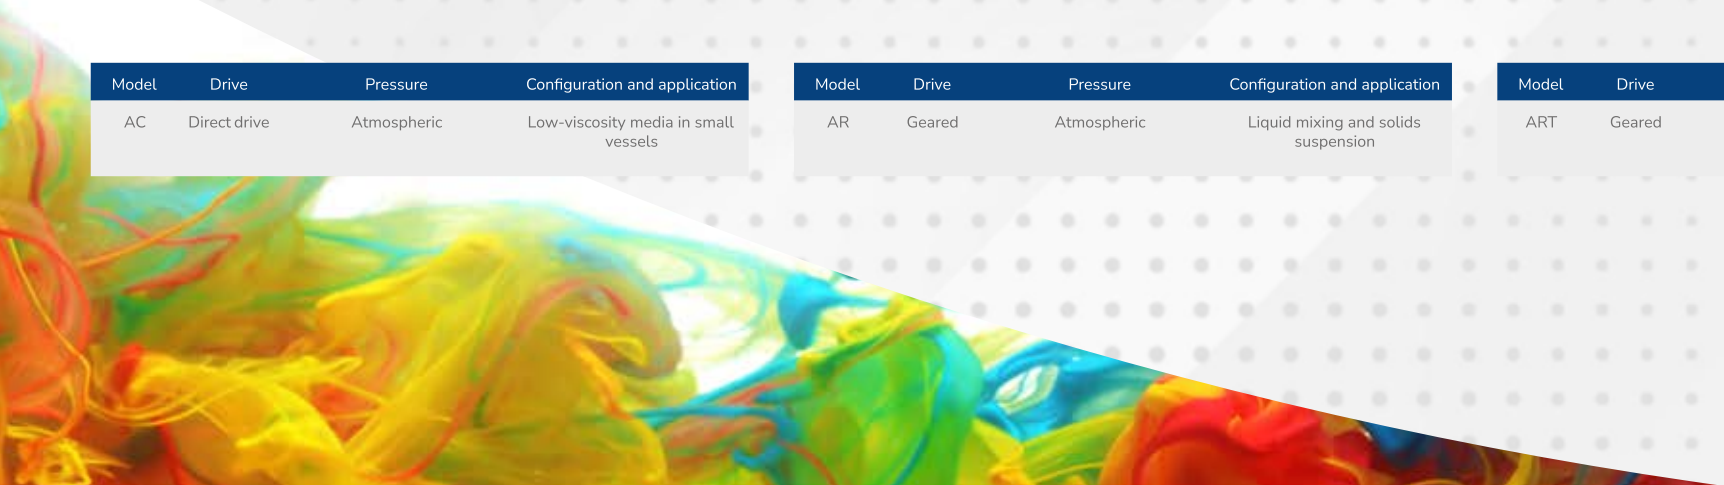

Vertical Agitator



AR2T | Vertical Agitator

Geared vertical agitator with a double mechanical seal for pressurized or vacuum reactors. It can be configured for aggressive or hazardous products and for applications requiring a flushed sealing system.

Model	Drive	Pressure	Configuration and application
AR2T	Geared	-1 to +10 bar	Double mechanical seal for critical products



ARTL | Vertical Agitator

Geared vertical agitator with a lip seal. Impeller and material configurations are available for mixing applications in pressurized or vacuum vessels.

Model	Drive	Pressure	Configuration and application
AR2T	Geared	-1 to +10 bar	Double mechanical seal for critical products



ARB | Vertical Agitator


Geared vertical agitator with a cast-iron bearing housing and packed gland seal. It is intended for vessels under light pressure and combines geared mixing with shaft guidance.

Model	Drive	Pressure	Configuration and application
ARB	Geared	0 to +2 bar	Packed gland seal for light pressure


INDUSTRIAL AGITATORS

Side Entry - Coaxial Dual Shaft

Interpump Process Technology industrial agitators cover vertical, side-entry, magnetic-drive and coaxial configurations. Each solution is sized according to fluid characteristics, vessel geometry and the required mixing, homogenization, solids-suspension or heat-transfer duty.





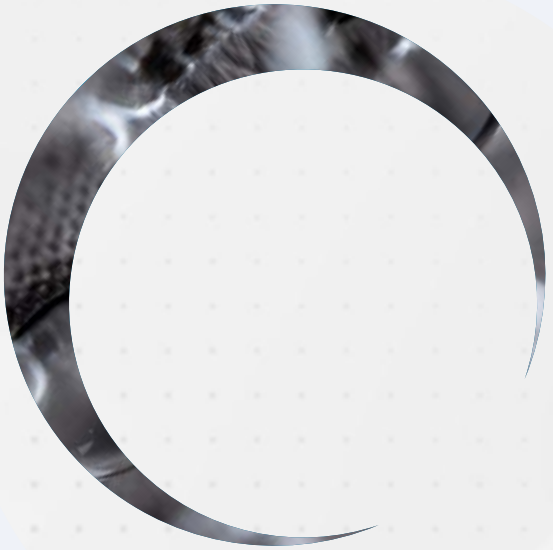

AL - ARL | Side Entry Agitators

Direct-drive vertical agitator for low-viscosity media in small atmospheric vessels. The marine propeller promotes circulation; installation may be centered with baffles or off-center.

Model	Drive	Pressure	Configuration and application
AL	Direct drive	-1 to +10 bar	Low-viscosity liquids
ARL	Geared	-1 to +10 bar	Liquids and solids suspension

DM | Coaxial Dual Shaft Agitator

DM is a coaxial vertical agitation system for cream preparation. It combines counter-rotating shafts with a configurable anchor and optional scrapers for chemical, pharmaceutical and cosmetics applications.

Model	Power kW	Pressure bar	Maximum capacity l/h
DM	0.25 - 22	-1 / +6	-

Magnetic Agitator



MSB | Magna Safe Magnetic Drive Agitators

Bottom-mounted MSB magnetic drive agitators completely separate the process chamber from the environment. Magnetic drive eliminates the dynamic seal and supports sterile food, biotechnology and pharmaceutical applications.

Model	Power kW	Recommended volume l	Speed rpm	Weight kg
MSB 1/400	0.12	up to 20	380	16
MSB 2/400	0.18	20 - 100	380	18
MSB 3/300	0.25	100 - 300	290	22
MSB 5/400	0.37	300 - 600	380	28
MSB 7/300	0.55	600 - 1.200	290	34
MSB 10/300	0.75	1.200 - 2.500	290	50
MSB 15/200	1.1	2.500 - 4.000	190	56
MSB 20/200	1.5	4.000 - 5.500	190	78
MSB 30/200	2.2	5.500 - 7.500	190	92
MSB 40/200	3	7.500 - 10.000	190	96
MSB 55/200	4	10.000 - 15.000	190	120



MST | Magnetic Drive Agitator

MST is a top-mounted vertical magnetic drive agitator for processes requiring product segregation. It can be configured for high pressures and special materials in chemical, pharmaceutical and food applications.

Model	Power kW	Pressure bar	Maximum capacity l/h
MST	0.25 - 15	0 / +70	-

INTERPUMP
PROCESS TECHNOLOGY

Via G. B. Vico, 2 – 42124 – Reggio Emilia – Italy
Phone + 39 0522 948011
info.ipt@interpumpgroup.it
www.processtechnology.interpump.it

www.jungleadvertising.it - 102026 - REV 1.0 - EN