
KEEP-OUT ZONE

RIGID-FLEX: islands 4L FR-4 1.6 mm; flex hinges 2L polyimide (In1 GND hatch, In2 signals), coverlay both sides, no stiffener; static bend R >= 5 mm

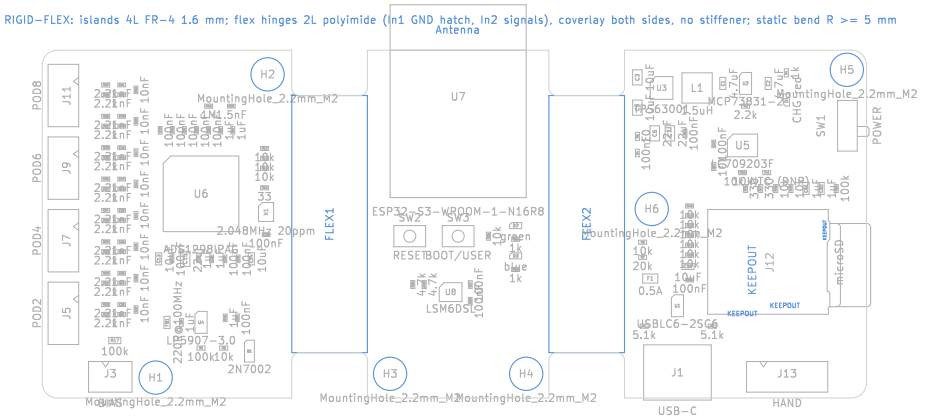

Sheet:		
File: hub_flex.kicad_pcb		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1