
Active dry-electrode pod: 2 x 10 mm ENIG electrodes, 20 mm IED, OPA2376 buffers

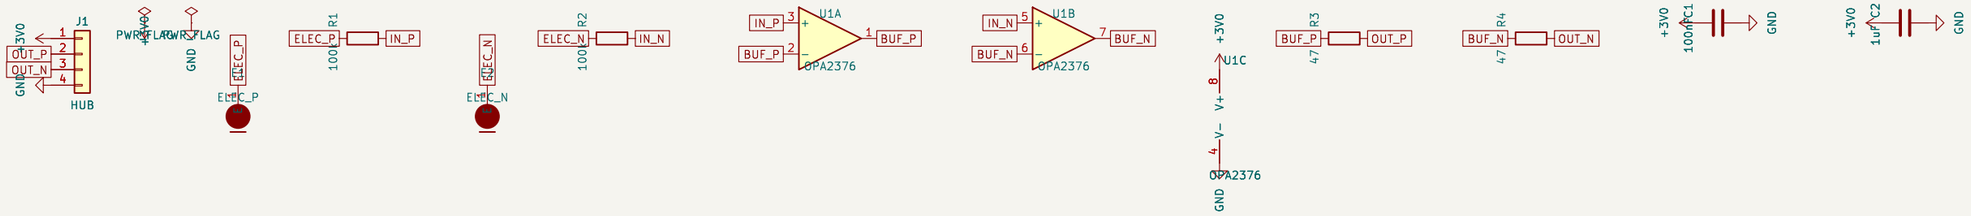

Electrodes E1/E2 are bare ENIG pads on the PCB bottom (skin side), 20 mm centre-to-centre (SENIAM).
R1/R2 (100k) limit current into the body to < 33 uA under any single fault (3.3 V across 100k).
Buffer outputs also drive the solder-masked guard rings around each electrode (bootstrapped guard).
R3/R4 isolate the op-amp outputs from cable capacitance. Body is biased to ~1.5 V by the hub RLD.

Generated by hardware/gen/gen_sch.py from the Python netlist - edit the netlist, not this file

FAMA-Net thesis hardware

Sheet: /
File: pod.kicad_sch

Title: FAMA-Band electrode pod - Active dry-electrode pod

Size: A3	Date: 2026-10-24	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1