



UNIVERSITY OF
CAMBRIDGE

S2 Advanced Statistical Methods for Data Science - Coursework Assignment

Raunaq Rai (rsr45@cam.ac.uk)

Data Intensive Science, Department of Physics, University of Cambridge

04 April, 2025

Word Count: 2991

Introduction

The Antikythera Mechanism is one of the most remarkable technological discoveries from the ancient world. Found in 1901 (by accident) in a shipwreck near the Greek island of Antikythera, the device dates back to between 140 and 60 BCE (perhaps another opportunity for bayesian inference). What makes it so extraordinary is its system of bronze gears, which could be manually turned to display a wide range of astronomical phenomena. Housed in a wooden box, the mechanism likely showed the positions of the Sun and Moon, lunar phases, eclipse predictions, and even events tied to the ancient Greek calendar such as the Olympic Games [1].

Researchers have reconstructed parts of the mechanism and gained a clearer picture of its workings. One key component is the calendar ring — a circular disk punctured with holes arranged around its edge. Only part of this ring survives, but it provides clues to the type of calendar the device may have used. While it was once thought to represent a 365-day solar calendar, analysis suggests it instead follows a 354-day lunar cycle [2].

In this project, we use Bayesian Inference to infer how many holes the full ring originally contained. Using the known positions of 81 holes across eight broken and misaligned fragments, we apply Hamiltonian Monte Carlo to estimate the total number of holes. We use two models for positional uncertainty: one with isotropic Gaussian error, and one separating radial and tangential components[3]. By comparing the results from both models, we aim to determine which best fits the data and what this can tell us about how the mechanism was designed and about the way time was measured in the ancient world.

1 Measured Hole Locations

The dataset [4] contains the x and y coordinates of 81 holes in the surviving fragments of the calendar ring. These holes are distributed across eight fragments, each of which is colour-coded in Figure 2.

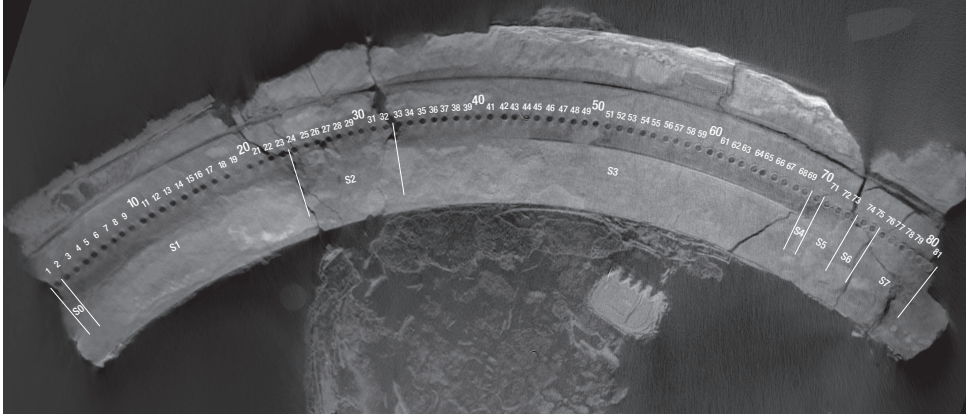


Figure 1: X-ray image of the surviving fragments of the Antikythera Mechanism.

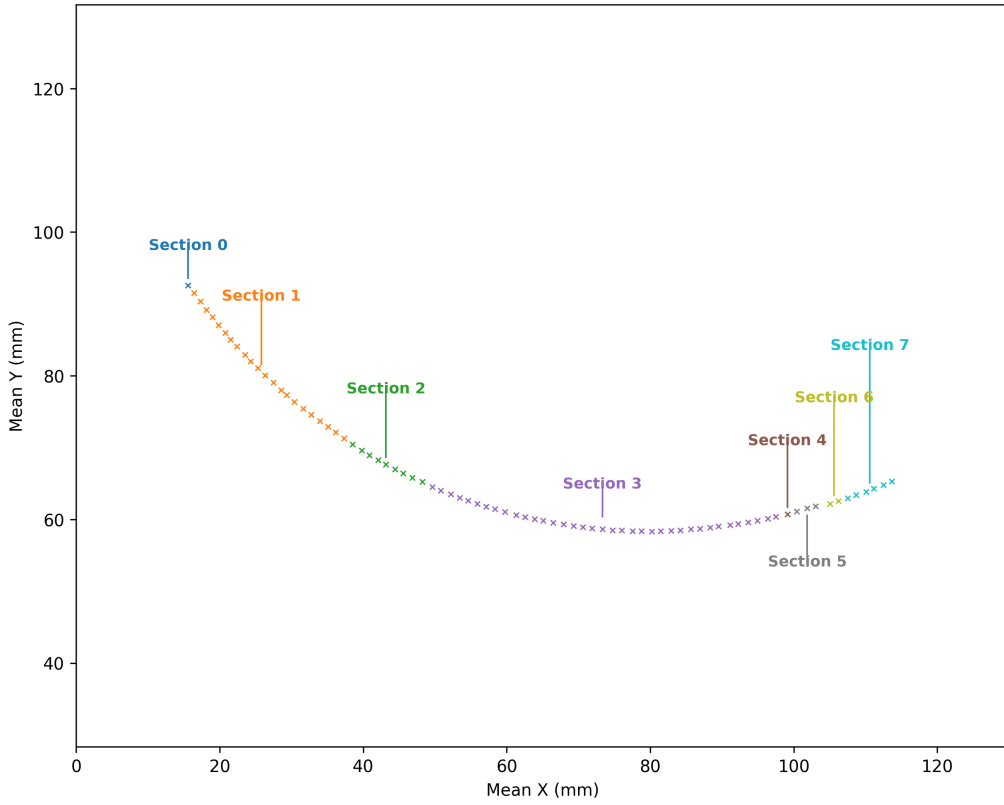


Figure 2: Measured hole locations $d_i \in \mathbb{R}^2$ in the x - y plane, colour-coded by fractured ring segment. Section labels are placed to minimise overlap and connected to the median point of each segment.

2 Hole Location model

Following the model described in Section 2 of Woan and Bayley [3], we assume that the original calendar ring contained N holes, evenly spaced around a circle of radius r . Each fragment is slightly misaligned due to relative translations and in-plane rotations.

$$\vec{m}_i = \begin{pmatrix} x_i \\ y_i \end{pmatrix} = \begin{pmatrix} r \cos \left(\frac{2\pi(i-1)}{N} + \alpha_j \right) + x_{0j} \\ r \sin \left(\frac{2\pi(i-1)}{N} + \alpha_j \right) + y_{0j} \end{pmatrix}, \quad (1)$$

where (x_{0j}, y_{0j}) is the translation of section j , and α_j is its relative angular offset. The model assumes all fragments lie in the same x - y plane and are internally undistorted.

3 Likelihood Model

To assess how well a proposed model predicts the observed hole positions, we assume that each measured hole location $\vec{d}_i = (x_i, y_i)$ is an independent realisation from a two-dimensional Gaussian distribution centred on a predicted location $\vec{m}_i = (x_i^{\text{model}}, y_i^{\text{model}})$. The set of all measurements is denoted $D = \{\vec{d}_i \mid i = 1, \dots, N_{\text{holes}}\}$, with $N_{\text{holes}} = 81$.

3.1 General Form of the Likelihood

Assuming independent Gaussian errors, the likelihood for a single hole is:

$$p(\vec{d}_i \mid \vec{m}_i, \Sigma) = \frac{1}{2\pi\sqrt{|\Sigma|}} \exp\left(-\frac{1}{2}(\vec{d}_i - \vec{m}_i)^\top \Sigma^{-1}(\vec{d}_i - \vec{m}_i)\right), \quad (2)$$

where Σ is the 2×2 covariance matrix characterising the uncertainty. Aggregating over all holes, the full log-likelihood is:

$$\log \mathcal{L}(D \mid \theta) = -\frac{1}{2} \sum_{i=1}^{N_{\text{holes}}} \left[(\vec{d}_i - \vec{m}_i)^\top \Sigma^{-1}(\vec{d}_i - \vec{m}_i) + \log(2\pi|\Sigma|) \right], \quad (3)$$

where θ denotes the full set of model parameters:

$$\theta = \{N, r, \text{error parameters in } \Sigma, (x_j, y_j, \alpha_j) \text{ for } j = 0, \dots, 7\}.$$

3.2 Isotropic Gaussian Error Model

In the isotropic case, errors in x and y directions are assumed equal and uncorrelated:

$$\Sigma = \sigma^2 I, \quad \Sigma^{-1} = \frac{1}{\sigma^2} I, \quad |\Sigma| = \sigma^4, \quad (4)$$

with a single noise parameter σ . Substituting into the log-likelihood yields:

$$\log \mathcal{L}(D \mid \theta) = -\frac{1}{2\sigma^2} \sum_{i=1}^{N_{\text{holes}}} \left\| \vec{d}_i - \vec{m}_i \right\|^2 - \frac{N_{\text{holes}}}{2} \log(2\pi\sigma^2). \quad (5)$$

3.3 Anisotropic Radial–Tangential Error Model

To account for direction-dependent uncertainty, we define a local radial–tangential frame for each hole. Given angular position ϕ_i , the unit vectors are:

$$\hat{r}_i = \begin{pmatrix} \cos \phi_i \\ \sin \phi_i \end{pmatrix}, \quad \hat{t}_i = \begin{pmatrix} -\sin \phi_i \\ \cos \phi_i \end{pmatrix}. \quad (6)$$

The displacement between predicted and observed positions is:

$$\vec{\delta}_i = \vec{d}_i - \vec{m}_i. \quad (7)$$

Projected onto the local basis:

$$\delta_{r,i} = \hat{r}_i^\top \vec{\delta}_i, \quad \delta_{t,i} = \hat{t}_i^\top \vec{\delta}_i. \quad (8)$$

Mahalanobis Distance and Log-Likelihood

The Mahalanobis distance generalises Euclidean distance by incorporating directional uncertainty:

$$D_i^2 = \begin{pmatrix} \delta_{r,i} \\ \delta_{t,i} \end{pmatrix}^\top \begin{pmatrix} 1/\sigma_r^2 & 0 \\ 0 & 1/\sigma_t^2 \end{pmatrix} \begin{pmatrix} \delta_{r,i} \\ \delta_{t,i} \end{pmatrix} = \frac{\delta_{r,i}^2}{\sigma_r^2} + \frac{\delta_{t,i}^2}{\sigma_t^2}. \quad (9)$$

This distance penalises deviations more strongly in directions of higher precision. It replaces the quadratic form in Equation (2) for the anisotropic case, leading to:

$$\log \mathcal{L}(D \mid \theta) = -\frac{1}{2} \sum_{i=1}^{N_{\text{holes}}} [D_i^2 + \log(2\pi\sigma_r\sigma_t)], \quad (10)$$

where the covariance determinant is $|\Sigma_{\text{rt}}| = \sigma_r^2\sigma_t^2$.

3.4 Parameter Summary

- N and r define the angular placement and radius of holes around the full ring.
- (x_j, y_j, α_j) describe the translation and rotation of each fractured segment.
- σ (isotropic) or (σ_r, σ_t) (anisotropic) define the scale of measurement uncertainty and influence both the distance and normalisation terms in the log-likelihood.

Both error models were implemented in NumPy and JAX.

4 Derivatives of Log-Likelihood

We computed the gradient of the Log-Likelihood with respect to the model parameters θ_μ :

$$\frac{\partial}{\partial \theta_\mu} \log L(\mathcal{D} \mid \theta) \quad (11)$$

For the derivatives we used automatic differentiation via the jax library. The log-likelihood was implemented in a JAX-compatible format, which allowed for straightforward computation of the gradient and Hessian via automatic differentiation (as shown in the previous research coursework).

To ensure the correctness of the computed gradients, we also implemented a finite difference approximation using central differences:

$$\frac{\partial \log L}{\partial \theta_\mu} \approx \frac{\log L(\theta_\mu + \epsilon) - \log L(\theta_\mu - \epsilon)}{2\epsilon} \quad (12)$$

This was compared against the JAX gradients for all parameters. We evaluated both methods at a set of arbitrary parameter values that we selected manually. This allowed us to verify that the automatic differentiation mechanism worked correctly. As an additional check, we computed both forward-mode and reverse-mode gradients using jax's functions, and confirmed consistency across modes.

$$\text{Relative Difference} = \frac{|\nabla_{\text{JAX}} - \nabla_{\text{FD}}|}{|\nabla_{\text{FD}}| + \epsilon} \quad (13)$$

The relative differences were found to be negligible, confirming the accuracy of the automatic differentiation approach.

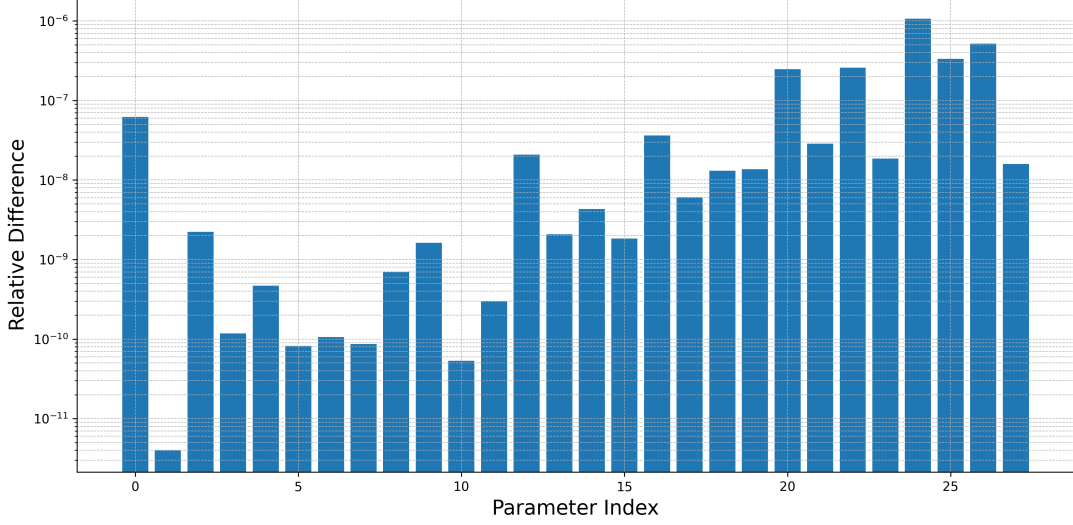


Figure 3: Relative difference between gradients computed via JAX autodiff and finite differences. Each bar corresponds to a parameter θ_μ .

5 Maximum Likelihood Estimation

To estimate the best-fitting model parameters, we performed maximum likelihood estimation (MLE) for both the isotropic and anisotropic covariance models. Sections 0 and 4, which each contained only a single hole, were excluded for all subsequent analysis.

We used the L-BFGS-B optimisation algorithm [5] to maximise the log-likelihood function, with gradients computed via automatic differentiation using jax.

Initialisation values were based on the values presented by Woan and Bayley[3] with small perturbations added. Parameter bounds were also applied ensuring physical validity.

The optimiser returned the following result:

Maximised Log-Likelihood = 230.67, with parameter estimates:

Parameter	Value
N	355.138
R	77.320
σ_r	0.0258
σ_t	0.1226
ϕ_1	-2.5257
ϕ_2	-2.1357
ϕ_3	-1.9742
ϕ_4	-1.3215
ϕ_5	-1.2632
ϕ_6	-1.2531
$x_{\text{offset},1}$	79.677
$x_{\text{offset},2}$	79.897
$x_{\text{offset},3}$	79.858

$x_{\text{offset},4}$	81.373
$x_{\text{offset},5}$	81.558
$x_{\text{offset},6}$	83.220
$y_{\text{offset},1}$	136.019
$y_{\text{offset},2}$	135.701
$y_{\text{offset},3}$	135.690
$y_{\text{offset},4}$	136.067
$y_{\text{offset},5}$	135.838
$y_{\text{offset},6}$	136.402

Table 1: Maximum likelihood estimates for the anisotropic model parameters.

Using these parameters, we predicted the expected hole positions for each section and overlaid them on the measured hole locations (Figure 4). To reduce clutter, the predicted points were vertically shifted by 10 mm and arrows were added.

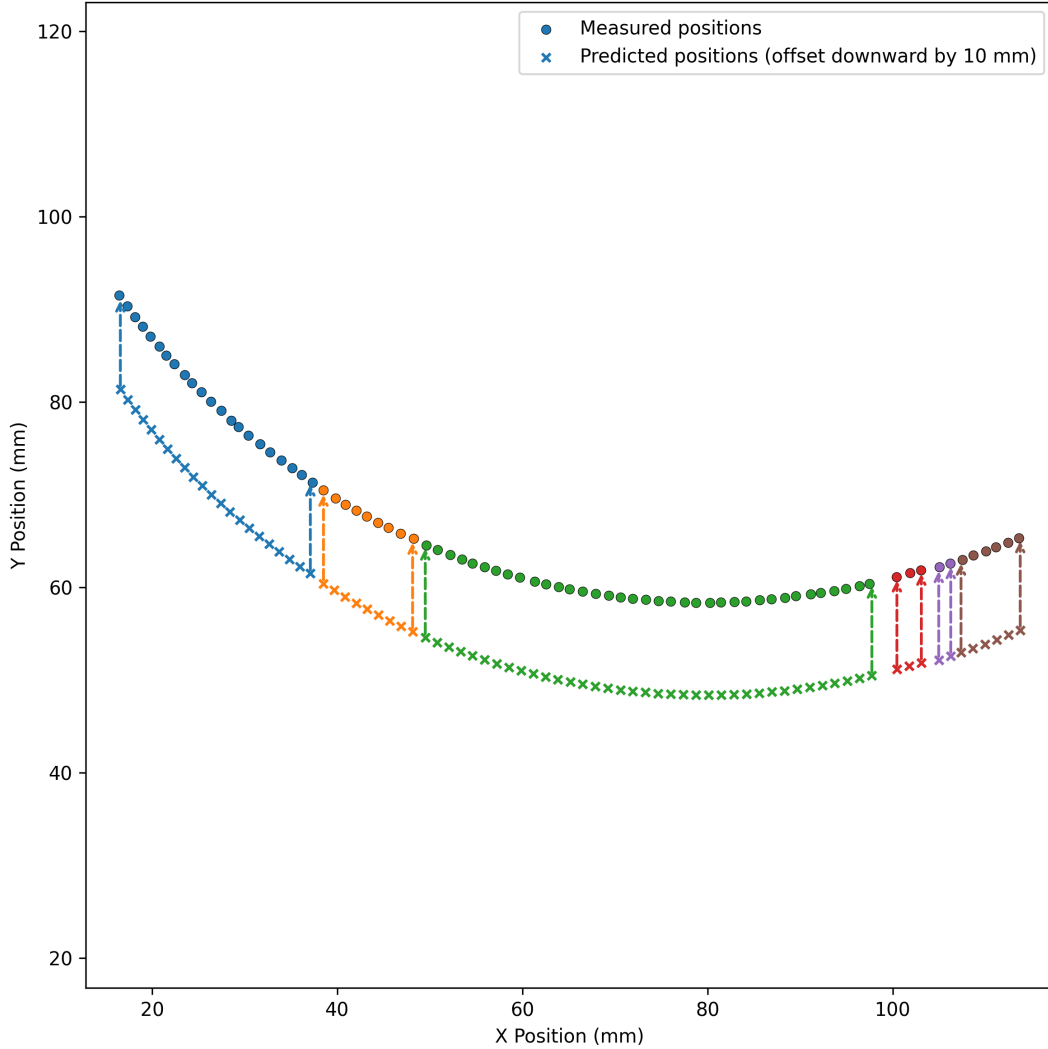


Figure 4: Measured hole positions overlaid with predicted positions from the anisotropic model, vertically shifted by 10 mm for clarity. Arrows connect the first and last predicted points in each section to their true model locations. MLE estimation: $N = 355.138$, $R = 77.320$.

We repeated the optimisation process for the isotropic model, where a single shared uncertainty parameter σ is used for both radial and tangential directions.

The optimiser returned the following result:

Maximised Log-Likelihood: -20.37 , with parameter estimates:

Parameter	Value
N	354.953
R	77.278
σ	0.1249
ϕ_1	-2.5255
ϕ_2	-2.1350
ϕ_3	-1.9745
ϕ_4	-1.3183
ϕ_5	-1.2668
ϕ_6	-1.2531
$x_{\text{offset},1}$	79.640
$x_{\text{offset},2}$	79.828
$x_{\text{offset},3}$	79.862
$x_{\text{offset},4}$	81.147
$x_{\text{offset},5}$	81.839
$x_{\text{offset},6}$	83.241
$y_{\text{offset},1}$	136.016
$y_{\text{offset},2}$	135.690
$y_{\text{offset},3}$	135.639
$y_{\text{offset},4}$	135.961
$y_{\text{offset},5}$	135.885
$y_{\text{offset},6}$	136.362

Table 2: Maximum likelihood estimates for the isotropic model parameters.

As before, we predicted the hole positions using the optimised parameters and overlaid them on the measured data (Figure 5).

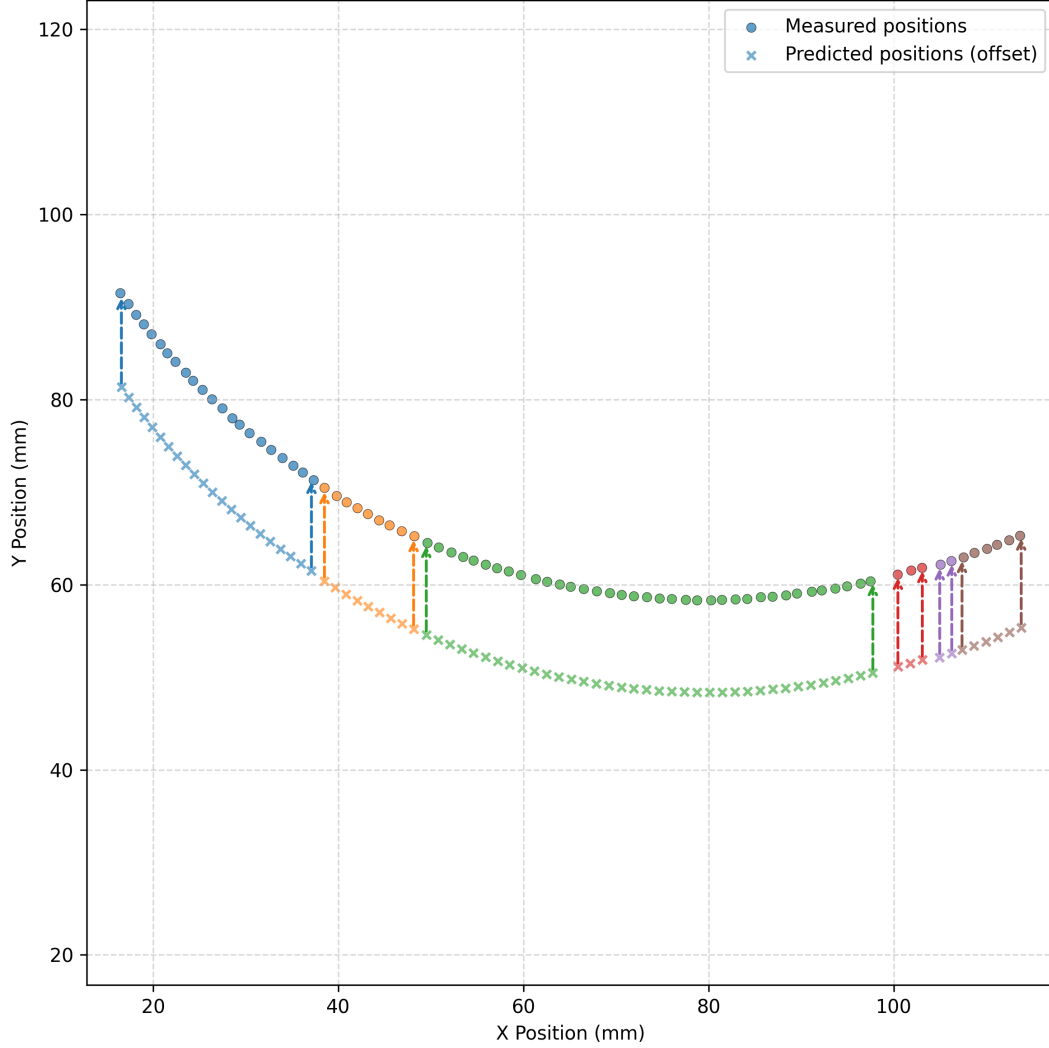


Figure 5: Measured hole positions overlaid with predicted positions from the isotropic model, vertically shifted by 10 mm for clarity. Arrows connect the first and last predicted points in each section to their true model locations. MLE estimation: $N = 354.953$, $R = 77.378$.

Comparing the two models, the anisotropic version achieved a higher maximised log-likelihood ($\log \mathcal{L} = 230.67$) compared to the isotropic model ($\log \mathcal{L} = -20.37$). This difference suggests that allowing separate treatment of radial and tangential uncertainties provides a better fit to the measured hole positions.

6 Bayesian Inference and Posterior Sampling

We performed Bayesian inference using Hamiltonian Monte Carlo (HMC) sampling[6]. This allowed us to estimate the full posterior distributions of the model parameters, incorporating prior knowledge and the observed data.

HMC simulates a particle moving through the parameter space under a fictional physical system, using gradients of the log-posterior to propose distant, high-probability samples efficiently.

The priors were informed by previous literature, physical considerations and the hypothesis that the mechanism tracks a lunar calendar. These priors are summarised below

and visualised in Figure 6:

- Total number of holes: $N \sim \mathcal{N}(354.4, 3.5)$, reflecting the hypothesis that the calendar ring encodes a lunar year of 12 months (each ≈ 29.53 days). The mean is informed by our own maximum likelihood estimate (MLE), as well as historical interpretations of the mechanism’s purpose as a calendrical device [7][8][9].
- Ring radius: $R \sim \mathcal{N}(77.35, 2)$, based on the MLE results and results published by Woan and Bayley [3].
- Uncertainties:
 - For the anisotropic model, radial and tangential uncertainties were given log-normal priors to reflect the fact that uncertainties cannot be negative. The peaks of these priors also align with results from our MLE and results published by Woan and Bayley [3].

$$\sigma_r \sim \text{LogNormal}(\log(0.028), 0.25), \quad \sigma_t \sim \text{LogNormal}(\log(0.13), 0.3).$$

- For the isotropic model, the shared uncertainty parameter was:

$$\sigma \sim \text{LogNormal}(\log(0.13), 0.45).$$

- Section-specific parameters: angular offsets ϕ_j , and spatial offsets x_j, y_j . Were chosen to align with our MLE results as well as results published by Woan and Bayley [3]. These were given a large standard deviation to allow our HMC to explore a broad parameter space looking at within-section misalignments and minor translational shifts between fractured segments:

$$\phi_j \sim \mathcal{N}(-2.5, 0.5), \quad x_j \sim \mathcal{N}(80, 5), \quad y_j \sim \mathcal{N}(135, 5).$$

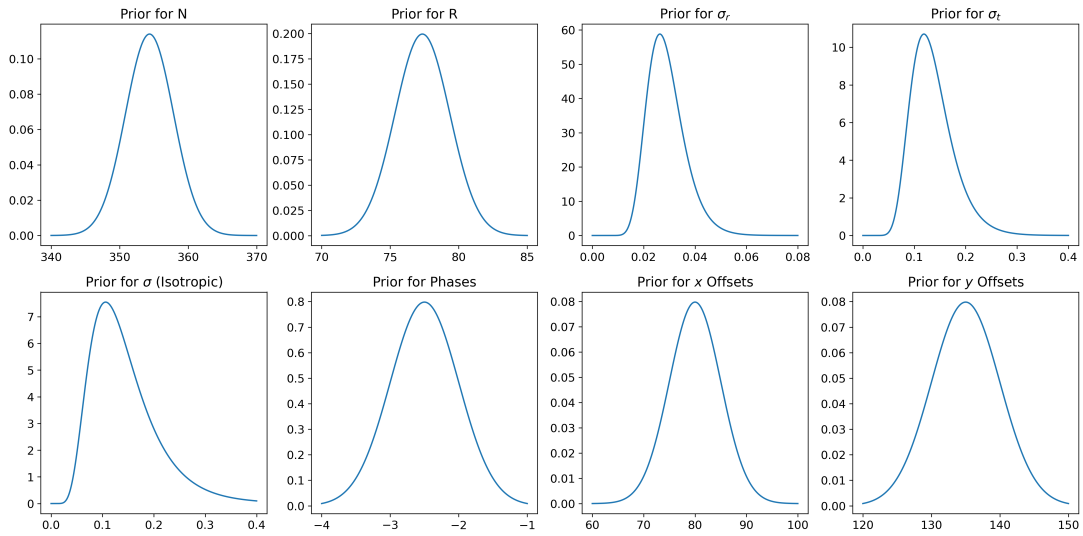


Figure 6: Prior distributions for model parameters.

Posterior sampling was performed using the No-U-Turn Sampler [10], a variant of HMC known for its efficiency in high-dimensional spaces. We used 12 parallel chains

(corresponding to the number of CPU cores on my machine), each with 10,000 warmup steps and 50,000 sampling steps. Initialisation was done via the 'init_to_median' strategy which initialises each parameter based on the median of its prior distribution. This provides a stable and reasonable starting point.

Anisotropic Model Results

For the anisotropic model, trace plots for key parameters (Figure 7) show good mixing and convergence across all chains, with minimal autocorrelation. The posterior distributions and joint correlations between parameters are shown in the corner plot in Figure 8. Detailed estimates and statistics from this model are shown in Table 3.

Parameter	Mean	Std	Median	5%	95%	n_eff	$\hat{R}$
N	355.10	1.27	355.10	352.98	357.17	150089.40	1.00
R	77.31	0.26	77.31	76.89	77.74	140073.39	1.00
phases[0]	-2.53	0.00	-2.53	-2.53	-2.52	266995.91	1.00
phases[1]	-2.14	0.00	-2.14	-2.14	-2.13	549871.36	1.00
phases[2]	-1.97	0.00	-1.97	-1.98	-1.97	169830.53	1.00
phases[3]	-1.32	0.01	-1.32	-1.35	-1.30	407464.84	1.00
phases[4]	-1.26	0.03	-1.26	-1.31	-1.21	376666.94	1.00
phases[5]	-1.25	0.01	-1.25	-1.26	-1.24	488787.59	1.00
σ_r	0.03	0.00	0.03	0.02	0.03	566747.07	1.00
σ_t	0.13	0.01	0.13	0.11	0.15	624075.38	1.00
x_offsets[0]	79.67	0.19	79.67	79.36	79.97	146941.56	1.00
x_offsets[1]	79.90	0.22	79.90	79.54	80.27	287612.22	1.00
x_offsets[2]	79.86	0.03	79.86	79.80	79.91	242810.23	1.00
x_offsets[3]	81.44	1.08	81.44	79.69	83.23	411059.14	1.00
x_offsets[4]	81.51	2.16	81.50	77.97	85.07	378157.08	1.00
x_offsets[5]	83.22	0.38	83.22	82.59	83.85	443628.60	1.00
y_offsets[0]	136.01	0.19	136.01	135.70	136.33	142977.35	1.00
y_offsets[1]	135.69	0.25	135.69	135.28	136.10	159439.48	1.00
y_offsets[2]	135.68	0.26	135.68	135.25	136.12	140196.16	1.00
y_offsets[3]	136.07	0.39	136.07	135.44	136.71	210488.10	1.00
y_offsets[4]	135.78	0.75	135.81	134.57	137.03	303370.16	1.00
y_offsets[5]	136.39	0.28	136.39	135.93	136.85	167609.76	1.00

Table 3: Posterior summary statistics for the anisotropic model parameters.

Table 3 shows that the total number of holes is tightly constrained at 355.10 ± 1.27 with a 90% credible interval of [352.98, 357.17], consistent with a 354-day lunar calendar. The ring radius R also shows low uncertainty. The notable difference between the radial and tangential errors will be discussed later.

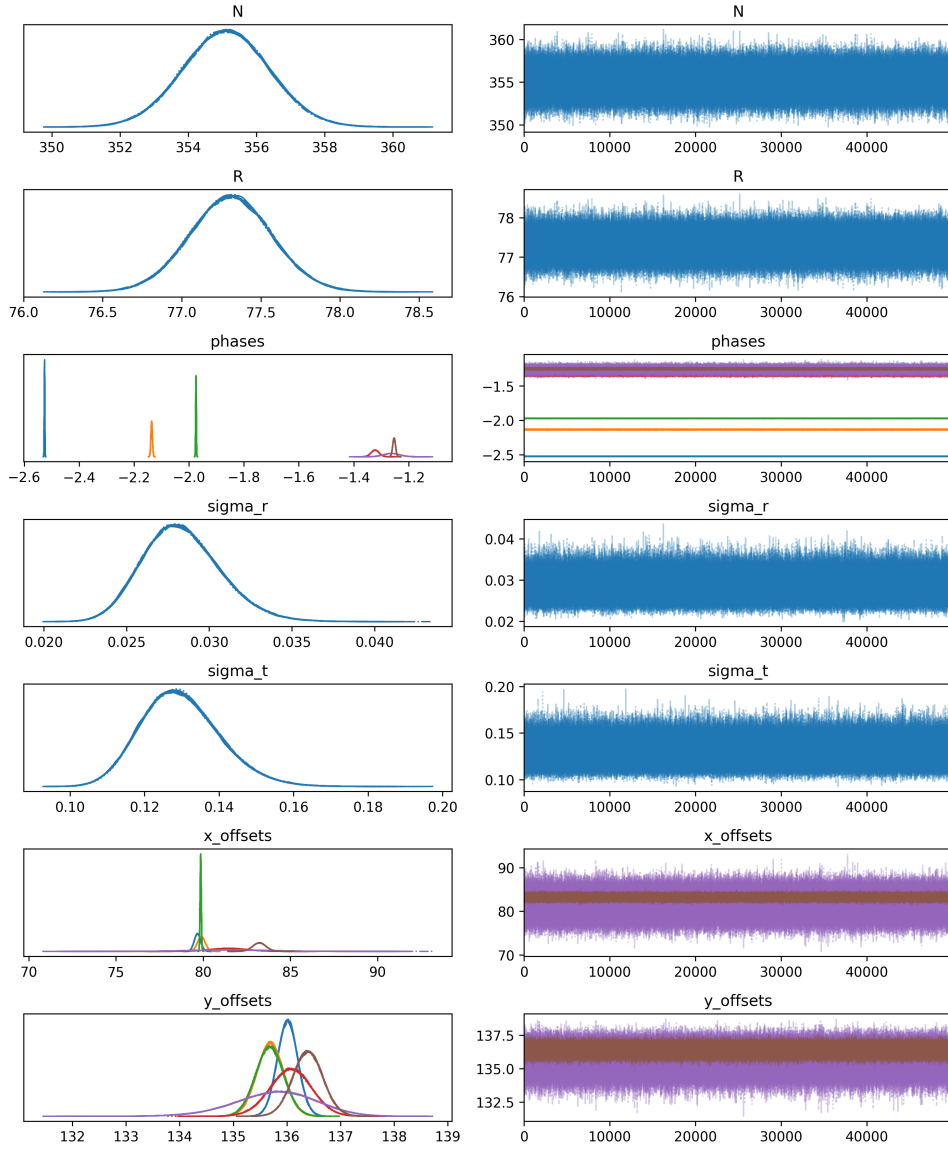


Figure 7: Trace plots for the anisotropic model across all 12 chains

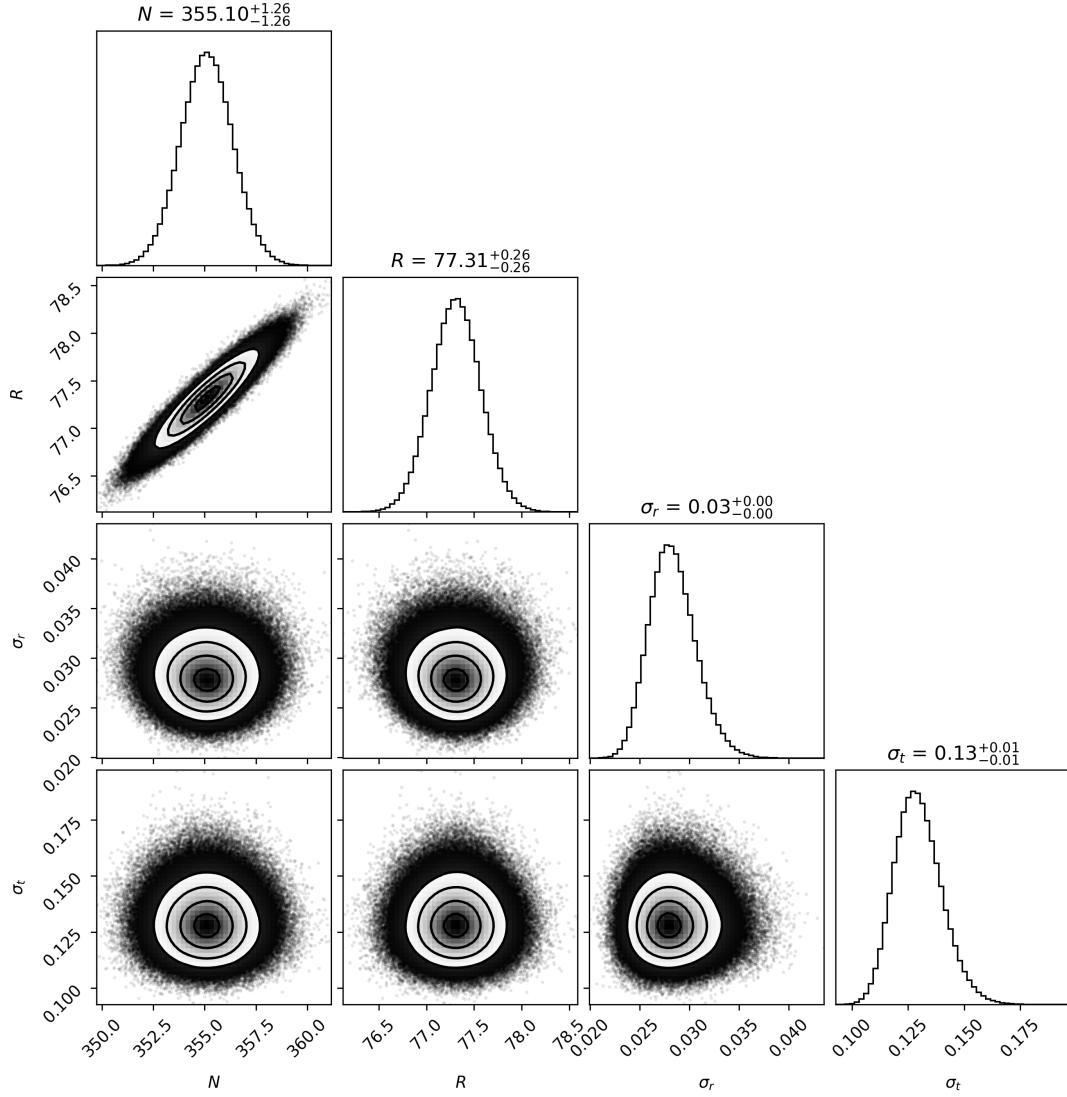


Figure 8: Corner plot showing posterior distributions for the anisotropic model parameters.

Isotropic Model Results

The isotropic model was fit using the same MCMC settings. The trace plots (Figure 9) again demonstrate good convergence, and the corresponding corner plot (Figure 10) summarises the posterior distributions and joint parameter behaviour. Detailed estimates and statistics from this model are shown in Table 4.

Parameter	Mean	Std	Median	5%	95%	n_eff	$\hat{R}$
N	354.50	2.79	354.50	349.91	359.11	189887.40	1.00
R	77.18	0.61	77.18	76.17	78.17	187735.89	1.00
phases[0]	-2.53	0.00	-2.53	-2.53	-2.52	437517.22	1.00
phases[1]	-2.14	0.01	-2.14	-2.16	-2.11	387101.74	1.00
phases[2]	-1.97	0.00	-1.97	-1.98	-1.97	236700.53	1.00
phases[3]	-1.32	0.05	-1.32	-1.40	-1.24	357285.89	1.00
phases[4]	-1.26	0.06	-1.26	-1.36	-1.16	339319.30	1.00
phases[5]	-1.25	0.02	-1.25	-1.29	-1.21	377427.05	1.00

σ	0.14	0.01	0.14	0.12	0.16	448359.76	1.00
x_offsets[0]	79.57	0.47	79.57	78.80	80.34	221776.87	1.00
x_offsets[1]	79.86	0.95	79.86	78.31	81.42	366747.92	1.00
x_offsets[2]	79.85	0.14	79.85	79.63	80.08	481017.58	1.00
x_offsets[3]	81.46	3.62	81.44	75.50	87.41	359572.52	1.00
x_offsets[4]	81.53	4.35	81.49	74.44	88.78	341364.77	1.00
x_offsets[5]	83.04	1.72	83.04	80.18	85.83	378210.55	1.00
y_offsets[0]	135.94	0.48	135.94	135.16	136.73	203864.59	1.00
y_offsets[1]	135.55	0.72	135.55	134.37	136.75	235688.08	1.00
y_offsets[2]	135.54	0.62	135.54	134.52	136.55	187794.31	1.00
y_offsets[3]	135.85	1.16	135.91	133.99	137.77	269183.78	1.00
y_offsets[4]	135.54	1.55	135.65	133.05	138.09	288180.62	1.00
y_offsets[5]	136.16	0.87	136.17	134.75	137.60	248778.41	1.00

Table 4: Posterior summary statistics for the isotropic model parameters.

Table 4 shows that the inferred total number of holes is 354.50 ± 2.79 , with wider uncertainty than the anisotropic case, though still broadly consistent with a lunar calendar. The radius estimate is notably less precise.

The shared uncertainty parameter $\sigma = 0.14 \pm 0.01$ mm reflects the model’s assumption of equal error in all directions. Compared to the anisotropic model, posterior uncertainties are generally larger, reflecting a poorer overall fit. Nonetheless, all parameters demonstrate strong convergence and effective sampling.

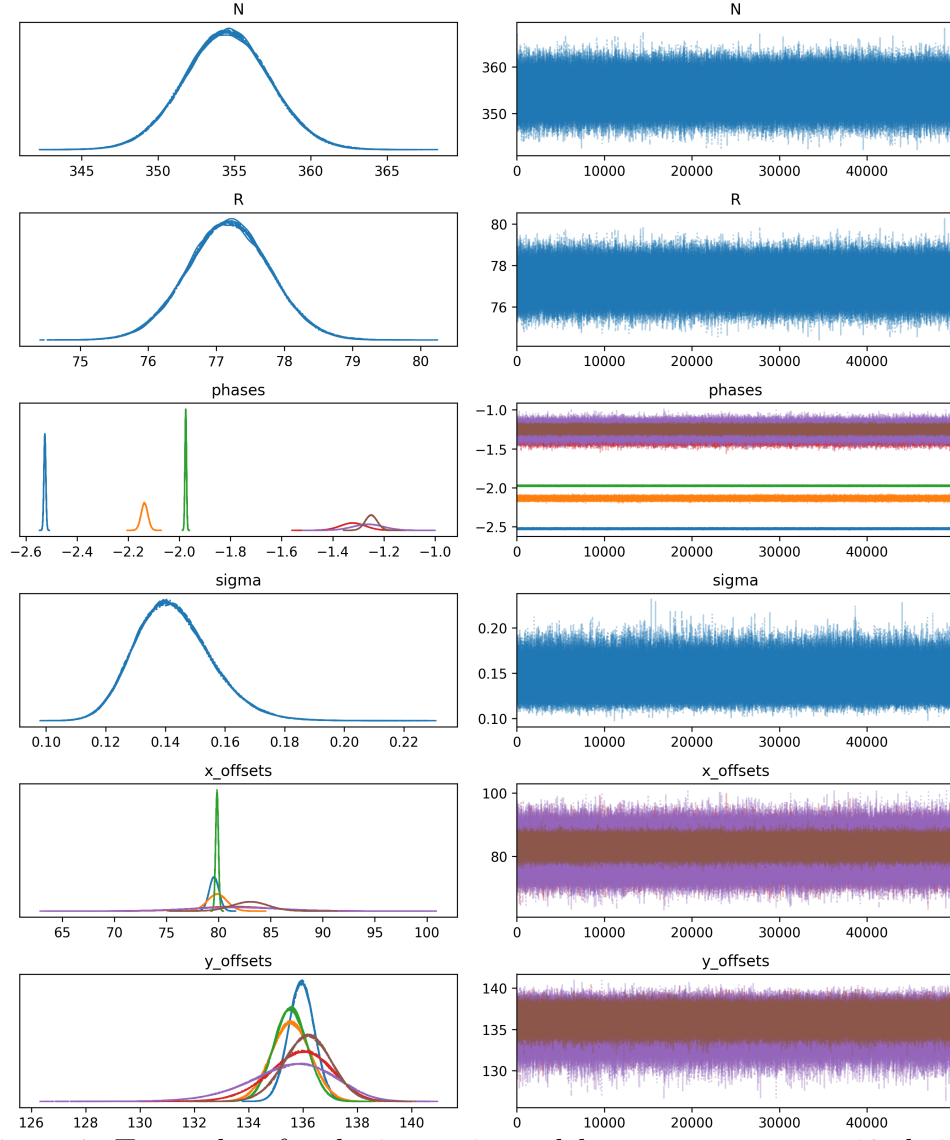


Figure 9: Trace plots for the isotropic model parameters across 12 chains.


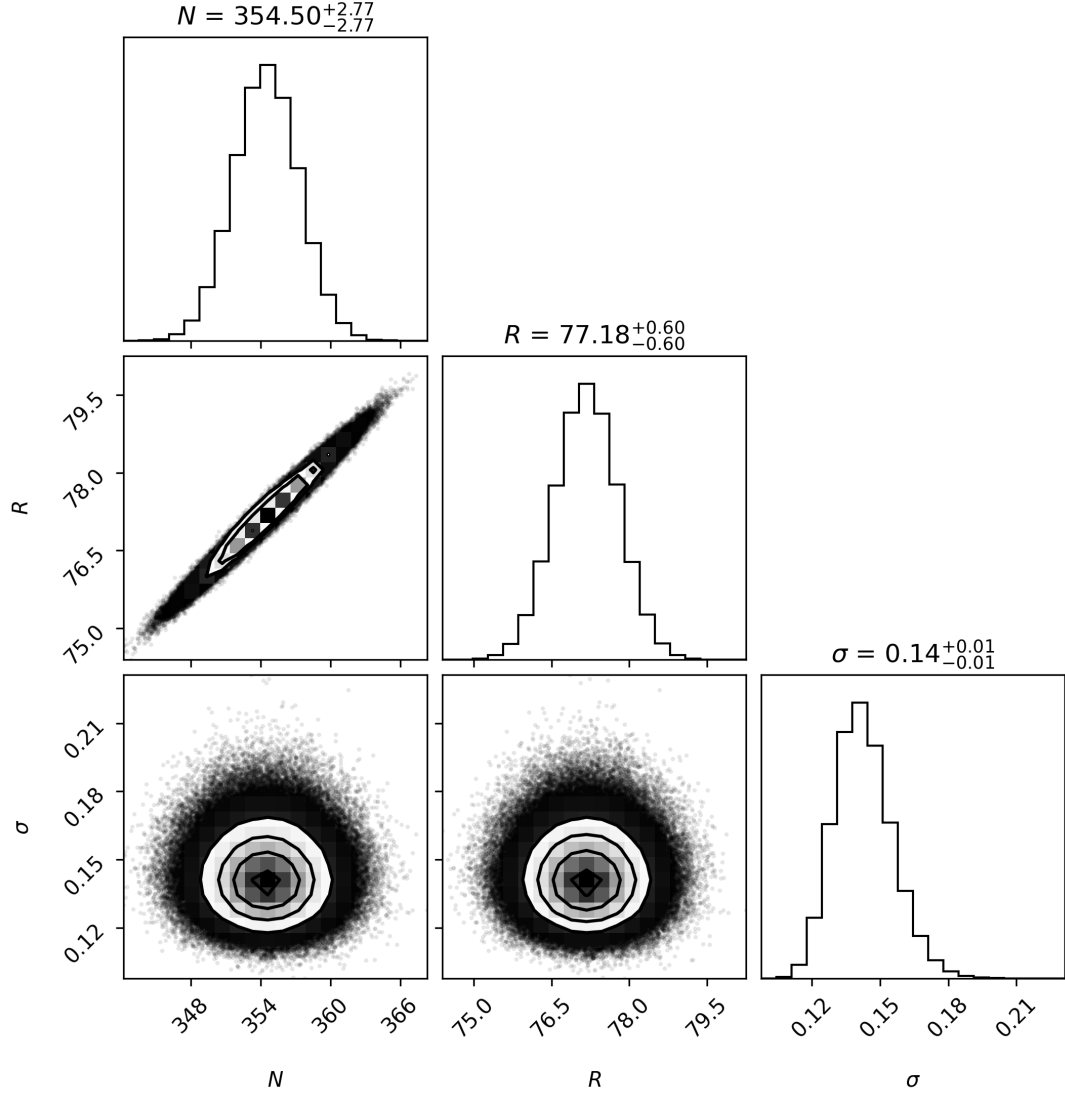


Figure 10: Corner plot showing the posterior distributions for the isotropic model parameters.

Posterior predictive distribution - Section 1 Hole 5

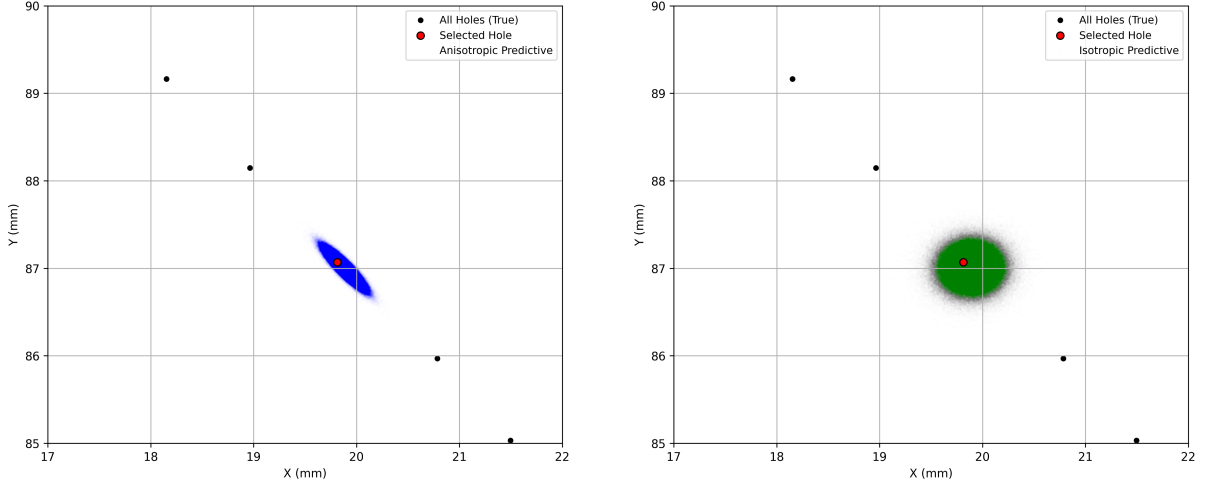

(a) Anisotropic model

(b) Isotropic model

Figure 11: Posterior predictive distributions for the position of a single hole (Section 1, Hole 5) under the anisotropic and isotropic models. Black dots show other holes in the selected section; the red dot marks the true location of the selected hole. Blue and green dots represent posterior predictive samples under each model.

The anisotropic model produces an elliptical distribution, as shown in Figure 11a. This shape reflects the assumption that uncertainty differs between the radial and tangential directions. Radial positions are better constrained due to the curvature of the ring, while tangential offsets are more sensitive to misalignments between broken fragments. This results in a tight ellipse along the radial direction and a broader spread tangentially.

In the isotropic case, the posterior predictive samples form a near-circular cloud around the true location as shown in Figure 11b. This is consistent with the assumption of equal measurement uncertainty in all directions.

The sharpness and clarity of these distributions are a result of the large number of posterior samples used - 600,000 raw samples were produced.

7 Covariance Structure and Model Comparison

In two dimensions, the covariance matrix Σ defines the shape and orientation of the uncertainty ellipse around each predicted hole location $\vec{m}_i$. In the isotropic case, the same uncertainty is assumed in all directions, leading to circular error regions:

$$\Sigma = \sigma^2 I.$$

However, this may be overly simplistic. A more physically realistic model accounts for different uncertainty along the radial and tangential directions of the ring:

$$\Sigma_{\text{rt}} = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_t^2 \end{pmatrix}$$

This anisotropic model reflects that measurement uncertainty is typically larger in the direction around the ring (tangential) than towards/away from the centre (radial), especially when holes are arc-fitted or distorted by curvature.

Model Comparison

We used the Savage-Dickey density ratio to compute the Bayes factor between the isotropic and anisotropic models. This method is valid when one model (the isotropic model) is a special case of the other (anisotropic model), obtained by setting a specific parameter to a fixed value.

The isotropic model corresponds to $\Delta = \sigma_t - \sigma_r = 0$, where the radial and tangential uncertainties are equal. The Savage-Dickey ratio compares the posterior and prior densities of this parameter at $\Delta = 0$:

$$\text{Bayes Factor} = \frac{p(\Delta = 0 \mid D)}{p(\Delta = 0)}.$$

We estimated these densities using kernel density estimation applied to posterior and prior samples of Δ . The posterior placed almost no probability mass at $\Delta = 0$, whereas the prior allowed moderate support:

Posterior density at $\Delta = 0$: 0.00000, Prior: 0.00868,

$\Rightarrow$ Bayes Factor (isotropic vs. anisotropic) ≈ 0.000 .

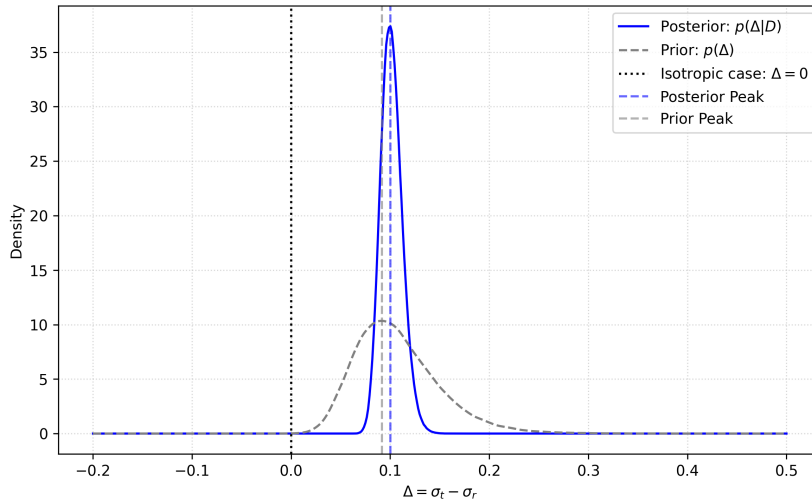


Figure 12: Savage-Dickey density ratio comparing prior and posterior densities of $\Delta = \sigma_t - \sigma_r$.

The posterior distribution is sharply peaked away from zero, which is evidence against the isotropic model. The data favours a model in which radial and tangential uncertainties differ. The radial–tangential error structure likely arises from the way the ring was manufactured - with uncertainty elongated along the arc.

Nested Sampling and Log-Evidence Comparison

We used nested sampling to estimate the evidence for each model. Unlike the Savage-Dickey ratio, nested sampling provides a measure of how well a model explains the data across its entire parameter space.

The evidence for a model $\mathcal{M}$ is defined as:

$$\log Z = \log \int \mathcal{L}(\theta) \pi(\theta) d\theta,$$

where $\mathcal{L}(\theta)$ is the likelihood and $\pi(\theta)$ is the prior. A greater evidence indicates a better balance between goodness-of-fit and model complexity.

We used the dynesty library with 500 live points and the ‘rwalk’ sampling method. The log-likelihood function was compiled using jax.jit for speed, and the prior transform was matched to the priors used in our Bayesian inference. Corner plots for these are shown in the appendix in Figures 13 and 14.

The resulting log-evidence estimates were:

$$\log Z_{\text{aniso}} = 126.75 \pm 0.72, \quad \log Z_{\text{iso}} = -111.94 \pm 0.65.$$

The difference in log-evidence,

$$\Delta \log Z = \log Z_{\text{aniso}} - \log Z_{\text{iso}} = 238.69 \pm 0.97,$$

is in favour of the anisotropic model: a log-evidence difference above 100 is decisive evidence for the use of the Anisotropic model.

Together with the Savage-Dickey result, this confirms that the data clearly favour a model that allows for separate treatment of radial and tangential uncertainties.

Conclusion

The anisotropic model consistently outperformed the isotropic model. It provided more accurate posterior predictive distributions for individual hole positions, capturing elliptical error structures consistent with physical intuition. Quantitatively, the Savage-Dickey ratio yielded a Bayes factor near zero in favour of the isotropic model. Furthermore, nested sampling revealed a substantial log-evidence difference of $\Delta \log Z \approx 268$ in favour of the anisotropic model.

Beyond statistical performance, the anisotropic model offers a more realistic representation of the measurement process - while radial positions are relatively well constrained by the curvature of the ring, tangential positions are more susceptible to misalignment and fragment distortion. This is reflected in the recovered posterior: $\sigma_r < \sigma_t$ with high confidence.

In summary, our Anisotropic HMC analysis yields a total hole count of 355.1 ± 1.26 , with a 90% credible interval ranging from 352.98 to 357.16 which is consistent with a 354-day lunar calendar.

References

- [1] John H. Seiradakis and Michael G. Edmunds. Our current knowledge of the antikythera mechanism. *Nature Astronomy*, 2:35–42, 2018. doi: 10.1038/s41550-017-0347-2.
- [2] C. Budiselic, A. T. Thoeni, M. Dubno, and A. T. Ramsey. Antikythera mechanism shows evidence of lunar calendar. *The Horological Journal*, March 2021. doi: 10.31235/osf.io/fzp8u.

- [3] G. Woan and J. Bayley. An improved calendar ring hole-count for the antikythera mechanism: A fresh analysis. *The Horological Journal*, 2024. doi: 10.48550/arXiv.2403.00040.
- [4] A. Thoeni, C. Budiselic, and A. T. Ramsey. Replication data for: Antikythera mechanism shows evidence of lunar calendar. <https://doi.org/10.7910/DVN/VJGLVS>, 2019.
- [5] Dong C. Liu and Jorge Nocedal. On the limited memory bfgs method for large scale optimization. *Mathematical Programming*, 45(1–3):503–528, Aug 1989. doi: 10.1007/BF01589116. URL <https://doi.org/10.1007/BF01589116>.
- [6] Michael Betancourt. A conceptual introduction to hamiltonian monte carlo, 2018. URL <https://arxiv.org/abs/1701.02434>.
- [7] Tony Freeth. Eclipse prediction on the ancient greek astronomical calculating machine known as the antikythera mechanism. *PLoS ONE*, 9(7):e103275, 2014. doi: 10.1371/journal.pone.0103275. URL <https://doi.org/10.1371/journal.pone.0103275>.
- [8] James Evans and Christián C. Carman. Babylonian solar theory on the antikythera mechanism. *Archive for History of Exact Sciences*, 73(6):619–659, 2019. doi: 10.1007/s00407-019-00237-9.
- [9] Derek de Solla Price. Gears from the greeks. the antikythera mechanism: A calendar computer from ca. 80 bc. *Transactions of the American Philosophical Society*, 64(7): 1–70, 1974.
- [10] Matthew D. Hoffman and Andrew Gelman. The no-u-turn sampler: Adaptively setting path lengths in hamiltonian monte carlo, 2011. URL <https://arxiv.org/abs/1111.4246>.

Corner Plots from Nested Sampling

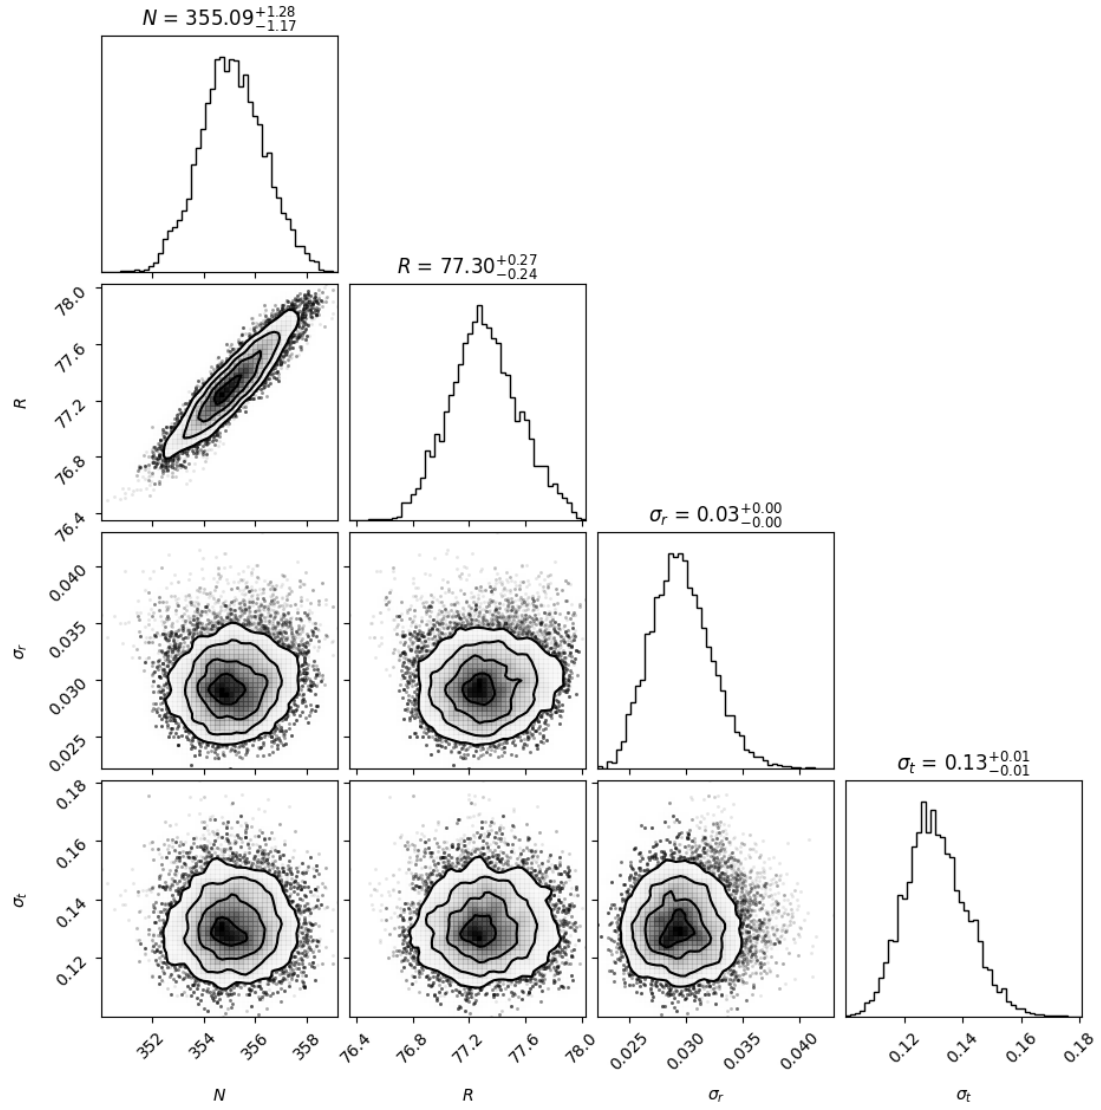


Figure 13: Corner plot from nested sampling for the anisotropic model

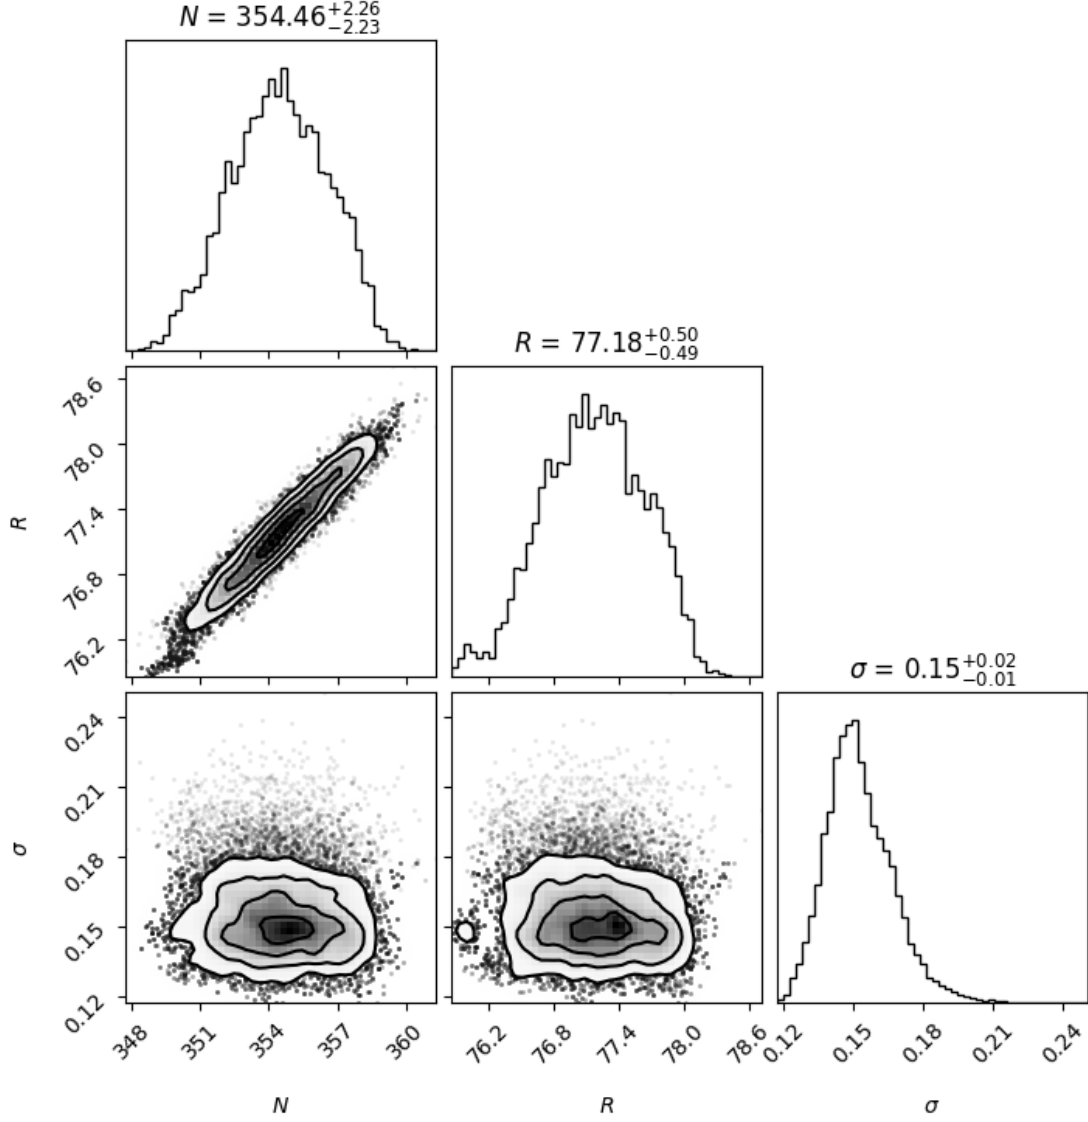


Figure 14: Corner plot from nested sampling for the isotropic model

Declaration of Use of AI Tools

I declare that all ideas, methods, and approaches used in this project were conceived and developed independently through my own research, understanding and engagement with lecture and supervision material. The work presented here is entirely my own.

The following AI tools were used for support purposes:

- **ChatGPT:** Used to refine code snippets, assist with LaTeX formatting, and improve the clarity and structure. All content generated by this tool was critically evaluated and adapted.
- **GitHub Copilot:** Used to suggest coding snippets and assist the implementation of functions. All suggested code was reviewed, modified, and tested.